


Through-beam sensor transmitter

OAS-000A/O.MONTZU



- 1 Cover
one transmitting diode each in upper and lower lens

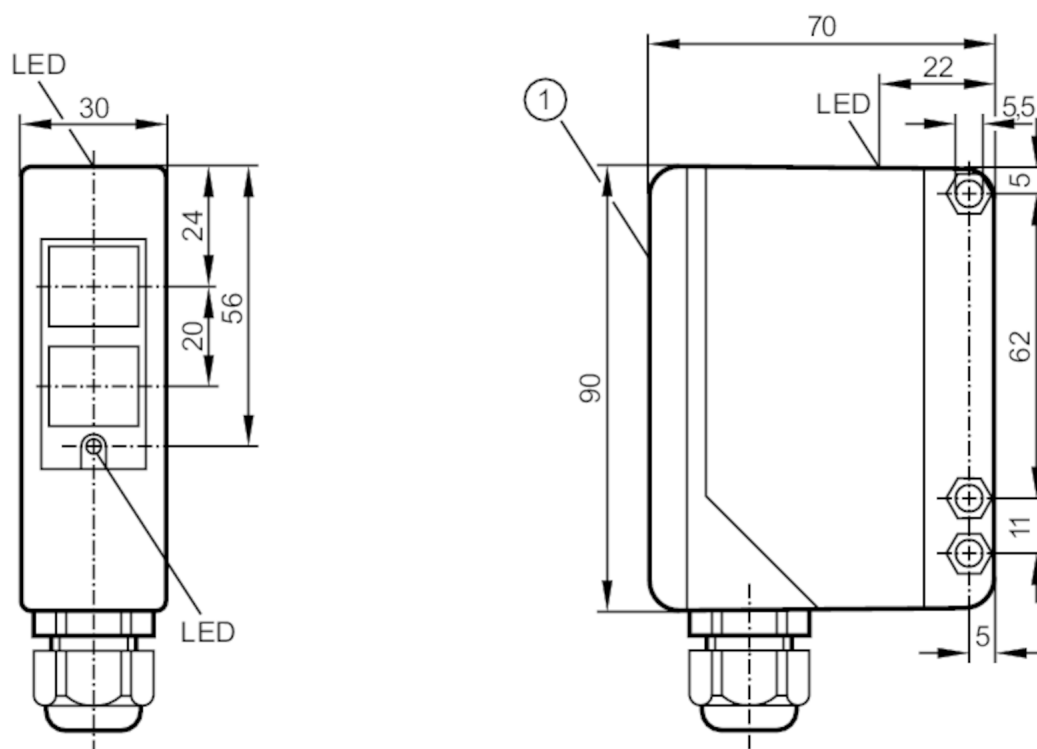

Application

Function principle	Through-beam sensor
--------------------	---------------------

Electrical data

Frequency AC	[Hz]	47...63
Operating voltage	[V]	20...250 AC/DC
Max. power consumption	[VA]	3.5
Protection class		II
Type of light		infrared light
Wave length	[nm]	880

Outputs

Short-circuit protection	no
Overload protection	no

Detection zone

Transmitter / receiver	transmitter
Range [m]	< 50
Range adjustable	no
Max. light spot diameter [mm]	1500
Light spot dimensions refer to	at maximum range

OA0122



Through-beam sensor transmitter

OAS-000A/O.MONTZU

Operating conditions		
Ambient temperature	[°C]	-25...60
Protection		IP 65
Tests / approvals		
EMC	EN 60947-5-2	
	EN 55011	class B
MTTF	[years]	393
Mechanical data		
Weight	[g]	142.2
Housing		rectangular
Dimensions	[mm]	90 x 30 x 70
Materials		PPO modified
Lens material		PMMA
Lens alignment		side lens
Displays / operating elements		
Display	operation	1 x LED, green
Accessories		
Accessories (supplied)	Angle bracket: 1 x, E20514	
	screwdrivers	
Remarks		
Pack quantity		1 pcs.
Electrical connection		
terminals: ...1.5 mm²; Cable sheath: Ø 4.5...10 mm; Cable gland: M16 X 1.5		
Connection		

