




Through-beam sensor receiver

OGE-HNKG/US

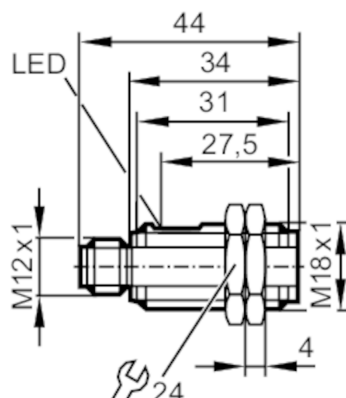

Application

Function principle	Through-beam sensor
--------------------	---------------------

Electrical data

Operating voltage [V]	10...30 DC
Current consumption [mA]	8
Protection class	III
Reverse polarity protection	yes
Type of light	red light

Outputs

Electrical design	NPN
Output function	light-on mode
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	200
Switching frequency DC [Hz]	1000
Short-circuit protection	yes
Overload protection	yes

Detection zone

Transmitter / receiver	receiver
Range [m]	< 8
Range adjustable	no

Operating conditions

Ambient temperature [°C]	-25...60
Protection	IP 67; (in conjunction with a corresponding connector)

Tests / approvals

EMC	EN 60947-5-2
MTTF [years]	1320



Through-beam sensor receiver

OGE-HNKG/US

Mechanical data		
Weight	[g]	14.5
Housing		threaded type
Dimensions	[mm]	M18 x 1 / L = 44
Thread designation		M18 x 1
Materials		housing: ABS
Lens material		PMMA
Displays / operating elements		
Display	switching status	1 x LED, yellow
Accessories		
Accessories (supplied)		lock nuts: 2 x
Remarks		
Pack quantity		1 pcs.

Electrical connection

Connector: 1 x M12



Connection

