


OGP200



Retro-reflective sensor

OGP-DPKG/US100

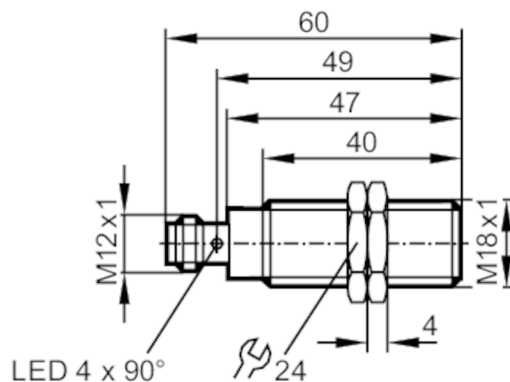

Application

Function principle	Retro-reflective sensor
--------------------	-------------------------

Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	15
Protection class		II
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	624

Outputs

Electrical design		PNP
Output function		dark-on mode
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	1000
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

Detection zone

Range referred to prismatic reflector	[m]	0.03...4; (Prismatic reflector Ø 80 E20005)
Range adjustable		no
Max. light spot diameter	[mm]	160
Light spot dimensions refer to		at maximum range
Polarisation filter available		yes

Operating conditions

Ambient temperature	[°C]	-25...60
Protection		IP 67

OGP200



Retro-reflective sensor


OGP-DPKG/US100

Tests / approvals		
EMC	EN 60947-5-2	
MTTF	[years]	509
Mechanical data		
Weight	[g]	50
Housing	threaded type	
Dimensions	[mm]	M18 x 1 / L = 60
Thread designation	M18 x 1	
Materials	housing: stainless steel (1.4404 / 316L)	
Lens material	PMMA	
Displays / operating elements		
Display	switching status	1 x LED, yellow
Accessories		
Accessories (supplied)	lock nuts: 2 x	
Remarks		
Remarks	operating voltage "supply class 2" according to cULus	
Pack quantity	1 pcs.	
Electrical connection		

Connector: 1 x M12



Connection

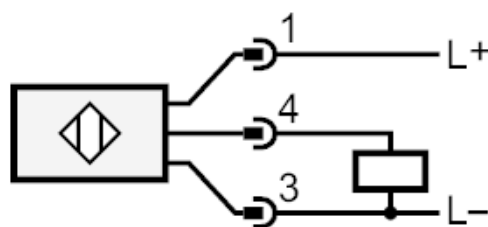



Retro-reflective sensor

OGP-DPKG/US100

Diagrams and graphs

excess gain graph

