


OGS700



Through-beam laser sensor transmitter

OGSLOOKG/US100

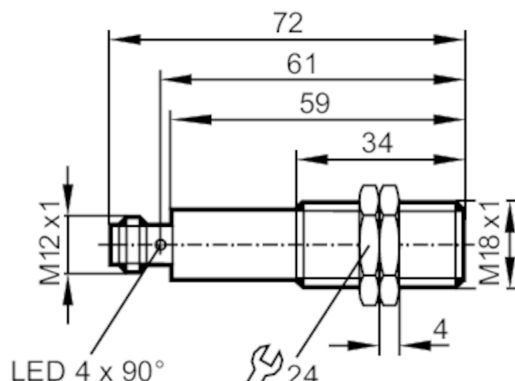

Application

Function principle	Through-beam sensor
--------------------	---------------------

Electrical data

Operating voltage [V]	10...36 DC
Current consumption [mA]	13
Protection class	II
Reverse polarity protection	yes
Type of light	red light
Wave length [nm]	655
Typ. lifetime [h]	50000

Detection zone

Transmitter / receiver	transmitter
Range [m]	< 60
Range adjustable	no
Diameter of the smallest detectable object [mm]	3; (60 m)
Max. light spot diameter [mm]	312
Light spot dimensions refer to	at maximum range

Operating conditions

Ambient temperature [°C]	-10...60
Protection	IP 65; IP 67

Tests / approvals

EMC	EN 60947-5-2
Laser protection class	1; (IEC 60825-1 : 2007; Complies with 21 CFR 1040 except for deviations pursuant to Laser Notice No. 50, dated June 2007.)
MTTF [years]	1018

OGS700



Through-beam laser sensor transmitter

OGSLOOKG/US100

Mechanical data		
Weight	[g]	64
Housing		threaded type
Dimensions	[mm]	M18 x 1 / L = 72
Thread designation		M18 x 1
Materials		stainless steel (1.4404 / 316L); PA; EPDM
Lens material		PMMA

Displays / operating elements		
Display	operation	1 x LED, green

Accessories	
Accessories (supplied)	lock nuts: 2 x

Remarks	
Remarks	operating voltage "supply class 2" according to cULus
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12



Connection

