




Diffuse reflection sensor

OGT-DPKG/US

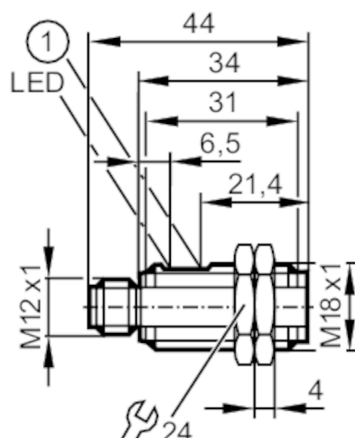

- 1 potentiometer
receiver in upper lens
transmitter in lower lens



Application

Function principle	Diffuse reflection sensor
--------------------	---------------------------

Electrical data

Operating voltage [V]	10...30 DC
Current consumption [mA]	20
Protection class	III
Reverse polarity protection	yes
Type of light	red light
Wave length [nm]	645

Outputs

Electrical design	PNP
Output function	dark-on mode
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	200
Switching frequency DC [Hz]	1000
Short-circuit protection	yes
Overload protection	yes

Detection zone

Range [mm]	10...400; (white paper 200 x 200 mm 90 % remission)
Range adjustable	yes
Max. light spot diameter [mm]	25
Light spot dimensions refer to	at maximum range
Monitoring range final value [mm]	70...400

Operating conditions

Ambient temperature [°C]	-25...60
Protection	IP 65; (in conjunction with a corresponding connector)



Diffuse reflection sensor

OGT-DPKG/US

Tests / approvals		
EMC	EN 60947-5-2	
MTTF	[years]	901
Mechanical data		
Weight	[g]	16
Housing	threaded type	
Dimensions	[mm]	M18 x 1 / L = 44
Thread designation	M18 x 1	
Materials	housing: ABS	
Lens material	PMMA	
Displays / operating elements		
Display	switching status	1 x LED, yellow
Operating elements	potentiometer	
Accessories		
Accessories (supplied)	lock nuts: 2 x	
Remarks		
Pack quantity	1 pcs.	
Electrical connection		

Connector: 1 x M12



Connection

