


Retro-reflective sensor

OHP-DPKG/2M

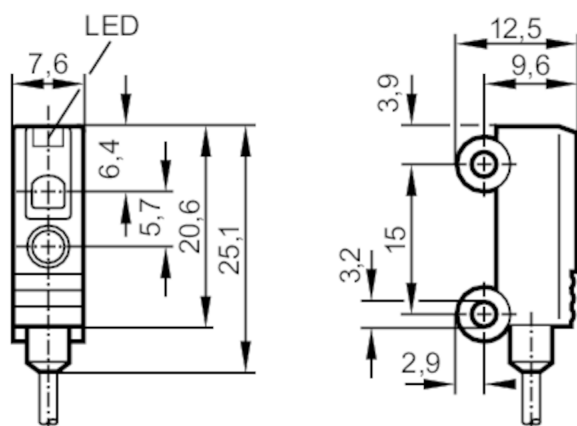

Application

Function principle

Retro-reflective sensor

Electrical data

Operating voltage	[V]	10...30 DC
Current consumption	[mA]	< 20
Protection class		III
Reverse polarity protection		yes
Type of light		red light
Typ. lifetime	[h]	75000
Reference temperature for service life	[°C]	25

Outputs

Electrical design		PNP
Output function		dark-on mode
Permanent current rating of switching output DC	[mA]	50
Switching frequency DC	[Hz]	800
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

Detection zone

Range referred to prismatic reflector	[m]	0.8; (Prismatic reflector Ø 35 E20004)
Range adjustable		no
Max. light spot diameter	[mm]	10
Light spot dimensions refer to		Range
Polarisation filter available		yes

Response times

Response time	[s]	< 0.6
---------------	-----	-------


OH5010



Retro-reflective sensor

OHP-DPKG/2M

Operating conditions		
Ambient temperature	[°C]	-20...50
Protection		IP 67
Tests / approvals		
EMC	EN 60947-5-2	
Mechanical data		
Weight	[g]	28.2
Housing		rectangular
Dimensions	[mm]	20.6 x 7.6 x 12.5
Materials		ABS
Lens material		PMMA
Lens alignment		side lens
Displays / operating elements		
Display	switching status	1 x LED, yellow
	unsafe zone	1 x LED, yellow flashing light
Remarks		
Pack quantity		1 pcs.
Electrical connection		
Cable: 2 m, PVC; 3 x 0.09 mm ²		
Connection		

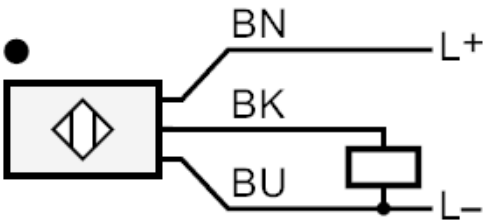

	Core colours :
BK =	black
BN =	brown
BU =	blue