




Through-beam sensor receiver

OHE-DPKG/0,20M/AS

Status Archive

/O8E202

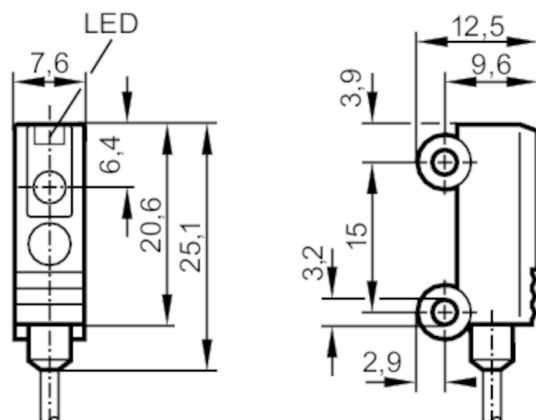

Application

Function principle

Through-beam sensor

Electrical data

Operating voltage	[V]	10...30 DC
Current consumption	[mA]	< 10
Protection class		III
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	660

Outputs

Electrical design		PNP
Output function		dark-on mode
Permanent current rating of switching output DC	[mA]	50
Switching frequency DC	[Hz]	200
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

Detection zone

Transmitter / receiver		receiver
Range	[m]	< 1.2
Range adjustable		no

Response times

Response time	[s]	< 2.5
---------------	-----	-------

Operating conditions

Ambient temperature	[°C]	-20...50
Protection		IP 67

OH5015



Through-beam sensor receiver

OHE-DPKG/0,20M/AS

Tests / approvals

EMC	EN 60947-5-2
-----	--------------

Mechanical data

Weight	[g]	14.8
Housing		rectangular
Dimensions	[mm]	25.1 x 7.6 x 12.5
Materials		ABS
Lens material		PMMA
Lens alignment		side lens

Displays / operating elements

Display	switching status	1 x LED, yellow
	unsafe zone	1 x LED, yellow flashing light

Remarks

Pack quantity	1 pcs.
---------------	--------


Electrical connection

Cable: 0.2 m, PVC

Connector: 1 x M8



Connection

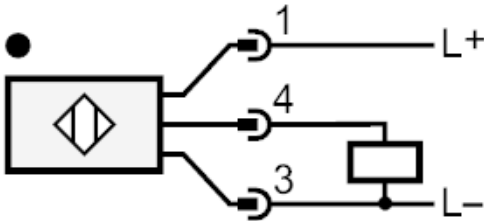

Status Archive

/O8E202