




Retro-reflective sensor

OHP-DPKG/0,20M/AS

Status Archive

/O8P202

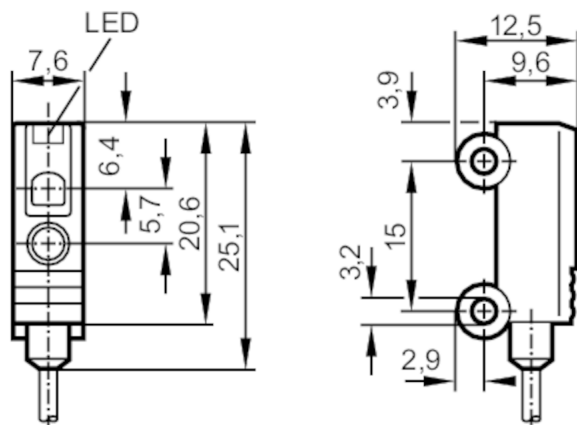

Application

Function principle

Retro-reflective sensor

Electrical data

Operating voltage	[V]	10...30 DC
Current consumption	[mA]	< 20
Protection class		III
Reverse polarity protection		yes
Type of light		red light
Typ. lifetime	[h]	75000
Reference temperature for service life	[°C]	25

Outputs

Electrical design		PNP
Output function		dark-on mode
Permanent current rating of switching output DC	[mA]	50
Switching frequency DC	[Hz]	800
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

Detection zone

Range referred to prismatic reflector	[m]	0.8; (Prismatic reflector Ø 35 E20004)
Range adjustable		no
Max. light spot diameter	[mm]	10
Light spot dimensions refer to		Range
Polarisation filter available		yes




Retro-reflective sensor

OHP-DPKG/0,20M/AS

Response times		
Response time	[s]	< 0.6
Operating conditions		
Ambient temperature	[°C]	-20...50
Protection		IP 67
Tests / approvals		
EMC	EN 60947-5-2	
Mechanical data		
Weight	[g]	14
Housing		rectangular
Dimensions	[mm]	20.6 x 7.6 x 12.5
Materials		ABS
Lens material		PMMA
Lens alignment		side lens
Displays / operating elements		
Display	switching status	1 x LED, yellow
	unsafe zone	1 x LED, yellow flashing light
Remarks		
Pack quantity		1 pcs.
Electrical connection		
Cable: 0.2 m, PVC		
Connector: 1 x M8		
		

Connection

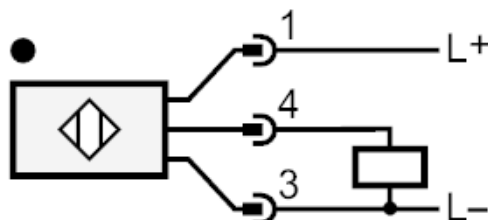

OH5019

Retro-reflective sensor

OHP-DPKG/0,20M/AS



Status Archive

/O8P202