




- 1 potentiometer sensitivity
2 output function switch

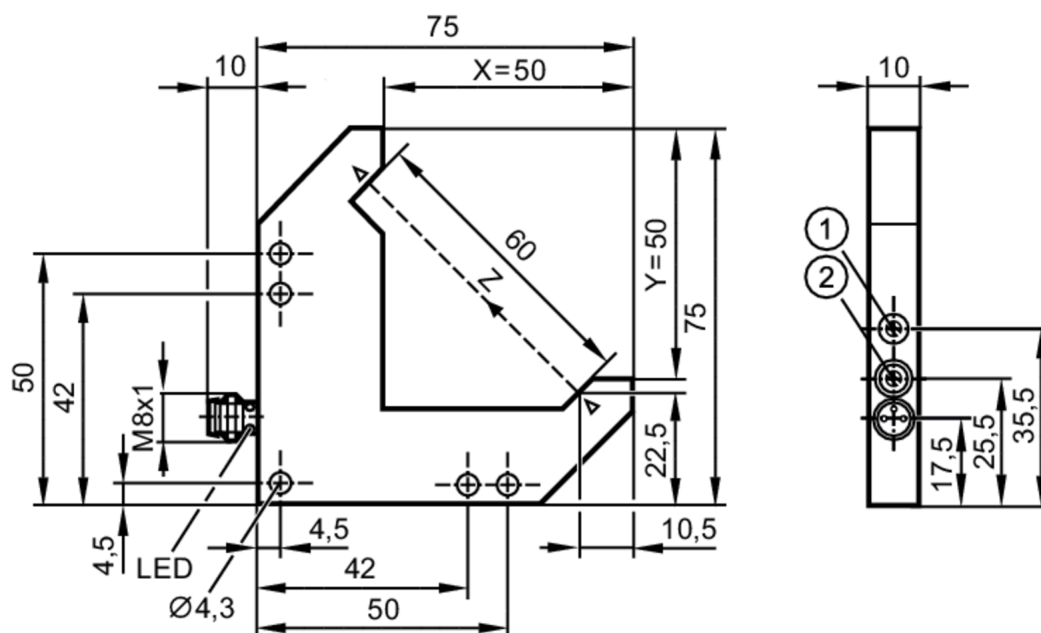

Electrical data		
Operating voltage	[V]	10...35 DC
Current consumption	[mA]	< 30
Protection class		III
Reverse polarity protection		yes
Type of light		red light
Outputs		
Electrical design		PNP
Output function		light-on/dark-on mode; (selectable)
Max. voltage drop switching output DC	[V]	2.8
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	4000
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes
Detection zone		
Diameter of the smallest detectable object	[mm]	0.5
Operating conditions		
Ambient temperature	[°C]	-25...60
Protection		IP 67

OPL200



Optical angle sensor

OPL-FPKG/AS

Tests / approvals

EMC		EN 60947-5-2	
MTTF	[years]		572

Mechanical data

Weight	[g]	115
Dimensions	[mm]	75 x 10 x 75
Side length X	[mm]	50
Side length Y	[mm]	50
Sensor width Z	[mm]	60
Materials		housing: diecast zinc black anodised; lens: glass

Displays / operating elements


Display	switching status	1 x LED, yellow
---------	------------------	-----------------

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Connector: 1 x M8



Connection

