




Diffuse reflection sensor

OST-FBOA

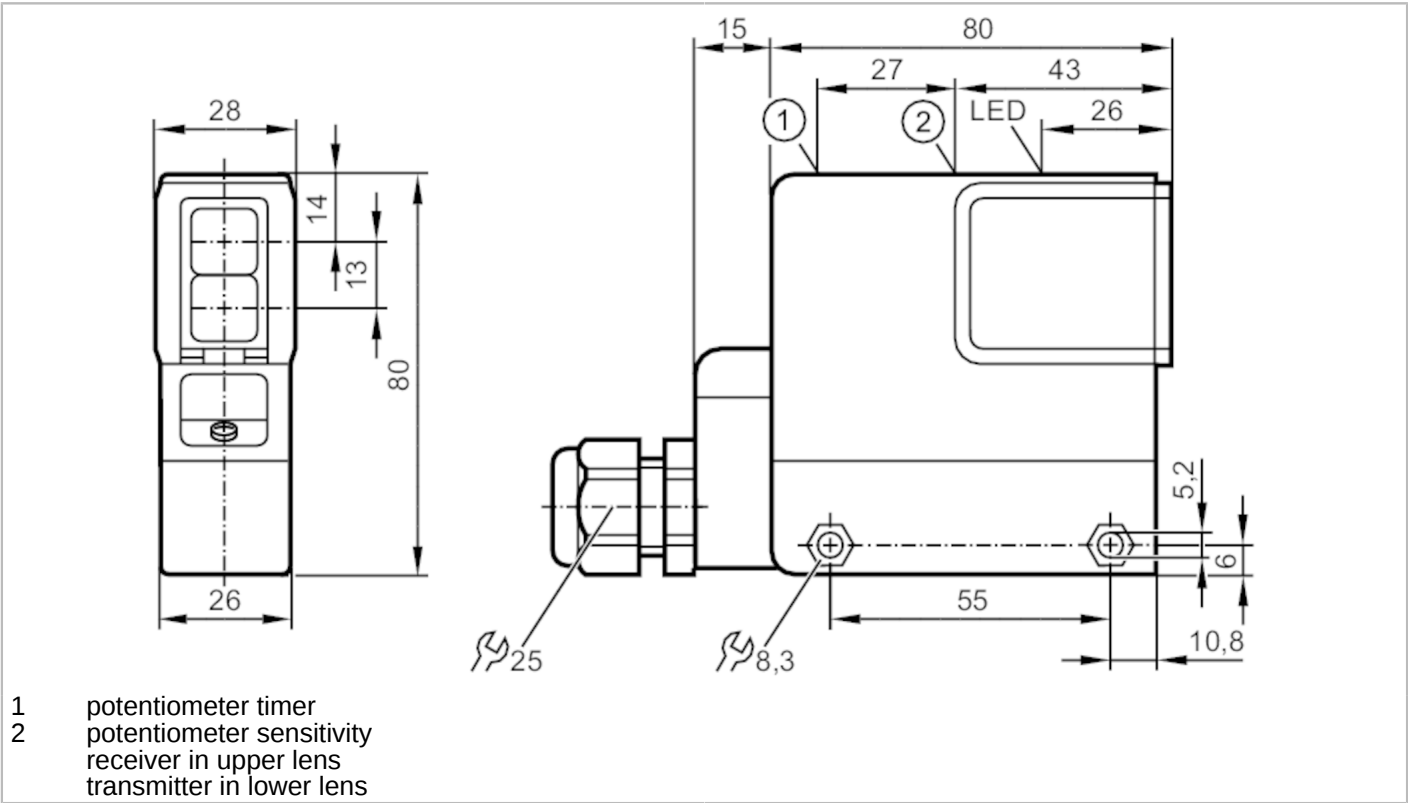

Application	
Function principle	Diffuse reflection sensor
Electrical data	
Operating voltage [V]	20...250 AC/DC
Protection class	II
Reverse polarity protection	no
Type of light	infrared light
Wave length [nm]	880



Diffuse reflection sensor

OST-FBOA

Outputs		
Output function		light-on/dark-on mode; (programmable)
Max. voltage drop switching output DC	[V]	10.5
Max. voltage drop switching output AC	[V]	10.5
Minimum load current	[mA]	15
Max. leakage current	[mA]	6
Permanent current rating of switching output AC	[mA]	250; (350 (...50 °C))
Permanent current rating of switching output DC	[mA]	250; (350 (...50 °C))
Short-time current rating of switching output	[mA]	2200; (10 ms / 0,5 Hz)
Switching frequency AC	[Hz]	25
Switching frequency DC	[Hz]	25
Short-circuit proof		no
Overload protection		no
Detection zone		
Range	[mm]	< 1000; (white paper 200 x 200 mm)
Range adjustable		yes
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 65
Tests / approvals		
EMC	EN 60947-5-2	class B
	EN 55011	
MTTF	[years]	302
Mechanical data		
Weight	[g]	267.8
Housing		rectangular
Dimensions	[mm]	80 x 28 x 95
Materials		PPO modified
Lens material		glass
Lens alignment		side lens
Displays / operating elements		
Display	switching status	1 x LED, yellow
Electrical connection		
Required protection	miniature fuse to IEC60127-2 sheet 1; ≤ 2 A; fast acting	
Accessories		
Accessories (supplied)	Angle bracket: 1 x, E20210	
	screwdrivers	
Remarks		
Remarks	Recommendation: Check the safe functioning of the unit after a short circuit.	
Pack quantity	1 pcs.	




Diffuse reflection sensor

OST-FBOA

Electrical connection

terminals: ...1.5 mm²; Cable gland: M20 X 1.5

Connection

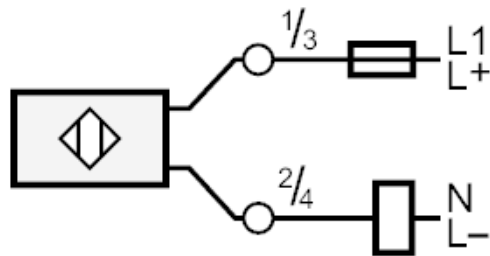

Note : miniature fuse to IEC60127-2 sheet 1 $\leq$ 2 A fast acting