


OY951S

safety light grids

OYA0510-02-4-60-P-1

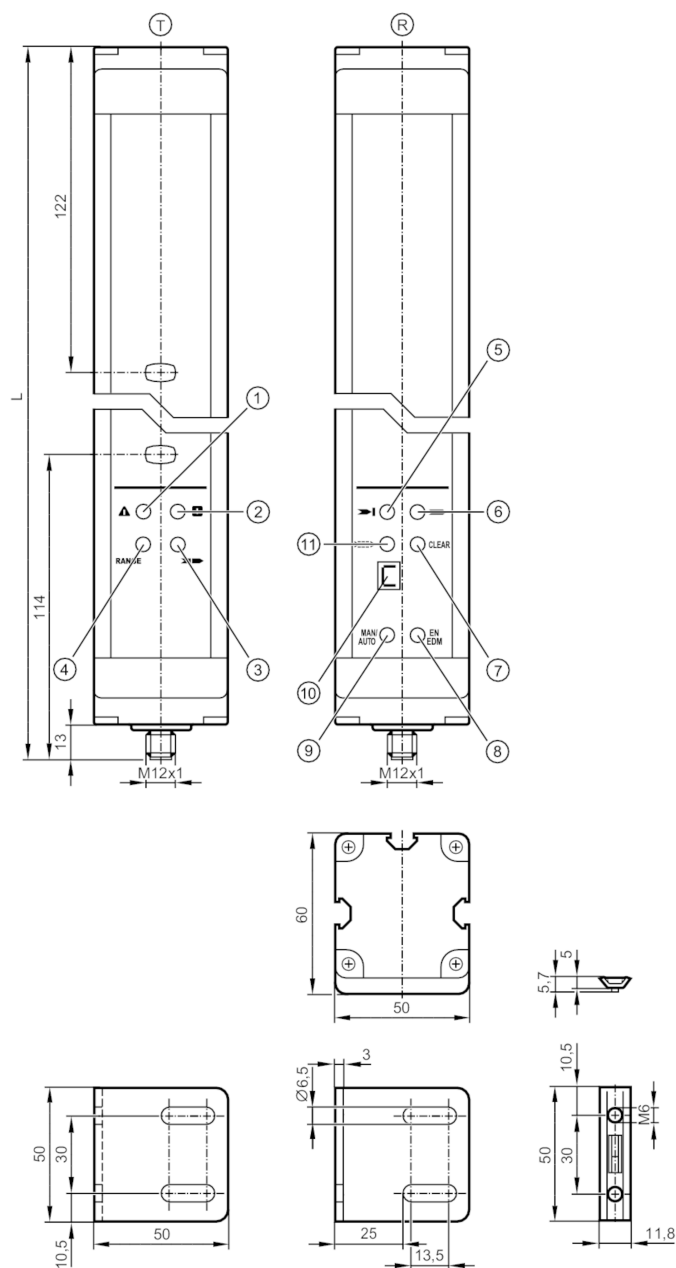

- T transmitter
- R receiver
- 1 LED red
- 2 LED green
- 3 LED yellow
- 4 LED orange
- 5 LED red
- 6 LED green
- 7 LED yellow
- 8 LED yellow
- 9 LED yellow
- 10 display
- 11 LED orange



Application

Protective function

access prevention body protection



safety light grids

OYA0510-02-4-60-P-1

Electrical data		
Operating voltage tolerance	[%]	20
Operating voltage	[V]	24 DC
Protection class		III
Reverse polarity protection		yes
Power-on delay time	[s]	< 10
Type of light		infrared light
Wave length	[nm]	950
receiver		
Current consumption	[mA]	250
transmitter		
Current consumption	[mA]	125
Outputs		
Electrical design		PNP
Number of OSSD outputs		2
Max. current load per OSSD output	[mA]	500; (24 V)
Short-circuit protection		yes
Detection zone		
Protected area height	[mm]	510
Number of beams		2
Protection area width (low light intensity)	[m]	8...30
Protection area width (high light intensity)	[m]	18...60
Response times		
Response time	[ms]	7
Operating conditions		
Applications		class C to EN 60654-1 weatherproof application
Ambient temperature	[°C]	-10...55
Max. relative air humidity	[%]	95
Protection		IP 65
Tests / approvals		
EMC	IEC 61496-1	
Shock resistance	IEC 61496-1	
Vibration resistance	IEC 61496-1	
Safety classification		
ISO 13849-1		category: 4, PL: e
IEC 61508		SIL 3
IEC 62061		SILCL 3
Mission time TM	[h]	175200
Safety-related reliability PFHD	[1/h]	7.5E-09

OY951S




safety light grids

OYA0510-02-4-60-P-1


Mechanical data		
Weight	[g]	5150
Dimensions	[mm]	736 x 50 x 60
Materials		housing: aluminium; front lens: PC
Length L	[mm]	736
Displays / operating elements		
Display	transmitter	4 LED
	receiver	6 LED
	receiver	1 LC display
Accessories		
Accessories (supplied)	mounting bracket: 4	
	slot nuts: 4	
Remarks		
Notes	For 8-pole sockets the core colours are not standardised.; Please note the wiring of the sensor and the sockets (see data sheet).	
Pack quantity	1 pcs.	
Electrical connection - receiver		
Connector: 1 x M12; Maximum cable length: 100 m; for wire cross-section 1 mm²		
		

Connection

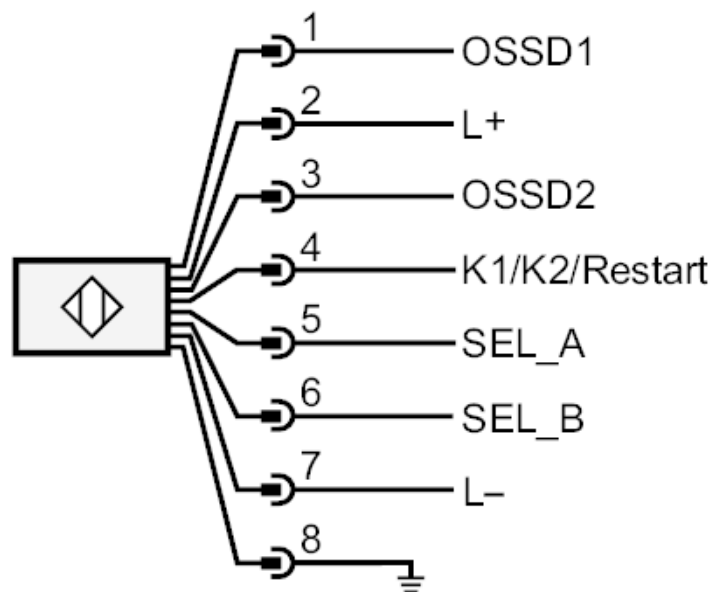

Electrical connection - transmitter

Connector: 1 x M12



OY951S

safety light grids

OYA0510-02-4-60-P-1



Connection

