


PA6229



Pressure transmitter with ceramic measuring cell

PA-0-1-RBN14-A-ZVG/US/ IV

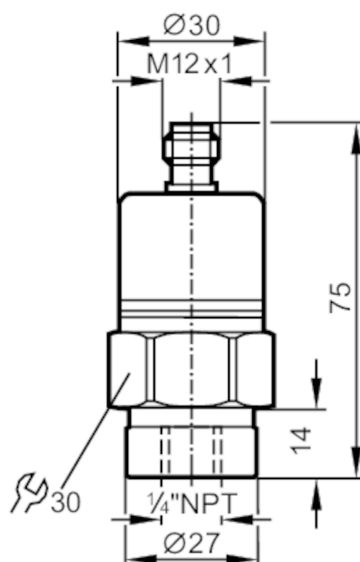

Application

Media	liquids and gases
Medium temperature [°C]	-25...90; (on request: -40...90 °C)
Pressure rating [bar]	10
Min. bursting pressure [bar]	30
Type of pressure	relative pressure

Electrical data

Operating voltage [V]	9.6...32 DC
Min. insulation resistance [MΩ]	100; (500 V DC)
Protection class	III
Reverse polarity protection	yes

Outputs

Total number of outputs	1
Output signal	analogue signal
Number of analogue outputs	1
Analogue current output [mA]	20...4
Max. load [Ω]	720; (U _b = 24 V; (U _b - 9,6 V) / 20 mA)
Overload protection	yes

Measuring/setting range

Measuring range [bar]	-1...0
-----------------------	--------

Accuracy / deviations

Repeatability [% of the span]	< 0,1; (with temperature fluctuations < 10 K)
Characteristics deviation	< ± 0,25 (BFSL) / < ± 0,5 (LS); (BFSL = Best Fit Straight Line; LS = limit value setting)



Pressure transmitter with ceramic measuring cell

PA-0-1-RBN14-A-ZVG/US/ IV

	[% of the span]	
Long-term stability		< ± 0,05; (per 6 months)
	[% of the span]	
Temperature coefficient zero point		0,1; (0...80 °C)
	[% of the span / 10 K]	
Temperature coefficient span		0,2; (0...80 °C)
	[% of the span / 10 K]	

Response times

Step response time analogue output	[ms]	3
------------------------------------	------	---

Operating conditions

Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-40...100
Protection		IP 65

Tests / approvals

EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	30 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	10 V
	radiation of interference	according to the automotive directive 2004/104/EC / CISPR 25
	noise immunity	according to the automotive directive 2004/104/EC / ISO 11452-2
	HF radiated	100 V/m
	pulse resistance	ISO 7637-2 / severity level 3
Shock resistance	DIN IEC 68-2-27	50 g (11 ms)
Vibration resistance	DIN IEC 68-2-6	20 g (10...2000 Hz)
MTTF	[years]	506

Mechanical data

Weight	[g]	220.4
Materials		stainless steel (1.4404 / 316L); FKM; PA; EPDM/X
Materials (wetted parts)		stainless steel (1.4305 / 303); ceramics; FKM
Min. pressure cycles		100 million
Process connection		threaded connection 1/4 NPT internal thread

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Connector: 1 x M12; Contacts: gold-plated



PA6229



Pressure transmitter with ceramic measuring cell

PA-0-1-RBN14-A-ZVG/US/ /V

Connection

