


PG2454



Pressure sensor with analogue display

PG-010-REB12-MFRKG/US/ /P

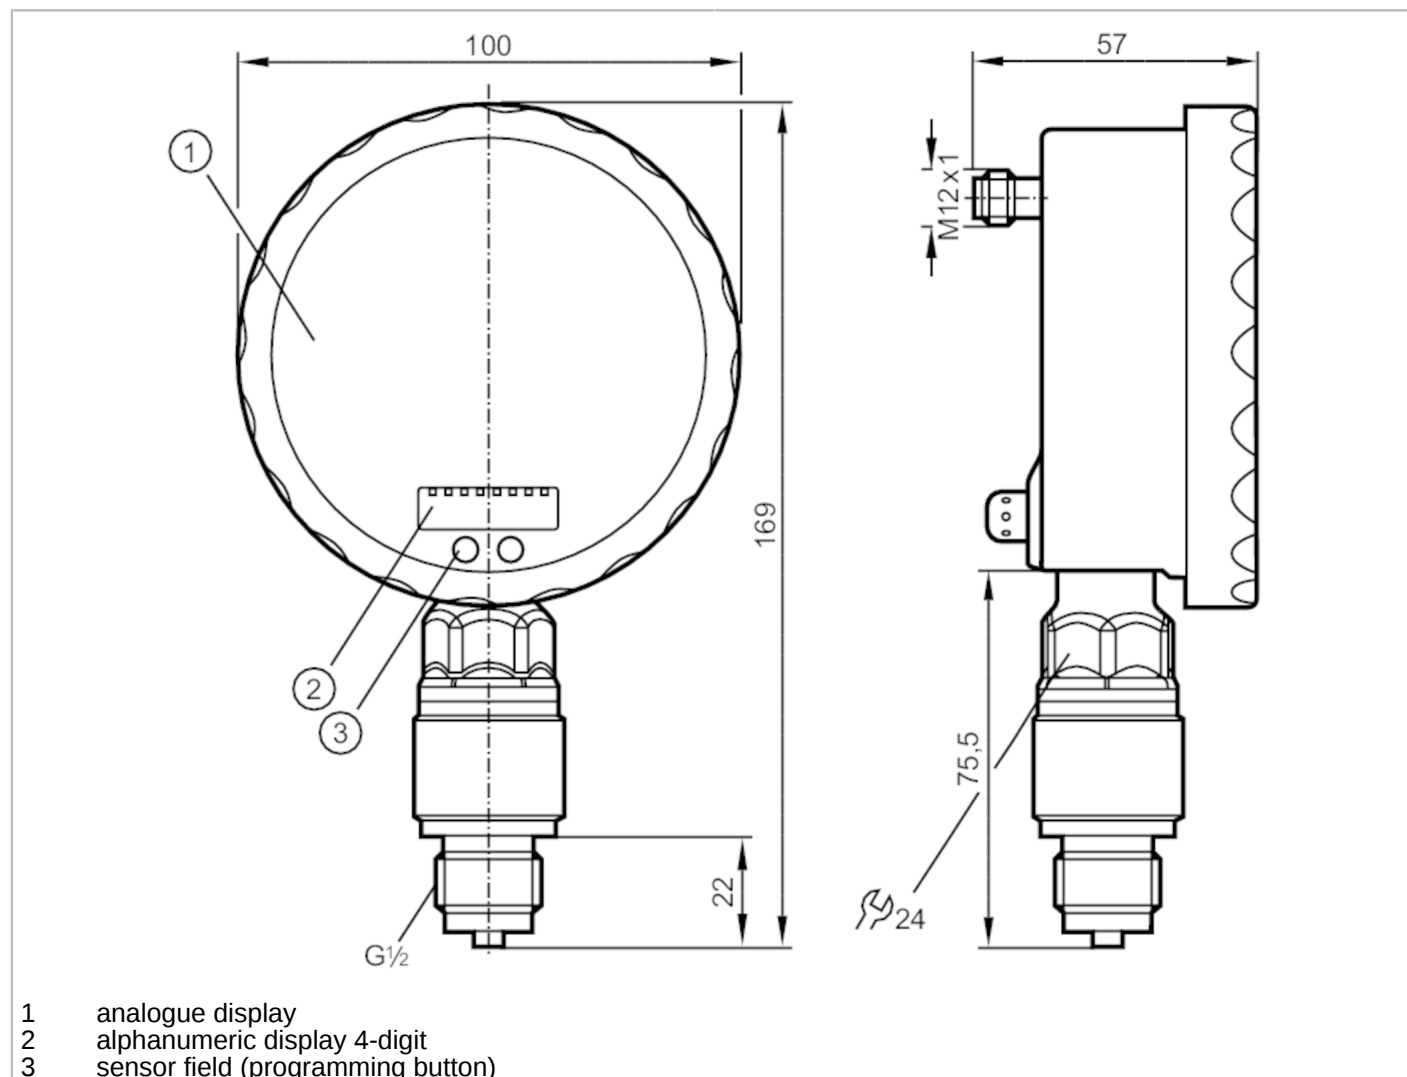

Application		
Application	for industrial applications	
Media	liquids and gases	
Medium temperature [°C]	-25...80	
Pressure rating	50 bar	725 psi
Min. bursting pressure	150 bar	2175 psi
Type of pressure	relative pressure	
MAWP (for applications according to CRN)	38 bar	551 psi



Pressure sensor with analogue display

PG-010-REB12-MFRKG/US/ /P

Electrical data		
Operating voltage	[V]	18...32 DC
Current consumption	[mA]	< 70; (24 V)
Min. insulation resistance	[MΩ]	100; (500 V DC)
Protection class		III
Reverse polarity protection		yes
Power-on delay time	[s]	6
Integrated watchdog		yes
Inputs / outputs		
Number of inputs and outputs		Number of digital outputs: 1; Number of analogue outputs: 1
Outputs		
Total number of outputs		2
Output signal		switching signal; analogue signal; (configurable)
Electrical design		PNP/NPN
Number of digital outputs		1
Output function		normally open / normally closed; (parameterisable)
Max. voltage drop switching output DC	[V]	2
Permanent current rating of switching output DC	[mA]	250
Switching frequency DC	[Hz]	75
Number of analogue outputs		1
Analogue current output	[mA]	4...20, invertible; (scalable)
Max. load	[Ω]	(U _b - 10 V) / 20 mA
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes
Measuring/setting range		
Measuring range	-1...10 bar	-14.4...145 psi
Set point SP	-0.96...16 bar	-14...232 psi
Reset point rP	-1...15.96 bar	-14.4...231.6 psi
Analogue start point	-1...13.5 bar	-14.4...195.8 psi
Analogue end point	1.5...16 bar	21.8...232 psi
In steps of	0.02 bar	0.2 psi
Accuracy / deviations		
Switch point accuracy	[% of the span]	< ± 0,5; (Turn down 1:1)
Repeatability		
Characteristics deviation	[% of the span]	< ± 0,25 (BFSL) / < ± 0,5 (LS); (Turn down 1:1; BFSL = Best Fit Straight Line)
Hysteresis deviation		
Long-term stability		< ± 0,1; (Turn down 1:1; per 6 months)



Pressure sensor with analogue display

PG-010-REB12-MFRKG/US/ /P

	[% of the span]	
Temperature coefficient zero point		$< \pm 0,2; (0...70\text{ °C})$
	[% of the span / 10 K]	
Temperature coefficient span		$< \pm 0,2; (0...70\text{ °C})$
	[% of the span / 10 K]	

Response times		
Response time	[ms]	< 9
Damping for the switching output dAP	[s]	0.01...30
Damping for the analogue output dAA	[s]	0.01...30
Step response time analogue output	[ms]	28

Operating conditions		
Ambient temperature	[°C]	-20...80
Storage temperature	[°C]	-40...100
Protection		IP 67; IP 69K

Tests / approvals		
EMC	DIN EN 61000-6-2	
	DIN EN 61000-6-3	
Shock resistance	DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF	[years]	103
Pressure Equipment Directive	Sound Engineering Practice; can be used for group 2 fluids; group 1 fluids on request	

Mechanical data		
Weight	[g]	617
Materials	stainless steel (1.4404 / 316L); PA; FKM; PTFE; viewing glass: laminated safety glass 4 mm	
Materials (wetted parts)	Al2O3 (ceramics); FKM; stainless steel (1.4404 / 316L)	
Min. pressure cycles	100 million	
Process connection	threaded connection G 1/2 external thread	

Displays / operating elements		
Display	Display unit	2 x LED, green
	switching status	LED, yellow
	switch points	LED ring
	function display	alphanumeric display, 4-digit
	measured values	analogue display, 0...350° rotatable, pointer not visible when unit disconnected
	measured values	alphanumeric display, 4-digit
With scale	yes	
Extended display range (max.)	16 bar	232 psi

Remarks		
Remarks	switch point accuracy in the extended display range: 1.5 % of the span	
Pack quantity	1 pcs.	

Electrical connection		
Connector: 1 x M12; Contacts: gold-plated		

PG2454





Pressure sensor with analogue display

PG-010-REB12-MFRKG/US/ /P



Connection

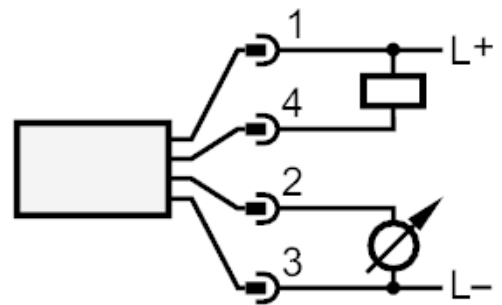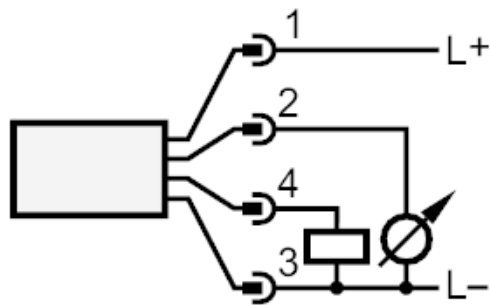

OUT1	switching output
OUT2	analogue output