




Flush pressure sensor with display

PI-2,5-REA01-MFRKG/US/ /P

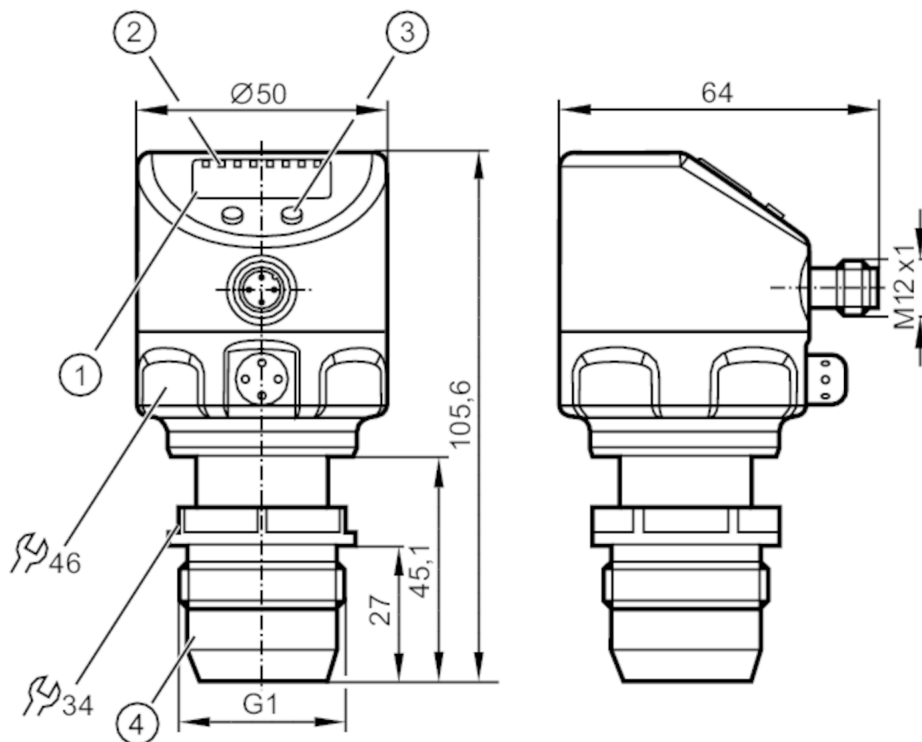

- 1 alphanumeric display 4-digit
- 2 status LEDs
- 3 programming button
- 4 G 1 sealing cone external thread

Attention: The unit must only be installed in a process connection for G1 sealing cone. The G1A sealing cone of the unit is only suited for adapters with metal end stop.

ACS EC 1935/2004 EHEDG Certified

Application

Application	hygienic systems	
Media	viscous media and liquids with suspended particles; liquids and gases	
Medium temperature [°C]	-25...125; (145 max. 1h)	
Pressure rating	20 bar	290 psi
Min. bursting pressure	50 bar	725 psi
Type of pressure	relative pressure	

Electrical data

Min. insulation resistance [MΩ]	100; (500 V DC)
Protection class	III
Reverse polarity protection	yes
Integrated watchdog	yes

2-wire

Operating voltage [V]	20...32 DC
Current consumption [mA]	3.6...21
Power-on delay time [s]	1



Flush pressure sensor with display

PI-2,5-REA01-MFRKG/US/ /P

3-wire			
Operating voltage	[V]	18...32 DC	
Current consumption	[mA]	< 45	
Power-on delay time	[s]	0.5	
Inputs / outputs			
Number of inputs and outputs		Number of digital outputs: 2; Number of analogue outputs: 1	
Outputs			
Total number of outputs		2	
Output signal		switching signal; analogue signal; IO-Link; (configurable)	
Electrical design		PNP/NPN	
Number of digital outputs		2	
Output function		normally open / normally closed; (parameterisable)	
Number of analogue outputs		1	
Analogue current output	[mA]	4...20, invertible; (scalable)	
Short-circuit protection		yes	
Type of short-circuit protection		pulsed	
Overload protection		yes	
2-wire			
Max. load	[Ω]	300	
3-wire			
Max. voltage drop switching output DC	[V]	2	
Permanent current rating of switching output DC	[mA]	250	
Switching frequency DC	[Hz]	125	
Max. load	[Ω]	(U _b - 10 V) / 20 mA	
Measuring/setting range			
Measuring range		-0.124...2.5 bar	-1.8...36.27 psi
Set point SP		-0.12...2.5 bar	-1.74...36.27 psi
Reset point rP		-0.124...2.496 bar	-1.8...36.21 psi
Analogue start point		-0.124...1.88 bar	-1.8...27.27 psi
Analogue end point		0.5...2.5 bar	7.26...36.27 psi
In steps of		0.002 bar	0.03 psi
Factory setting		SP1 = 0.624 bar	rP1 = 0.574 bar
		SP2 = 1.874 bar	rP2 = 1.824 bar
		ASP = 0.000 bar	AEP = 2.500 bar
Accuracy / deviations			
Switch point accuracy		< ± 0,2; (Turn down 1:1)	
[% of the span]			
Repeatability		< ± 0,1; (with temperature fluctuations < 10 K; Turn down 1:1)	
[% of the span]			
Characteristics deviation		< ± 0,2; (Turn down 1:1 linearity, incl. hysteresis and repeatability limit value setting to DIN 16086)	
[% of the span]			
Linearity deviation		< ± 0,15; (Turn down 1:1)	
[% of the span]			
Hysteresis deviation		< ± 0,15; (Turn down 1:1)	



Flush pressure sensor with display

PI-2,5-REA01-MFRKG/US/ /P

[% of the span]		
Long-term stability		< ± 0,1; (Turn down 1:1; per year)
	[% of the span]	
Temperature coefficient zero point		< ± 0,05; (0...70 °C)
	[% of the span / 10 K]	
Temperature coefficient span		< ± 0,15; (0...70 °C)
	[% of the span / 10 K]	
Response times		
Damping for the switching output dAP	[s]	0...30
Damping for the analogue output dAA	[s]	0.01...99.99
2-wire		
Step response time analogue output	[ms]	45
3-wire		
Min. response time of switching output (dAP)	[ms]	3
Step response time analogue output	[ms]	7
Interfaces		
Communication interface		IO-Link
Transmission type		COM2 (38,4 kBaud)
IO-Link revision		1.0
IO-Link device ID		159 d / 00 00 9F h
Profiles		no profile
SIO mode		yes
Required master port type		A
Process data analogue		1
Process data binary		2
Min. process cycle time	[ms]	2.3
Operating conditions		
Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-40...100
Protection		IP 67; IP 68; IP 69K
Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-5 Surge	0,5/1 kV
	EN 61000-4-6 HF conducted	10 V
Shock resistance	DIN IEC 68-2-27	50 g (11 ms)
Vibration resistance	DIN IEC 68-2-6	20 g (10...2000 Hz)
MTTF	[years]	148.85



Flush pressure sensor with display

PI-2,5-REA01-MFRKG/US/ /P




Mechanical data		
Weight	[g]	340.2
Materials	stainless steel (1.4404 / 316L); FKM; PTFE; PBT; PEI; PFA	
Materials (wetted parts)	ceramics (99.9 % Al2O3); PTFE; stainless steel (1.4435 / 316L); surface characteristics: Ra < 0,4 / Rz 4	
Min. pressure cycles	100 million	
Process connection	threaded connection G 1 external thread sealing cone	
Displays / operating elements		
Display	Display unit	LED, green
	switching status	LED, yellow
	function display	alphanumeric display, 4-digit
	measured values	alphanumeric display, 4-digit
Display unit	bar; kPa; psi; inH2O; mWS; % of the span	
Remarks		
Remarks	Attention: The unit must only be installed in a process connection for G1 sealing cone. The G1A sealing cone of the unit is only suited for adapters with metal end stop.	
Pack quantity	1 pcs.	
Electrical connection		
Connector: 1 x M12; Contacts: gold-plated		
		



Flush pressure sensor with display

PI-2,5-REA01-MFRKG/US/ /P

Connection

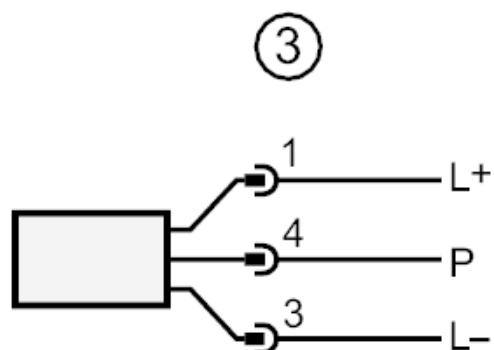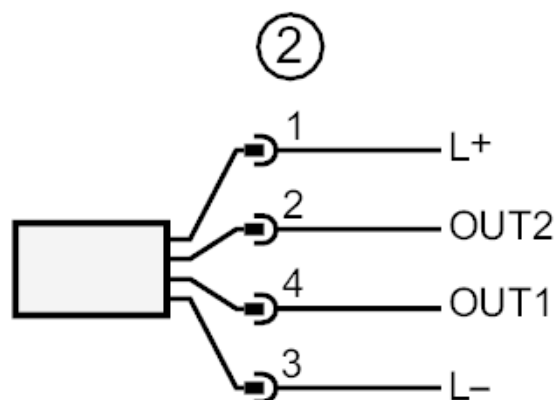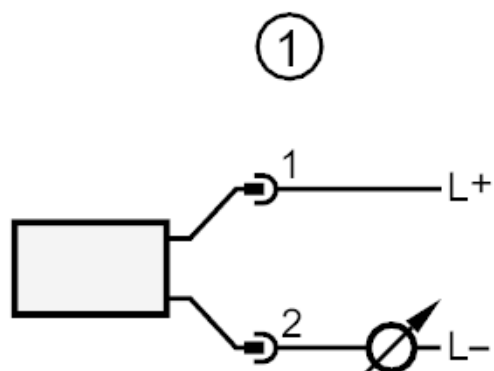

- | | |
|------|--|
| 1 | connection for 2-wire operation |
| 2 | connection for 3-wire operation : |
| OUT1 | switching output |
| OUT2 | switching output |
| | analogue output |
| 3 | connection for IO-Link parameter setting (P = communication via IO-Link) |