


PIM093



Pressure sensor with diagnostic function for pumps

PIM025-RES30-KFPKG/US/ /P

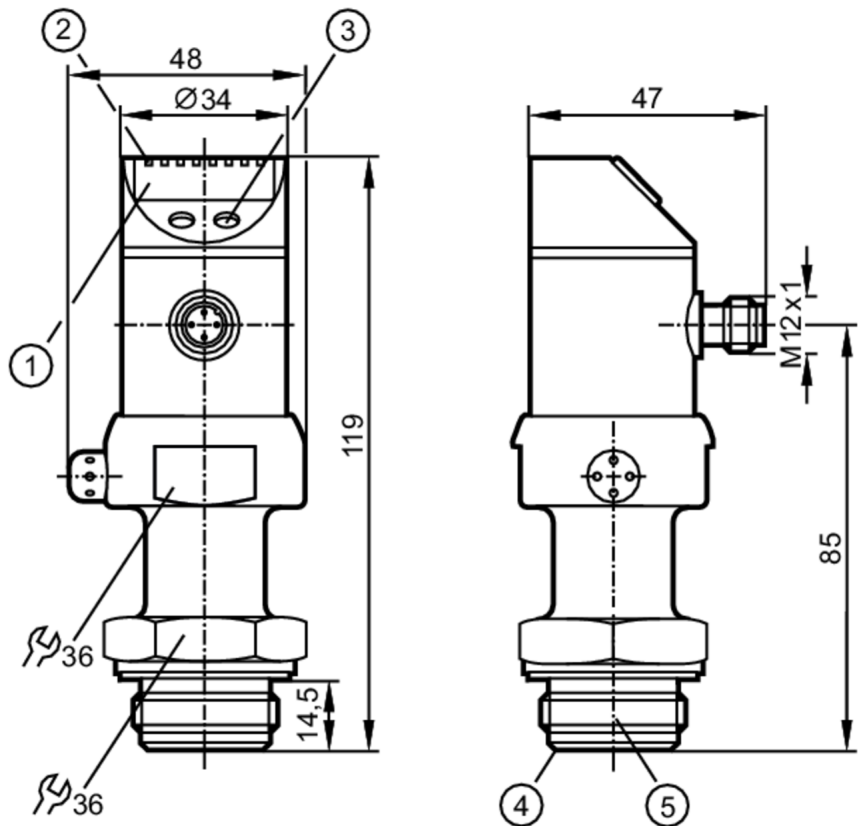

- 1 alphanumeric display 4-digit
- 2 status LEDs
- 3 programming button
- 4 Aseptoflex sealing edge
- 5 Aseptoflex thread



Application

Application	hygienic systems		
Installation	freely rotatable housing 350°		
Media	viscous media and liquids with suspended particles; liquids and gases		
Medium temperature [°C]	-25...125; (145 max. 1h)		
Pressure rating	100 bar	1450 psi	10 MPa
Min. bursting pressure	350 bar	5070 psi	35 MPa
Type of pressure	relative pressure		
No dead space	yes		



Pressure sensor with diagnostic function for pumps

PIM025-RES30-KFPKG/US/ /P

Electrical data			
Operating voltage	[V]	18...32 DC	
Current consumption	[mA]	< 50	
Min. insulation resistance	[MΩ]	100; (500 V DC)	
Protection class		III	
Reverse polarity protection		yes	
Power-on delay time	[s]	0.2	
Integrated watchdog		yes	
Inputs / outputs			
Number of inputs and outputs		Number of digital outputs: 2; Number of analogue outputs: 1	
Outputs			
Total number of outputs		2	
Output signal		switching signal; analogue signal; (configurable)	
Electrical design		PNP	
Number of digital outputs		2	
Output function		normally open / normally closed; (parameterisable)	
Max. voltage drop switching output DC	[V]	2	
Permanent current rating of switching output DC	[mA]	250	
Switching frequency DC	[Hz]	350	
Notes on switching frequency		OUT2	
Number of analogue outputs		1	
Analogue current output	[mA]	4...20, invertible; (scalable)	
Max. load	[Ω]	(Ub - 10 V) / 20 mA	
Short-circuit protection		yes	
Type of short-circuit protection		pulsed	
Overload protection		yes	
Measuring/setting range			
Measuring range		-1...25 bar	-14.4...362.7 psi
Set point SP		-0.96...25 bar	-13.8...362.7 psi
Reset point rP		-1...24.96 bar	-14.4...362.1 psi
Analogue start point		-1...18.74 bar	-14.4...271.8 psi
Analogue end point		5.24...25 bar	76.2...362.7 psi
In steps of		0.02 bar	0.3 psi
Factory setting			OU1 = Fnc
			ASP = 0.00 bar
			OU2 = I
			AEP = 25.00 bar
Accuracy / deviations			
Switch point accuracy		< ± 0,2; (Turn down 1:1)	
	[% of the span]		
Repeatability	[% of the span]	< ± 0,1; (with temperature fluctuations < 10 K; Turn down 1:1)	
Characteristics deviation		< ± 0,2; (Turn down 1:1 linearity, incl. hysteresis and repeatability limit value setting to DIN 16086)	
	[% of the span]		
Linearity deviation		< ± 0,15; (Turn down 1:1)	



Pressure sensor with diagnostic function for pumps

PIM025-RES30-KFPKG/US/ /P

	[% of the span]	
Hysteresis deviation		$< \pm 0,15$; (Turn down 1:1)
	[% of the span]	
Long-term stability		$< \pm 0,1$; (Turn down 1:1; per year)
	[% of the span]	
Temperature coefficient zero point		$< \pm 0,15$; (0...70 °C)
	[% of the span / 10 K]	
Temperature coefficient span		$< \pm 0,1$; (0...70 °C)
	[% of the span / 10 K]	

Response times

Response time	[ms]	< 2.5
Damping for the switching output dAP	[s]	0...10
Damping for the analogue output dAA	[s]	0...10
Step response time analogue output	[ms]	0.2

Software / programming

Parameter setting options	zero point; span
---------------------------	------------------

Operating conditions

Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-40...100
Protection		IP 67; IP 69K

Tests / approvals

EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-5 Surge	0,5/1 kV
	EN 61000-4-6 HF conducted	10 V
Shock resistance	DIN IEC 68-2-27	50 g (11 ms)
Vibration resistance	DIN IEC 68-2-6	20 g (10...2000 Hz)
MTTF	[years]	188

Mechanical data

Weight	[g]	411.2
Materials		stainless steel (1.4404 / 316L); PC; PBT; PEI; FKM; PTFE
Materials (wetted parts)		ceramics (99.9 % Al ₂ O ₃); PTFE; stainless steel (1.4435 / 316L); surface characteristics: Ra < 0,4 / Rz 4
Min. pressure cycles		100 million
Process connection		threaded connection Aseptoflex external thread Aseptoflex

Displays / operating elements

Display	Display unit	4 x LED, green
	switching status	2 x LED, yellow
	function display	alphanumeric display, 4-digit
	measured values	alphanumeric display, 4-digit

PIM093



Pressure sensor with diagnostic function for pumps

PIM025-RES30-KFPKG/US/ /P



Remarks	
Remarks	pump diagnosis for pumps with constant rotational speed (+/- 10 % deviation of the taught rotational speed)
	speed range 40...3000 U/min
	minimum pressure for pump diagnosis 0,5 bar
	The 3-A qualification is only valid if adapters with 3-A qualification are used for installation.
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; Contacts: gold-plated



Connection

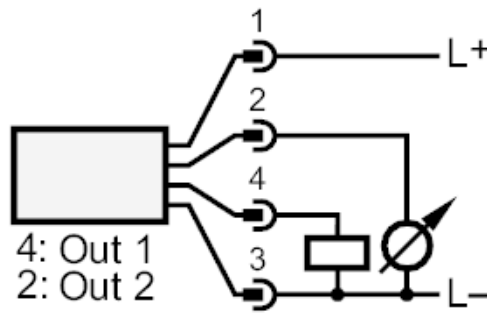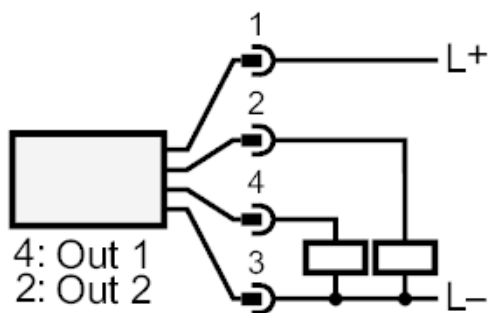

OUT1	pump diagnosis
OUT2	pressure monitoring