


PN2028



Pressure sensor with display

PN-,25-RBR14-MFRKG/US/ IV

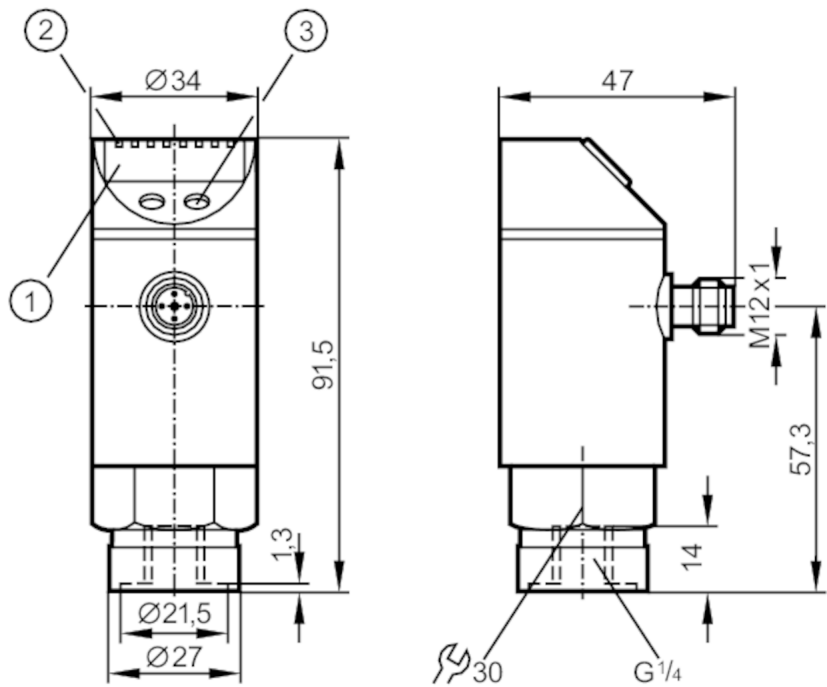

- 1 alphanumeric display 4-digit
- 2 LEDs Display unit / switching status
- 3 programming button



Application			
Media	liquids and gases		
Medium temperature [°C]	-25...80		
Pressure rating	6000 mbar	2400 inH2O	600 kPa
Min. bursting pressure	30000 mbar	12000 inH2O	3000 kPa
Type of pressure	relative pressure		
Electrical data			
Operating voltage [V]	18...32 DC; (according to EN 50178 SELV/PELV)		
Current consumption [mA]	< 35		
Min. insulation resistance [MΩ]	100; (500 V DC)		
Protection class	III		
Reverse polarity protection	yes		
Power-on delay time [s]	0.3		
Integrated watchdog	yes		
Inputs / outputs			
Number of inputs and outputs	Number of digital outputs: 2; Number of analogue outputs: 1		



Pressure sensor with display

PN-,25-RBR14-MFRKG/US/ IV

Outputs			
Total number of outputs	2		
Output signal	switching signal; analogue signal; IO-Link; (configurable)		
Electrical design	PNP/NPN		
Number of digital outputs	2		
Output function	normally open / normally closed; (parameterisable)		
Max. voltage drop switching output DC [V]	2		
Permanent current rating of switching output DC [mA]	250		
Switching frequency DC [Hz]	< 500		
Number of analogue outputs	1		
Analogue current output [mA]	4...20; (scalable 1:4)		
Max. load [Ω]	(Ub - 10 V) / 20 mA		
Analogue voltage output [V]	0...10; (scalable 1:4)		
Min. load resistance [Ω]	2000		
Short-circuit protection	yes		
Type of short-circuit protection	pulsed		
Overload protection	yes		
Measuring/setting range			
Measuring range	-12.5...250 mbar	-5...100.4 inH2O	-1.25...25 kPa
Set point SP	-10.5...250 mbar	-4.2...100.4 inH2O	-1.05...25 kPa
Reset point rP	-11.5...249 mbar	-4.6...100 inH2O	-1.15...24.9 kPa
Analogue start point	-12.5...187.5 mbar	-5...75.4 inH2O	-1.25...10 kPa
Analogue end point	50...250 mbar	20.2...100.4 inH2O	5...25 kPa
In steps of	0.5 mbar	0.2 inH2O	0.05 kPa
Factory setting		SP1 = 62.5 mbar	rP1 = 57.5 mbar
		SP2 = 187.5 mbar	rP2 = 182.5 mbar
		ASP = 0.0 mbar	AEP = 250.0 mbar
Accuracy / deviations			
Switch point accuracy [% of the span]	< ± 0,4; (Turn down 1:1)		
Repeatability [% of the span]	< ± 0,1; (with temperature fluctuations < 10 K; Turn down 1:1)		
Characteristics deviation [% of the span]	< ± 0,25 (BFSL) / < ± 0,5 (LS); (Turn down 1:1; BFSL = Best Fit Straight Line; LS = limit value setting)		
Hysteresis deviation [% of the span]	< ± 0,1; (Turn down 1:1)		
Long-term stability [% of the span]	< ± 0,1; (Turn down 1:1; per year)		
Temperature coefficient zero point [% of the span / 10 K]	< ± 0,2; (0...80 °C)		
Temperature coefficient span [% of the span / 10 K]	< ± 0,2; (0...80 °C)		



Pressure sensor with display

PN-,25-RBR14-MFRKG/US/ IV

Response times		
Response time	[ms]	< 1.5
Damping for the switching output dAP	[s]	0.01...4
Damping for the analogue output dAA	[s]	0.01...4
Max. response time analogue output	[ms]	3
Software / programming		
Parameter setting options	hysteresis / window; normally open / normally closed; switching logic; current/voltage output; Damping; adaptation of displayed values; display can be rotated and switched off; Display unit; zero point; span	
Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.0	
IO-Link device ID	63 d / 00 00 3F h	
Profiles	no profile	
SIO mode	yes	
Required master port type	A	
Process data analogue	1	
Process data binary	2	
Min. process cycle time	[ms]	2.3
Operating conditions		
Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-40...100
Protection	IP 65	
Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-5 Surge	0,5/1 kV
	EN 61000-4-6 HF conducted	10 V
Shock resistance	DIN IEC 68-2-27	50 g (11 ms)
Vibration resistance	DIN IEC 68-2-6	20 g (10...2000 Hz)
MTTF	[years]	131
Mechanical data		
Weight	[g]	263.2
Materials	stainless steel (1.4301 / 304); stainless steel (1.4404 / 316L); PC; PBT; PEI; FKM; PTFE	
Materials (wetted parts)	stainless steel (1.4305 / 303); ceramics; FKM	
Min. pressure cycles	100 million	
Process connection	threaded connection G 1/4 internal thread	

PN2028



Pressure sensor with display

PN-,25-RBR14-MFRKG/US/ /V

Displays / operating elements		
Display	Display unit	4 x LED, green
	switching status	2 x LED, yellow
	function display	alphanumeric display, 4-digit
	measured values	alphanumeric display, 4-digit
Display unit	mbar; kPa; inH2O; mmWS	

Remarks	
Notes	discontinued article
Pack quantity	1 pcs.

Electrical connection





Connector: 1 x M12; Contacts: gold-plated



Pressure sensor with display

PN-,25-RBR14-MFRKG/US/ /V

Connection

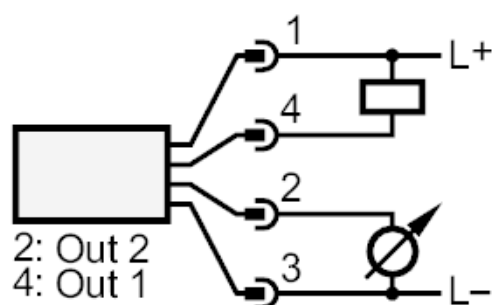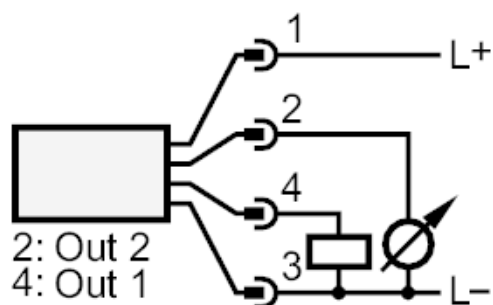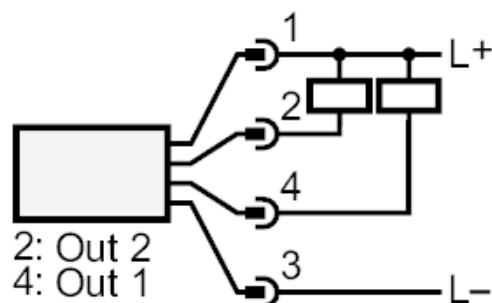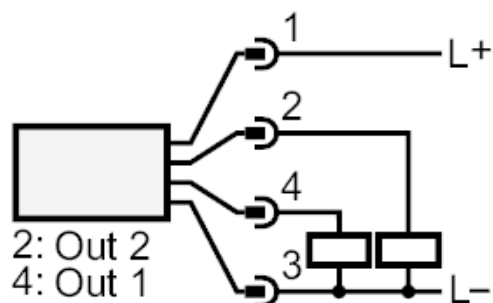

OUT1	switching output
OUT2	switching output
	analogue output