


PN2224



Pressure sensor with display

PN-010-RBN14-MFRKG/US/ IV

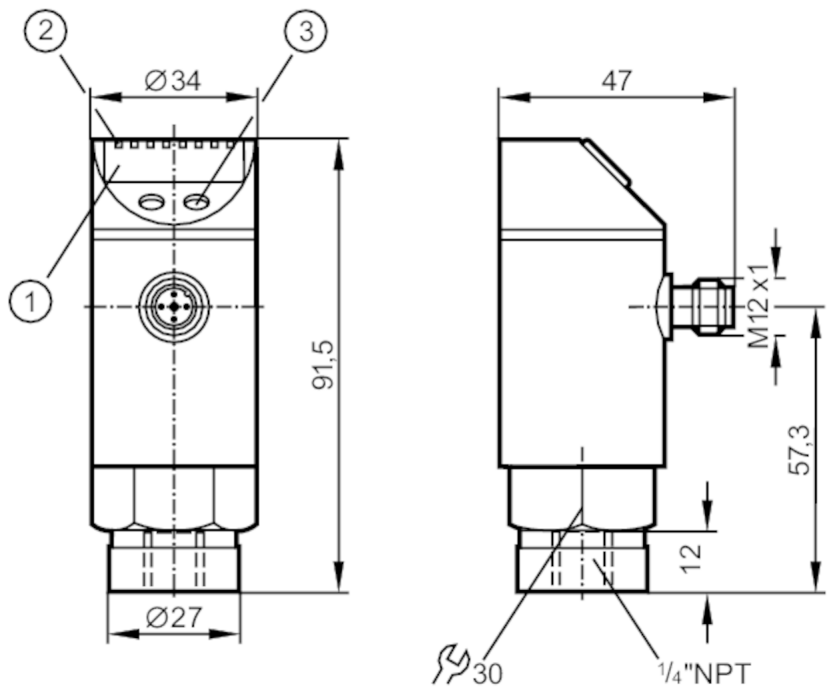

- 1 alphanumeric display 4-digit
- 2 LEDs Display unit / switching status
- 3 programming button



Application			
Media	liquids and gases		
Medium temperature [°C]	-25...80		
Pressure rating	1088 psi	75 bar	7.5 MPa
Min. bursting pressure	2175 psi	150 bar	15 MPa
Type of pressure	relative pressure		
MAWP (for applications according to CRN)	565 psi	39 bar	3.9 MPa
Electrical data			
Operating voltage [V]	18...32 DC; (according to EN 50178 SELV/PELV)		
Current consumption [mA]	< 35		
Min. insulation resistance [MΩ]	100; (500 V DC)		
Protection class	III		
Reverse polarity protection	yes		
Power-on delay time [s]	0.3		
Integrated watchdog	yes		
Inputs / outputs			
Number of inputs and outputs	Number of digital outputs: 2; Number of analogue outputs: 1		



Pressure sensor with display

PN-010-RBN14-MFRKG/US/ /V

Outputs			
Total number of outputs	2		
Output signal	switching signal; analogue signal; IO-Link; (configurable)		
Electrical design	PNP/NPN		
Number of digital outputs	2		
Output function	normally open / normally closed; (parameterisable)		
Max. voltage drop switching output DC [V]	2		
Permanent current rating of switching output DC [mA]	250		
Switching frequency DC [Hz]	< 500		
Number of analogue outputs	1		
Analogue current output [mA]	4...20; (scalable 1:4)		
Max. load [Ω]	(U _b - 10 V) x 50		
Analogue voltage output [V]	0...10; (scalable 1:4)		
Min. load resistance [Ω]	2000		
Short-circuit protection	yes		
Type of short-circuit protection	pulsed		
Overload protection	yes		
Measuring/setting range			
Measuring range	-14.5...145 psi	-1...10 bar	-0.1...1 MPa
Set point SP	-12.8...145 psi	-0.88...10 bar	-0.088...1 MPa
Reset point rP	-13.6...144.2 psi	-0.94...9.94 bar	> -0.094 MPa
Analogue start point	-14.6...105.2 psi	-1...7.26 bar	-0.1...0.726 MPa
Analogue end point	21.8...145 psi		0.15...1 MPa
In steps of	0.29 psi	0.02 bar	0.002 MPa
Factory setting		SP1 = 36.2 psi	rP1 = 33.4 psi
		SP2 = 108.8 psi	rP2 = 105.8 psi
		ASP = 0.0 psi	AEP = 145.0 psi
Accuracy / deviations			
Switch point accuracy [% of the span]	< ± 0,4; (Turn down 1:1)		
Repeatability [% of the span]	< ± 0,1; (with temperature fluctuations < 10 K; Turn down 1:1)		
Characteristics deviation [% of the span]	< ± 0,25 (BFSL) / < ± 0,5 (LS); (Turn down 1:1; BFSL = Best Fit Straight Line; LS = limit value setting)		
Hysteresis deviation [% of the span]	< ± 0,1; (Turn down 1:1)		
Long-term stability [% of the span]	< ± 0,1; (Turn down 1:1; per year)		
Temperature coefficient zero point [% of the span / 10 K]	< ± 0,2; (-25...80 °C)		
Temperature coefficient span [% of the span / 10 K]	< ± 0,2; (-25...80 °C)		



Pressure sensor with display

PN-010-RBN14-MFRKG/US/ /V

Response times		
Response time	[ms]	< 1.5
Damping for the switching output dAP	[s]	0.01...4
Damping for the analogue output dAA	[s]	0.01...4
Max. response time analogue output	[ms]	3
Software / programming		
Parameter setting options	hysteresis / window; normally open / normally closed; switching logic; current/voltage output; Damping; adaptation of displayed values; display can be rotated and switched off; Display unit; zero point; span	
Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38.4 kBaud)	
IO-Link revision	1.0	
Operating conditions		
Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-40...100
Protection	IP 65	
Tests / approvals		
EMC	DIN EN 61000-6-2	
	DIN EN 61000-6-3	
Shock resistance	DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF	[years]	131
Pressure Equipment Directive	article 3, paragraph (3) - Sound Engineering Practice	
Mechanical data		
Weight	[g]	267.4
Materials	stainless steel (1.4301 / 304); stainless steel (1.4404 / 316L); PC; PBT; PEI; FKM; PTFE	
Materials (wetted parts)	stainless steel (1.4305 / 303); ceramics; FKM	
Min. pressure cycles	100 million	
Process connection	threaded connection 1/4 NPT internal thread	
Displays / operating elements		
Display	Display unit	3 x LED, green
	switching status	2 x LED, yellow
	function display	alphanumeric display, 4-digit
	measured values	alphanumeric display, 4-digit
Remarks		
Notes	discontinued article	
Pack quantity	1 pcs.	
Electrical connection		
Connector: 1 x M12; Contacts: gold-plated		

PN2224







Pressure sensor with display

PN-010-RBN14-MFRKG/US/ /V



Connection

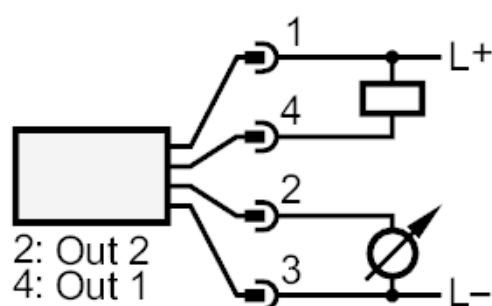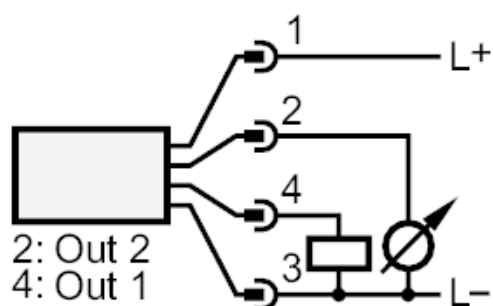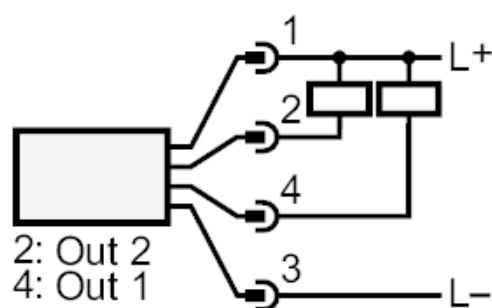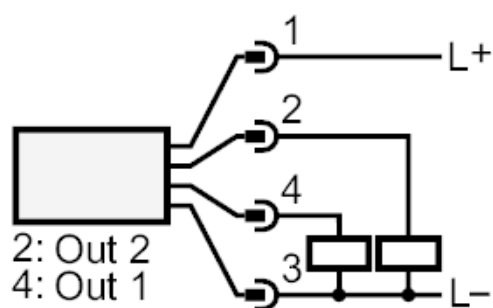

OUT1	switching output
OUT2	switching output
	analogue output