


# PN5207



## Pressure sensor with display

PN-001BRBN14-HFPKG/US/ IV

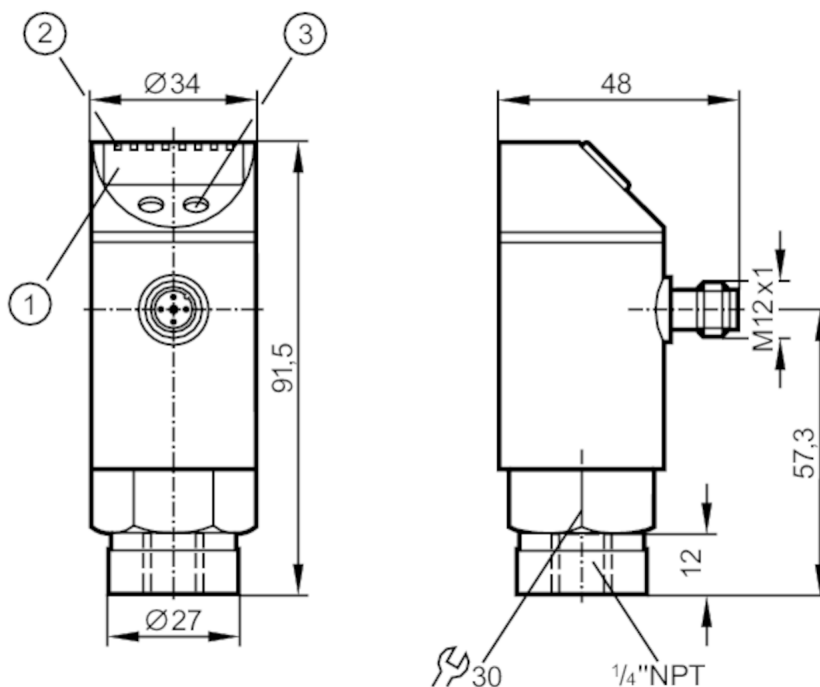

- 1 alphanumeric display 4-digit
- 2 LEDs Display unit / switching status
- 3 programming button



### Application

|                         |                   |            |
|-------------------------|-------------------|------------|
| Media                   | liquids and gases |            |
| Medium temperature [°C] | -25...80          |            |
| Pressure rating         | 145 psi           | 10000 mbar |
| Min. bursting pressure  | 450 psi           | 30000 mbar |
| Type of pressure        | relative pressure |            |

### Electrical data

|                                 |                                               |
|---------------------------------|-----------------------------------------------|
| Operating voltage [V]           | 18...36 DC; (according to EN 50178 SELV/PELV) |
| Current consumption [mA]        | < 50                                          |
| Min. insulation resistance [MΩ] | 100; (500 V DC)                               |
| Protection class                | III                                           |
| Reverse polarity protection     | yes                                           |
| Overvoltage protection          | yes; (< 40 V)                                 |
| Power-on delay time [s]         | 0.3                                           |
| Integrated watchdog             | yes                                           |

### Inputs / outputs

|                              |                              |
|------------------------------|------------------------------|
| Number of inputs and outputs | Number of digital outputs: 1 |
|------------------------------|------------------------------|



## Pressure sensor with display

PN-001BRBN14-HFPKG/US/ IV

| Outputs                                                   |                                                                                                         |                |               |
|-----------------------------------------------------------|---------------------------------------------------------------------------------------------------------|----------------|---------------|
| Total number of outputs                                   | 1                                                                                                       |                |               |
| Output signal                                             | switching signal                                                                                        |                |               |
| Electrical design                                         | PNP                                                                                                     |                |               |
| Number of digital outputs                                 | 1                                                                                                       |                |               |
| Output function                                           | normally open / normally closed; (parameterisable)                                                      |                |               |
| Max. voltage drop switching output DC [V]                 | 2                                                                                                       |                |               |
| Permanent current rating of switching output DC [mA]      | 250                                                                                                     |                |               |
| Switching frequency DC [Hz]                               | < 170                                                                                                   |                |               |
| Short-circuit protection                                  | yes                                                                                                     |                |               |
| Type of short-circuit protection                          | pulsed                                                                                                  |                |               |
| Measuring/setting range                                   |                                                                                                         |                |               |
| Measuring range                                           | 0...14.5 psi                                                                                            | 0...1000 mbar  |               |
| Set point SP                                              | 0.2...14.5 psi                                                                                          | 10...1000 mbar |               |
| Reset point rP                                            | 0.1...14.4 psi                                                                                          | 5...995 mbar   |               |
| In steps of                                               | 0.1 psi                                                                                                 | 5 mbar         |               |
| Factory setting                                           |                                                                                                         | SP1 = 3.6 psi  | rP1 = 3.3 psi |
| Accuracy / deviations                                     |                                                                                                         |                |               |
| Switch point accuracy [% of the span]                     | < ± 0,5                                                                                                 |                |               |
| Repeatability [% of the span]                             | < ± 0,1; (with temperature fluctuations < 10 K)                                                         |                |               |
| Characteristics deviation [% of the span]                 | < ± 0,25 (BFSL) / < ± 0,5 (LS); (BFSL = Best Fit Straight Line; LS = limit value setting)               |                |               |
| Hysteresis deviation [% of the span]                      | < ± 0,25                                                                                                |                |               |
| Long-term stability [% of the span]                       | < ± 0,05; (per 6 months)                                                                                |                |               |
| Temperature coefficient zero point [% of the span / 10 K] | 0,2; (-20...80 °C)                                                                                      |                |               |
| Temperature coefficient span [% of the span / 10 K]       | 0,2; (-20...80 °C)                                                                                      |                |               |
| Response times                                            |                                                                                                         |                |               |
| Delay time programmable dS, dr [s]                        | 0; 0,2...50                                                                                             |                |               |
| Software / programming                                    |                                                                                                         |                |               |
| Parameter setting options                                 | hysteresis / window; normally open / normally closed; switch-on/switch-off delay; Damping; Display unit |                |               |
| Operating conditions                                      |                                                                                                         |                |               |
| Ambient temperature [°C]                                  | -20...80                                                                                                |                |               |
| Storage temperature [°C]                                  | -40...100                                                                                               |                |               |
| Protection                                                | IP 65                                                                                                   |                |               |

# PN5207



## Pressure sensor with display

PN-001BRBN14-HFPKG/US/ IV

| Tests / approvals                                                                   |                                                                                          |                               |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|-------------------------------|
| EMC                                                                                 | EN 61000-4-2 ESD                                                                         | 4 kV CD / 8 kV AD             |
|                                                                                     | EN 61000-4-3 HF radiated                                                                 | 10 V/m                        |
|                                                                                     | EN 61000-4-4 Burst                                                                       | 2 kV                          |
|                                                                                     | EN 61000-4-5 Surge                                                                       | 0,5/1 kV                      |
|                                                                                     | EN 61000-4-6 HF conducted                                                                | 10 V                          |
| Shock resistance                                                                    | DIN IEC 68-2-27                                                                          | 50 g (11 ms)                  |
| Vibration resistance                                                                | DIN IEC 68-2-6                                                                           | 20 g (10...2000 Hz)           |
| MTTF                                                                                | [years]                                                                                  | 231                           |
| Mechanical data                                                                     |                                                                                          |                               |
| Weight                                                                              | [g]                                                                                      | 262.2                         |
| Materials                                                                           | stainless steel (1.4301 / 304); stainless steel (1.4404 / 316L); PC; PBT; PEI; FKM; PTFE |                               |
| Materials (wetted parts)                                                            | stainless steel (1.4305 / 303); ceramics; FKM                                            |                               |
| Min. pressure cycles                                                                | 100 million                                                                              |                               |
| Process connection                                                                  | threaded connection 1/4 NPT external thread                                              |                               |
| Displays / operating elements                                                       |                                                                                          |                               |
| Display                                                                             | Display unit                                                                             | 4 x LED, green                |
|                                                                                     | switching status                                                                         | LED, yellow                   |
|                                                                                     | function display                                                                         | alphanumeric display, 4-digit |
|                                                                                     | measured values                                                                          | alphanumeric display, 4-digit |
| Display unit                                                                        | mbar; kPa; psi; inHg                                                                     |                               |
| Remarks                                                                             |                                                                                          |                               |
| Notes                                                                               | discontinued article                                                                     |                               |
| Pack quantity                                                                       | 1 pcs.                                                                                   |                               |
| Electrical connection                                                               |                                                                                          |                               |
| Connector: 1 x M12; Contacts: gold-plated                                           |                                                                                          |                               |
|  |                                                                                          |                               |

# PN5207



## Pressure sensor with display

PN-001BRBN14-HFPKG/US/ IV

### Connection

