




A complete, versatile system of modular containers, perfectly integrable in the SYSTEM domestic range and able to meet the high protection installation requirements of the residential, commercial and industrial sectors. The 27 COMBI range is available both in the IP40 version and in watertight versions with IP55, IP65 and IP66 degree of protection, recommended for all outdoor applications which are subjected to extreme atmospheric conditions.

|                  |               |                           |            |
|------------------|---------------|---------------------------|------------|
| Colour           | Grey RAL 7035 | IP degree                 | IP44       |
| Insulation class | II            | Outer dim. LxHxD (mm)     | 116x90x45  |
| Rated voltage    | 400V ac       | Rated current (A)         | 16         |
| No. of poles     | 3P+E          | Reference h               | 6          |
| Glow Wire Test   | 650 °C        | Thermo-pressure with ball | 70 °C      |
| Standard         | IEC 309       | Installation temperature  | -25 +60 °C |
| Electrocod       | 2210          |                           |            |

#### BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

| Saline solution | Acids              |           | Bases        |           | Solvents           |               |               |               | Mineral oil        | UV rays   |
|-----------------|--------------------|-----------|--------------|-----------|--------------------|---------------|---------------|---------------|--------------------|-----------|
|                 | Concentrated       | Diluted   | Concentrated | Diluted   | Hexane             | Benzol        | Acetone       | Alcohol       |                    |           |
| Resistant       | Limited resistance | Resistant | Resistant    | Resistant | Limited resistance | Not resistant | Not resistant | Not resistant | Limited resistance | Resistant |

#### DIMENSIONAL

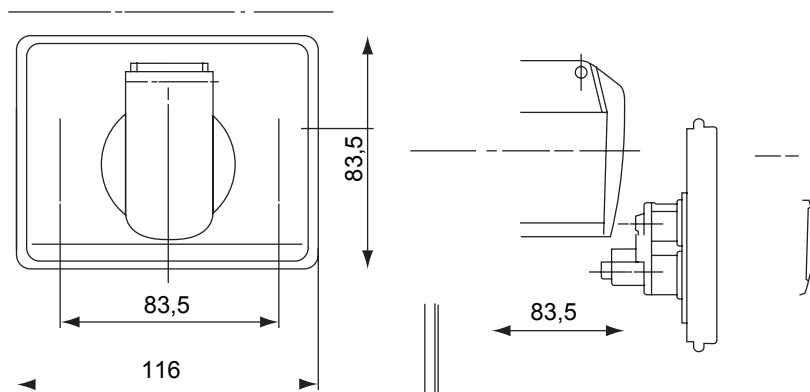


#### TECHNICAL SYMBOLOGY

**IP**

IP44

**GWT**

650 °C



II

#### STANDARDS/APPROVALS

