






A range of ChoruSmart modular devices and plates made of antibacterial technopolymer in a glossy white finish, suitable for use in hospitals, nursing homes, schools and wherever cleanness and hygiene are essential. The effective silver-ion antibacterial treatment can reduce bacterial growth by 99% within 24 hours and has been verified by certified laboratory testing in accordance with standard ISO 22196 (analysis of major strains of Staphylococcus aureus and E. coli bacterial species).

|                                                 |                            |                                                      |                                |
|-------------------------------------------------|----------------------------|------------------------------------------------------|--------------------------------|
| Category                                        | Interruttore               | Button key                                           | Neutral                        |
| Symbol                                          | 0/1                        | Colour                                               | Glossy white                   |
| Description                                     | 2P - 16 AX                 | Voltage                                              | 250 V ac                       |
| Standard                                        | EN 60669-1; ISO 22196      | Resistance at test voltage                           | 2000 V at 50 Hz for 1 minute   |
| Rated power of 230V LED lamps                   | 200 W                      | Insulation resistance                                | > 5 MOhm                       |
| Wiring terminals                                | With screw                 | Prolonged operation switch (no. of position changes) | 40.000 at In 250 V ac cosφ=0,6 |
| Thermo-pressure with ball                       | 125 °C                     | Glow Wire Test                                       | 850 °C                         |
| Terminal grip on cable traction                 | > 50 N                     | Terminal tightening capacity stranded cables (mm²)   | min. 0,75 - max. 2x4           |
| Terminal tightening capacity solid cables (mm²) | min. 0,5 - max. 2x2,5      | No. modules                                          | 1                              |
| Material                                        | Antibacterial tecnopolymer | Electrocod                                           | 0130                           |

## DIMENSIONAL

3.8

3.7

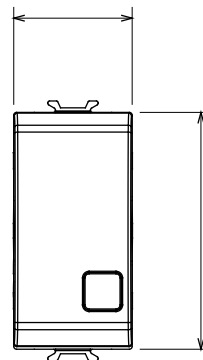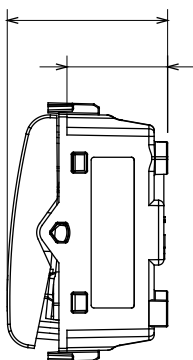

## TECHNICAL SYMBOLOGY



## STANDARDS/APPROVALS

