
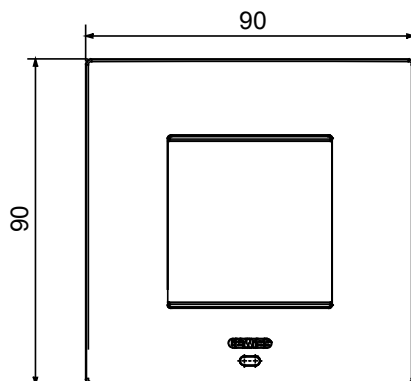


Smart plate can be used with Home Gateway for "CONNECTED SMART HOME" solutions. The EGO SMART plates integrate with the connected devices of the ChoruSmart system, they go beyond pure aesthetics and become an element of interaction with the user. The plates communicate with the other connected devices and, using RGB perimeter LED strips and a graphic display, can communicate operating statuses and any alarms detected by the smart functions that control the home to the user. The traditional EGO SMART and EGO plates can be used in the same system as they are designed to blend in perfectly.

|                                      |                                                                                             |                     |                                                                                                          |
|--------------------------------------|---------------------------------------------------------------------------------------------|---------------------|----------------------------------------------------------------------------------------------------------|
| Colour                               | Satin black                                                                                 | Description         | 2 modules                                                                                                |
| For support codes                    | GW16821N, GW16822N                                                                          | Power supply        | Via one of the suitable connected devices installed within it or via dedicated power supply unit GWA1700 |
| Standard                             | 2014/35/EU, 2014/30/EU, 2011/65/EU + 2015/863, EN 62368-1, EN 55032, EN 55035, EN IEC 63000 | Working temperature | -5 ÷ +45 °C                                                                                              |
| Relative humidity (non-condensative) | Max 93%                                                                                     | IP degree           | IP20                                                                                                     |
| Functions                            | System information/status with messages on the display and notifications by RGB LED strips. | Material            | Painted technopolymer                                                                                    |
| Finishing                            | Opaque finish                                                                               | Glow wire test      | 650 °C                                                                                                   |
| Thermo-pressure with ball            | 70 °C                                                                                       | Family              | EGO SMART                                                                                                |
| User interface                       | The plate is equipped with a dot-matrix display and RGB LED strips                          |                     |                                                                                                          |

#### DIMENSIONAL



#### TECHNICAL SYMBOLOGY

**IP**

IP20

**GWT**

650 °C



70 °C

#### STANDARDS/APPROVALS

