




The System modular devices allow the creation of infinite combinations of devices and plates, through a complete range that covers all design, functional and installation needs. Colours and finishes: satin black, elegant and classy. Ideal for flush-mounted solutions (for rectangular or square boxes), surface-mounted solutions and special applications. The range includes control units, socket-outlets, breakers, indicators, connectors and devices for the control, safety and comfort of your home

|                                                     |                                |                                                 |                              |
|-----------------------------------------------------|--------------------------------|-------------------------------------------------|------------------------------|
| Category                                            | Socket-Outlet                  | Description                                     | 2P - 16A                     |
| Colour                                              | Black                          | Voltage                                         | 250 V ac                     |
| Earth pit                                           | -                              | Standard                                        | French                       |
| Characteristics                                     | With screw                     | For plug pins                                   | Ø 4 / 4.8 mm                 |
| Standard                                            | IEC 60884-1; NF C 61-314       | Resistance at test voltage                      | 2000 V at 50 Hz for 1 minute |
| Prolonged operation switch (no.of position changes) | 10.000 at In 250 V ac cosφ=0,8 | Thermo-pressure with ball                       | 125 °C                       |
| Glow Wire Test                                      | 850 °C                         | Terminal grip on cable traction                 | > 50 N                       |
| Terminal tightening capacity stranded cables (mm²)  | min. 0,75 - max. 2x4           | Terminal tightening capacity solid cables (mm²) | min. 0,5 - max. 2x2,5        |
| No. SYSTEM modules                                  | 2                              | Material                                        | Technopolymer                |
| Electrocod                                          | 0131                           |                                                 |                              |

#### DIMENSIONAL

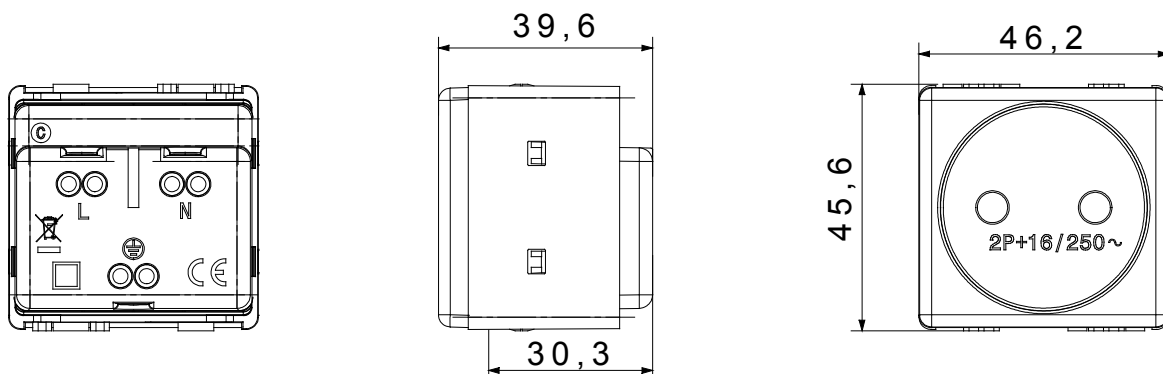

#### TECHNICAL SYMBOLOGY



#### STANDARDS/APPROVALS

