




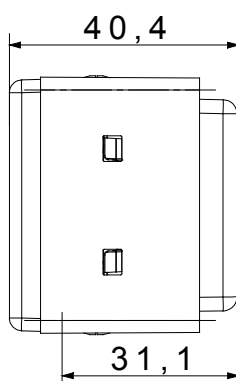

The System modular devices allow the creation of infinite combinations of devices and plates, through a complete range that covers all design, functional and installation needs. Colours and finishes: satin black, elegant and classy. Ideal for flush-mounted solutions (for rectangular or square boxes), surface-mounted solutions and special applications. The range includes control units, socket-outlets, breakers, indicators, connectors and devices for the control, safety and comfort of your home

|                                                 |                              |                                                      |                                |
|-------------------------------------------------|------------------------------|------------------------------------------------------|--------------------------------|
| Category                                        | Socket-Outlet                | Description                                          | 2P+E - 16A                     |
| Colour                                          | Black                        | Voltage                                              | 250 V ac                       |
| Earth pit                                       | -                            | Standard                                             | French                         |
| Characteristics                                 | With screw                   | For plug pins                                        | Ø 4 / 4.8 mm                   |
| Wiring terminals                                | Screw-on terminals           | Standard                                             | IEC 60884-1; NF C 61-314       |
| Resistance at test voltage                      | 2000 V at 50 Hz for 1 minute | Prolonged operation switch (no. of position changes) | 10.000 at In 250 V ac cosφ=0,8 |
| Thermo-pressure with ball                       | 125 °C                       | Glow Wire Test                                       | 850 °C                         |
| Terminal grip on cable traction                 | > 50 N                       | Terminal tightening capacity stranded cables (mm²)   | min. 0,75 - max. 2x4           |
| Terminal tightening capacity solid cables (mm²) | min. 0,5 - max. 2x2,5        | No. SYSTEM modules                                   | 2                              |
| Material                                        | Technopolymer                | Electrocod                                           | 0131                           |

#### DIMENSIONAL



#### TECHNICAL SYMBOLOGY



#### STANDARDS/APPROVALS

