




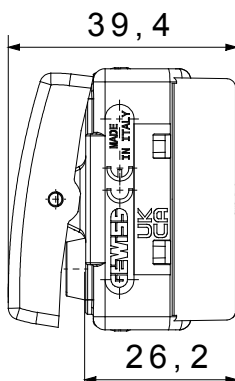

The System modular devices allow the creation of infinite combinations of devices and plates, through a complete range that covers all design, functional and installation needs. Colours and finishes: satin black, elegant and classy. Ideal for flush-mounted solutions (for rectangular or square boxes), surface-mounted solutions and special applications. The range includes control units, socket-outlets, breakers, indicators, connectors and devices for the control, safety and comfort of your home

|                                                     |                                |                                                 |                       |
|-----------------------------------------------------|--------------------------------|-------------------------------------------------|-----------------------|
| Category                                            | Interruttore                   | Button key                                      | Neutral               |
| Symbol                                              | 0/1                            | Colour                                          | Black                 |
| Description                                         | 2P - 16 AX                     | Voltage                                         | 250 V ac              |
| Signalling unit                                     | -                              | Standard                                        | EN 60669-1            |
| Resistance at test voltage                          | 2000 V at 50 Hz for 1 minute   | Rated power of 230V LED lamps                   | 200 W                 |
| Insulation resistance                               | > 5 MOhm                       | Wiring terminals                                | With screw            |
| Prolonged operation switch (no.of position changes) | 40.000 at In 250 V ac cosφ=0,6 | Thermo-pressure with ball                       | 125 °C                |
| Glow Wire Test                                      | 850 °C                         | Terminal grip on cable traction                 | > 50 N                |
| Terminal tightening capacity stranded cables (mm²)  | min. 0,75 - max. 2x4           | Terminal tightening capacity solid cables (mm²) | min. 0,5 - max. 2x2,5 |
| No. SYSTEM modules                                  | 1                              | Material                                        | Technopolymer         |
| Electrocod                                          | 0130                           |                                                 |                       |

#### DIMENSIONAL



#### TECHNICAL SYMBOLOGY



#### STANDARDS/APPROVALS

