


Description Automatic reclosing device  
Code ReStart Autotest PRO 4P  
Rated voltage AC 400 V  
Rated current 40 A  
No. modules 7  
Standard IEC EN 63024, IEC EN 61008-1, IEC EN 61008-2-1  
Rated frequency (Hz) 50Hz  
Distribution system TT - TN-S

|                                                                   |                                |                                                         |                       |
|-------------------------------------------------------------------|--------------------------------|---------------------------------------------------------|-----------------------|
| Rated non-operating resistance between live parts and earth (Rdo) | 8kΩ                            | Insulation voltage (Ui)                                 | 500 V                 |
| Rated operating resistance between live parts and earth (Rd)      | 16 kΩ                          | Rated impulse withstand voltage (Uimp)                  | 4 kV                  |
| Maximum operating frequency                                       | 30 oper./h                     | Overvoltage category                                    | III                   |
| Mechanical endurance                                              | 4000                           | Dielectric strength test voltage between pole and earth | 2500 Vac for 1 minute |
| Type of residual current protection                               | A[IR]                          | Rated residual operating current                        | 30 mA                 |
| Operating temperature                                             | -25 +60 °C                     | Stocking temperature                                    | -40°C ÷ +70°C         |
| Type of contacts                                                  | Photomos (potential free)      | Voltage operating                                       | 5-230 V ac/dc         |
| Current operating                                                 | 0.6mA (min)-100mA cosφ=1 (max) | Operating frequency                                     | 50 Hz                 |
| Use category                                                      | AC12                           | Operating modes                                         | NO/NC/NC + pulse      |
| Rated tightening torque                                           | 0,4 Nm                         | Terminal section                                        | ≤ 2,5 mm²             |
| Automatic reclosure for untimely tripping                         | Yes                            | Earth failure test                                      | Yes                   |
| Continuous system monitoring                                      | Yes                            | Autotest (automatic RCCB protection test)               | Yes                   |
| Completeable with                                                 | Modulo BUS RS485 GW90992       | Number of poles                                         | 4P                    |
| Electrocod                                                        | 1414                           |                                                         |                       |

## DIMENSIONAL

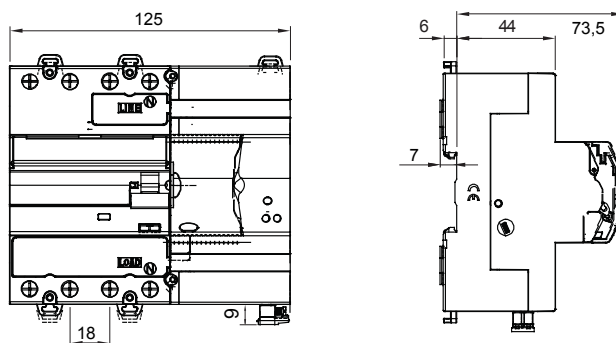

## STANDARDS/APPROVALS

