



Description Automatic reclosing device

Code ResStart Rd PRO 2P

Coupled with GWD4817

Rated voltage AC 230 V

Rated current 25 A


No. modules 3

Standard IEC EN 63024, IEC EN 61008-1, IEC EN 61008-2-1

Rated frequency (Hz) 50 - 60 Hz

Distribution system	TT - TN-S	Rated non-operating resistance between live parts and earth (Rdo)	8kΩ
Insulation voltage (Ui)	500 V	Rated operating resistance between live parts and earth (Rd)	16 kΩ
Rated impulse withstand voltage (Uimp)	4 kV	Maximum operating frequency	30 oper./h
Overvoltage category	III	Mechanical endurance	4000
Dielectric strength test voltage between pole and earth	2500 Vac for 1 minute	Type of residual current protection	A
Rated residual operating current	30 mA	Operating temperature	-5 +60 °C
Stocking temperature	-40°C ÷ +70°C	Automatic reclosure for untimely tripping	Yes
Earth failure test	Yes	Continuous system monitoring	Yes
Completeable with	Contatto ausiliario GWD0951 - Modulo BUS RS485 GW90992	Number of poles	2P
Electrocod	1414		

DIMENSIONAL

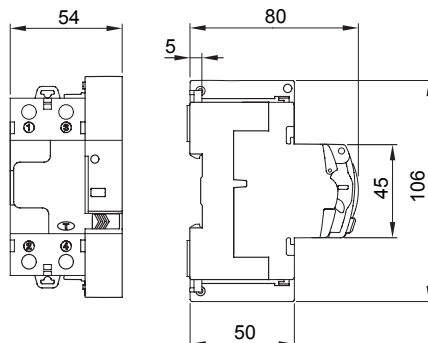

STANDARDS/APPROVALS

