




Description Auxiliary contact for motor protection switches
 Thermal current (Ith) 5 A
 Rated operational current AC-15 (240 V) 1,5 A
 Rated operational current DC-13 (250 V) 0,1 A
 Type of contacts 1NA + 1NC
 No. modules 0.5

ELECTRICAL CHARACTERISTICS		- MECHANICAL AND FUNCTIONAL CHARACTERISTICS	
Standard	IEC/EN 60947-4-1, IEC/EN 60947-5-1	Mechanical endurance (O-C cycle number)	100000
Insulation voltage (Ui)	500 V	Electrical endurance (O-C cycle number)	100000
Rated impulse withstand voltage (Uimp)	6 kV	Cable section (mm²)	2.5 mm²
-	-	- Max. conductor stripping length	8 mm
-	-	- Rated tightening torque	0,6 Nm

DIMENSIONAL

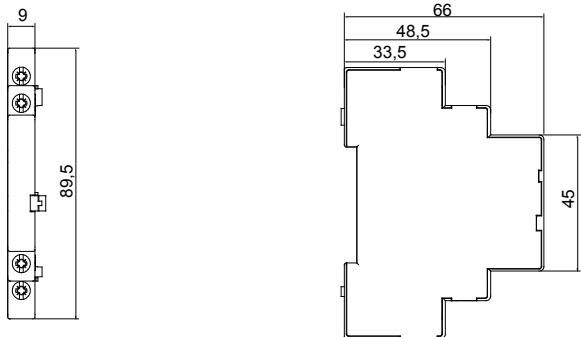

STANDARDS/APPROVALS

