


A range of tabletop panels, wall boxes and self-supporting wall enclosures suitable for housing ChorusSmart modular devices. Wall boxes and panels, available in black and white, must be completed with ChorusSmart support and One plates. The self-supporting enclosures, available in grey RAL 7035, are characterised in IP40 and IP55 versions: both have pre-cut knockouts, and the watertight version is also provided with a door with a transparent UV membrane. Self-supporting boxes and enclosures are designed to be fitted with an earth terminal.

|                           |              |                          |             |
|---------------------------|--------------|--------------------------|-------------|
| Description               | 3 modules    | Colour                   | Satin White |
| Characteristics           | Halogen free | Support                  | GW16803     |
| Suitable for plates       | ONE          | Torque screws tightening | 0.8 NM      |
| Outer dim. LxHxD (mm)     | 118x90x46    | Glow wire test           | 650 °C      |
| Thermo-pressure with ball | 70 °C        | Standard                 | EN 60670-1  |
| Installation temperature  | -5 +60 °C    | Electrocod               | 0212        |

#### DIMENSIONAL

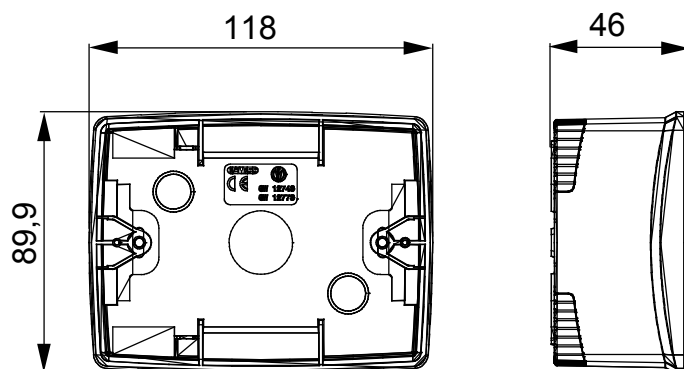

#### TECHNICAL SYMBOLOGY




**GWT**

650 °C



70 °C

INSTALLATION



#### STANDARDS/APPROVALS

