


|                            |                              |                                  |         |
|----------------------------|------------------------------|----------------------------------|---------|
| For walls                  | Brickwall                    | Glow Wire Test                   | 650 °C  |
| Houseable interloc. socket | 1                            | IP degree                        | IP44    |
| Mechanical resistance      | IK08                         | Houseable IB socket-outlets      | 16/32 A |
| For socket-outlets         | CBF horizontal               | Electrocod                       | 2220    |
| Drilling bottom            | Through multidiameter cutter | Minimum installation temperature | -15°C   |

DIMENSIONAL

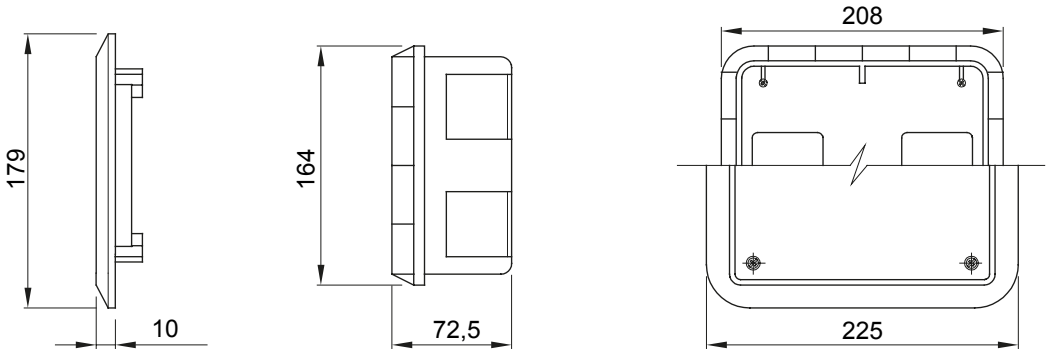

TECHNICAL SYMBOLOGY

|            |           |           |
|------------|-----------|-----------|
| <b>GWT</b> | <b>IP</b> | <b>IK</b> |
| 650 °C     | IP44      | IK08      |

STANDARDS/APPROVALS

