


|                             |                                                                   |                       |                                        |
|-----------------------------|-------------------------------------------------------------------|-----------------------|----------------------------------------|
| Top entries                 | 2xØ 23                                                            | Glow Wire Test        | 650 °C                                 |
| IP degree                   | IP67                                                              | Mechanical resistance | IK08                                   |
| Bottom entries              | 1xØ 29/37                                                         | Electrocod            | 2222                                   |
| Houseable IB socket-outlets | N. 1 IEC 309 16-32A IP44/67 + N.1 16A MAX 3P+E or GW27401/GW27403 |                       | Minimum installation temperature -25°C |

## DIMENSIONAL

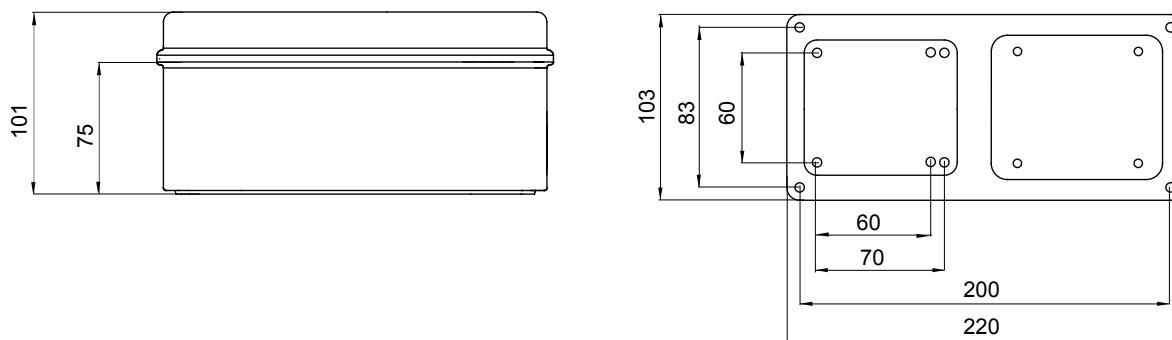

## TECHNICAL SYMBOLOGY

**GWT**

650 °C

**IP**

IP67

**IK**

IK08

## STANDARDS/APPROVALS

