
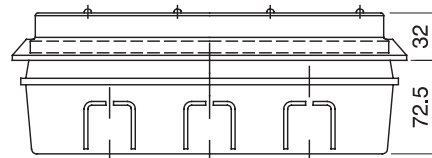


|                 |                              |                                  |                                                                   |
|-----------------|------------------------------|----------------------------------|-------------------------------------------------------------------|
| For walls       | Plasterboard                 | Glow Wire Test                   | 650 °C                                                            |
| IP degree       | IP55                         | Mechanical resistance            | IK08                                                              |
| Electrocod      | 2222                         | Houseable IB socket-outlets      | N. 1 IEC 309 16-32A IP44/67 + N.1 16A MAX 3P+E or GW27401/GW27403 |
| Drilling bottom | Through multidiameter cutter | Minimum installation temperature | -15°C                                                             |

## DIMENSIONAL

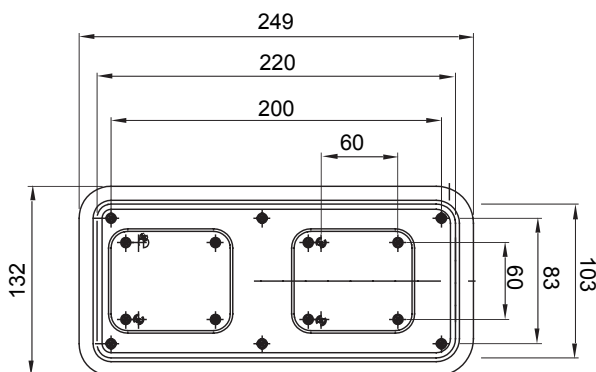

## TECHNICAL SYMBOLOGY

**GWT**

650 °C

**IP**

IP55

**IK**

IK08

## STANDARDS/APPROVALS

