



A product range comprising industrial-type socket-outlets conforming to IEC 60309 Standard, with rotary switch mechanical interlock for individual or group applications on modular bases. The robustness of the products and their resistance to the main chemical and atmospheric agents, together with the high IP66 degree of protection, mean they can be installed in tough environments with critical atmospheric, chemical and mechanical (accidental impact) conditions.

Type of fuse

Thermo-pressure with ball

IP degree

Mechanical resistance

Operating temperature

With back-mounting box

Glow wire test

IB socket outlet rated current (In)

Reference h

Type of use

Ø 22x58 mm Type

80 °C Impact resistance at -20 °C

Vertical

20 J

IP66 No. of poles

3P+E

> IK10 Frequency

50/60 Hz

-25 +40 °C Protection

Fuse-holder base (CBF)

Yes Electrocod

2222

850 °C Colour

Blue

50 A Rated current (A)

63


9 Rated voltage

200 - 250 V


Heavy duty

Heavy duty

DIMENSIONAL

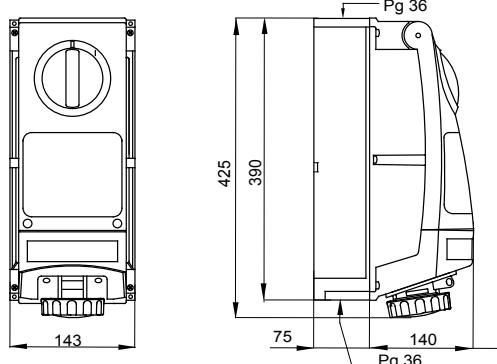

TECHNICAL SYMOLOGY



IP

IP66

IK

> IK10



GWT

850 °C

STANDARDS/APPROVALS

