



A product range comprising industrial-type socket-outlets conforming to IEC 60309 Standard, with rotary switch mechanical interlock for individual or group applications on modular bases. The robustness of the products and their resistance to the main chemical and atmospheric agents, together with the high IP66 degree of protection, mean they can be installed in tough environments with critical atmospheric, chemical and mechanical (accidental impact) conditions.

Type of fuse

Ø 10.3x38 mm

Thermo-pressure with ball

Type 80 °C Impact resistance at -20 °C

Vertical

20 J

IP degree

IP66 No. of poles

2P+E

Mechanical resistance

> IK10 Frequency

50/60 Hz

Operating temperature

-25 +40 °C Protection

Fuse-holder base (CBF)

2222

With back-mounting box

Yes Electrocod

Blue

Glow wire test

850 °C Colour

6

Rated current (A)


16 Reference h

Rated voltage


200 - 250 V Type of use

Heavy duty

DIMENSIONAL

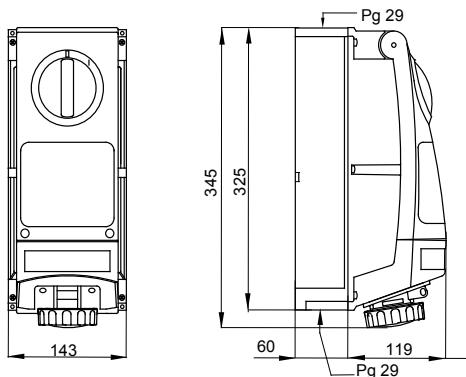

TECHNICAL SYMOLOGY



IP

IP66

IK

> IK10



GWT

850 °C

STANDARDS/APPROVALS

