




Range of Watertight surface-mounting boards made in polyester material reinforced with fibreglass. In compliance with IEC 61439-1 (CEI 17/113), IEC 61439-2 (CEI 17/114), IEC 60670-1 (CEI 23/48), IEC 60670-24 (CEI 23/49) e IEC 62208 (CEI 17-87). Available in 7 sizes, transparent and black door versions with IP66 protection degree. Fast&Easy accessories, made in metal, allow the installation of modular devices and moulded-case circuit breakers up to 250A into the boards, reducing assembly times by up to 40%. Indicated for automation and distribution for indoor and outdoor applications.


GENERAL INFORMATION

Standard	EN 61439-1, EN 61439-2, EN62208, EN 60670-1, IEC 60670-24	Operating temperature	-25 +60 °C
Family	46 QP	IP degree	IP66
Type of door	Transparent door	Mechanical resistance	Bottom IK10
Nominal dim. LxHxD (mm)	585x800x300	Glow Wire Test	650 °C
Functional dim. LxHxD (mm)	591x804x300	Thermo-pressure with ball	Cassa 200 °C - Oblò 70 °C
Material	Polyester reinforced with fibreglass	UV resistance	SI, secondo EN 62208
Type of material	Halogen-free in compliance with EN 60754-2	ELECTRICAL CHARACTERISTICS	
Colour	Grey RAL 7035	Insulation class	II
No. of modules EN 50022	140 (28x5)	Maximum rated insulation voltage (Ui)	690 V
No. locks	2	Insulation voltage	1000 V AC - 1500 V DC (secondo EN 62208)
ACCESSORIES		Dispersible power A (W)	205
Surface-mounting brackets	GW46446-GW46451	Dispersible power B (W)	146
Kit for double insulation restore	GW46526		

DIMENSIONAL

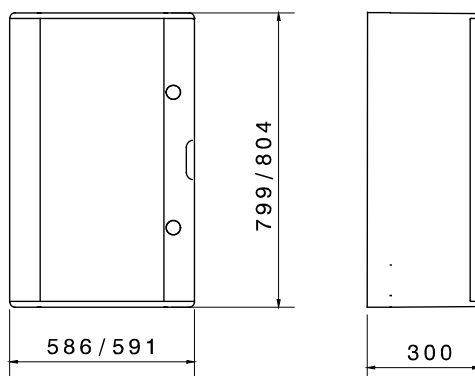

TECHNICAL SYMBOLOGY



Halogen-free in compliance with EN 60754-2



STANDARDS/APPROVALS

