




Range of Watertight surface-mounting boards made stainless steel material. In compliance with IEC 61439-1 (CEI 17/113), IEC 61439-2 (CEI 17/114), IEC 60670-1 (CEI 23/48), IEC 60670-24 (CEI 23/49) e IEC 62208 (CEI 17-87). Available in 3 sizes, transparent and black door versions with IP55 protection degree. Fast&Easy accessories, made in metal, allow the installation of modular devices and moulded-case circuit breakers up to 250A into the boards, reducing assembly times by up to 40%. Indicated for automation and distribution for indoor applications, in areas that are frequently cleaned with water jets.

|                                       |                                                           |                         |                                                                      |
|---------------------------------------|-----------------------------------------------------------|-------------------------|----------------------------------------------------------------------|
| Insulation class                      | Pre-arranged with earth terminal                          | Nominal dim. LxHxD (mm) | 310x425x160                                                          |
| IP degree                             | IP55                                                      | Material                | Stainless steel from 10/10 to 15/10 (e.g. AISI 304)                  |
| Mechanical resistance                 | IK10                                                      | No. locks               | 2                                                                    |
| No. of modules EN 50022               | 36 (12x3)                                                 | Application             | For indoor use, in areas that are frequently cleaned with water jets |
| Dispersible power A (W)               | 70                                                        | Dispersible power B (W) | 58                                                                   |
| Functional dim. LxHxD (mm)            | 310x425x160                                               | Operating temperature   | -25 +60 °C                                                           |
| Type of material                      | Stainless steel                                           | Electrocod              | 0320                                                                 |
| Standard                              | EN 61439-1, EN 61439-2, EN62208, EN 60670-1, IEC 60670-24 | Family                  | 46 QX                                                                |
| Maximum rated insulation voltage (Ui) | 690 V                                                     | Type of door            | Blank door                                                           |

## DIMENSIONAL

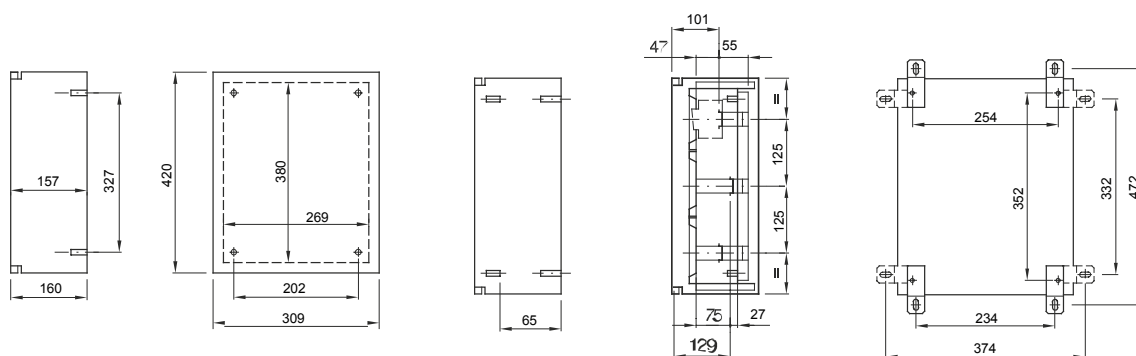

## TECHNICAL SYMBOLOGY

IP

IP55

IK

IK10



-25 +60 °C

## STANDARDS/APPROVALS

