




Hydrostatic submersible pressure transmitter

SUBMERSIBLE 0,25BAR 10M FEP CABLE

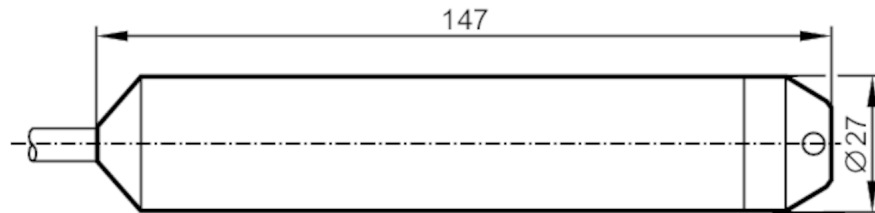

Application

Design	with capillary tube for pressure compensation	
Media	Liquids	
Medium temperature	[°C]	-10...85
Pressure rating	[bar]	2
Min. bursting pressure	[bar]	2.4
Type of pressure	relative pressure	

Electrical data

Operating voltage	[V]	10...30 DC
Protection class	III	
Reverse polarity protection	yes	

Outputs

Total number of outputs	1	
Output signal	analogue signal	
Number of analogue outputs	1	
Analogue current output	[mA]	4...20
Max. load	[Ω]	700; (U _b = 24 V; (U _b - 10 V) / 20 mA)
Short-circuit protection	yes	

Measuring/setting range

Measuring range	[bar]	0...0.25
-----------------	-------	----------

Accuracy / deviations

Repeatability	[% of the span]	< 0,1; (with temperature fluctuations < 10 K)
Characteristics deviation	[% of the span]	< 0,25 (BFSL) / 0,5; (incl. linearity, zero and span error (limit value setting))
Linearity deviation	[% of the span]	< 0,2 (BFSL)
Long-term stability	[% of the span]	< 0,2; (per year)
Temperature coefficient zero point	[% of the span / 10 K]	< ± 0,2; (0...50 °C)
Temperature coefficient span	[% of the span / 10 K]	< ± 0,2; (0...50 °C)

PS4408



Hydrostatic submersible pressure transmitter

SUBMERSIBLE 0,25BAR 10M FEP CABLE

Operating conditions

Ambient temperature	[°C]	-10...85
Storage temperature	[°C]	-30...80
Protection		IP 68

Mechanical data

Weight	[g]	996
Materials		stainless steel (1.4571/316Ti); PA


Remarks

Pack quantity		1 pcs.
---------------	--	--------

Electrical connection

Cable: 10 m, FEP, Ø 7.5 mm

Connection

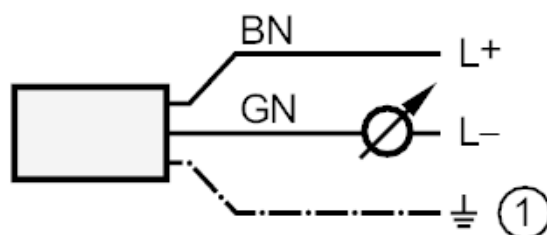

1: screen (connected to the housing)

Core colours :

BN = brown

GN = green