


PT3550



Pressure transmitter

PT-400-SBG14-A-ZVG/US/ IW

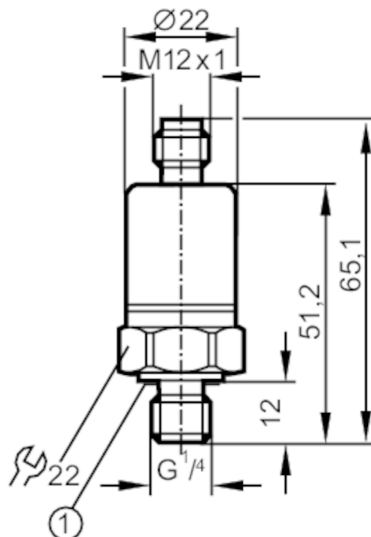

- 1 Sealing
Tightening torque 25 Nm



Application

Application	for mobile applications
Media	liquids and gases
Medium temperature [°C]	-25...90; (on request: -40...100 °C)
Pressure rating [bar]	600
Min. bursting pressure [bar]	1600
Type of pressure	relative pressure

Electrical data

Operating voltage [V]	8.5...36 DC
Min. insulation resistance [MΩ]	100; (80 V DC)
Protection class	III
Reverse polarity protection	yes

Inputs / outputs

Number of inputs and outputs	Number of analogue outputs: 1
------------------------------	-------------------------------

Outputs

Total number of outputs	1
Output signal	analogue signal
Number of analogue outputs	1
Analogue current output [mA]	4...20
Max. load [Ω]	775; (U _b = 24 V; (U _b - 8,5 V) / 20 mA)

Measuring/setting range

Measuring range [bar]	0...400
-----------------------	---------



Pressure transmitter

PT-400-SBG14-A-ZVG/US/ IW

Accuracy / deviations		
Repeatability	[% of the span]	$< \pm 0,1$; (with temperature fluctuations < 10 K)
Characteristics deviation	[% of the span]	$< \pm 1,0$; (incl. drift when overtightened, zero point and span error)
Linearity deviation	[% of the span]	$< \pm 0,25$ (BFSL) / $< \pm 0,5$ (LS)
Hysteresis deviation	[% of the span]	$< \pm 0,2$
Long-term stability	[% of the span]	$< \pm 0,1$; (per 6 months)
Temperature coefficient zero point	[% of the span / 10 K]	$< \pm 0,1$; (-25...90 °C)
Temperature coefficient span	[% of the span / 10 K]	$< \pm 0,1$; (-25...90 °C)
Response times		
Step response time analogue output	[ms]	8
Operating conditions		
Ambient temperature	[°C]	-25...90
Storage temperature	[°C]	-40...100
Protection		IP 67; IP 69K
Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	noise immunity	according to the automotive directive 1995/54/EC, 2004/104 EC, 2005/83/EC
	ISO 11452-2	100 V/m
	ISO 11452-4	100 mA / severity level 4
	ISO 7637-2	severity level 4
	radiation of interference	CISPR 25
	EN 61000-6-1	
	EN 61000-6-4	
Shock resistance	DIN IEC 68-2-27	50 g (11 ms)
Vibration resistance	DIN IEC 68-2-6	20 g (10...2000 Hz)
MTTF	[years]	1494
Mechanical data		
Weight	[g]	81.4
Materials		stainless steel (1.4404 / 316L); PA
Materials (wetted parts)		stainless steel (1.4404 / 316L); Sealing: FKM
Min. pressure cycles		50 million
Process connection		threaded connection G 1/4 external thread
Restrictor element integrated		yes

PT3550



Pressure transmitter

PT-400-SBG14-A-ZVG/US/ IW

Remarks

Remarks	BFSL = Best Fit Straight Line
	LS = limit value setting
Notes	discontinued article
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12



Connection

