


PY7002



Pressure sensor with display

PN-100-SGR14-KG /US/ /V

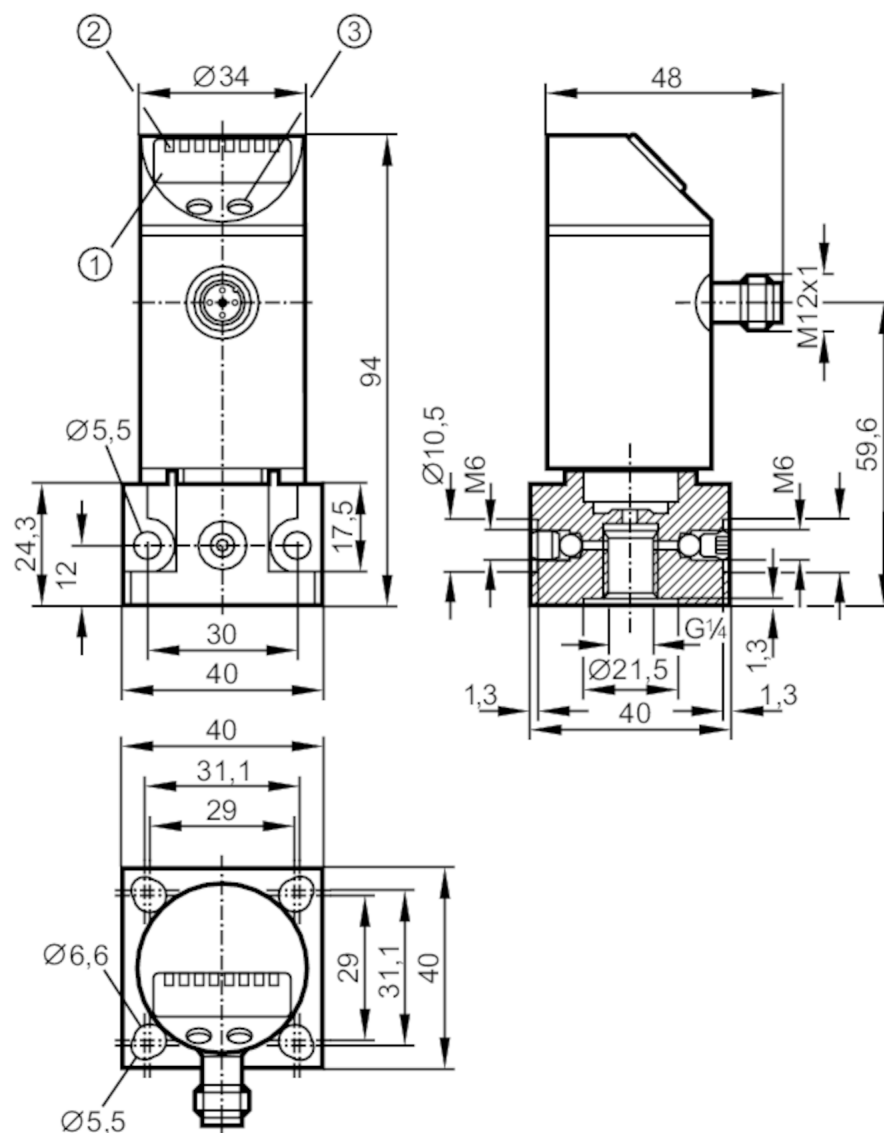

- 1 alphanumeric display 4-digit
- 2 LEDs Display unit / switching status
- 3 programming button



Application

Design	with flange adapter		
Media	liquids and gases		
Conditionally suitable for	use in gases at pressures > 25 bar only on request		
Medium temperature [°C]	-25...80		
Pressure rating	300 bar	4350 psi	30 MPa
Min. bursting pressure	650 bar	9400 psi	65 MPa
Type of pressure	relative pressure		



Pressure sensor with display

PN-100-SGR14-KG /US/ /V

Electrical data			
Operating voltage	[V]	18...36 DC; (according to EN 50178 SELV/PELV)	
Current consumption	[mA]	< 50	
Min. insulation resistance	[MΩ]	100; (500 V DC)	
Protection class		III	
Reverse polarity protection		yes	
Overvoltage protection		yes; (< 40 V)	
Power-on delay time	[s]	0.3	
Integrated watchdog		yes	
Inputs / outputs			
Number of inputs and outputs		Number of digital outputs: 2	
Outputs			
Total number of outputs		2	
Output signal		switching signal; IO-Link; (configurable)	
Electrical design		PNP/NPN	
Number of digital outputs		2	
Output function		normally open / normally closed; (parameterisable)	
Max. voltage drop switching output DC	[V]	2	
Permanent current rating of switching output DC	[mA]	250	
Switching frequency DC	[Hz]	< 170	
Short-circuit protection		yes	
Type of short-circuit protection		pulsed	
Measuring/setting range			
Measuring range		0...100 bar	0...1450 psi 0...10 MPa
Set point SP		1...100 bar	20...1450 psi 0.1...10 MPa
Reset point rP		0.5...99.5 bar	10...1440 psi 0.05...9.95 MPa
In steps of		0.5 bar	10 psi 0.05 MPa
Factory setting			SP1 = 25.0 bar rP1 = 23.0 bar
			SP2 = 75.0 bar rP2 = 73.0 bar
Accuracy / deviations			
Switch point accuracy [% of the span]		< ± 0,5	
Repeatability [% of the span]		< ± 0,1; (with temperature fluctuations < 10 K)	
Characteristics deviation [% of the span]		< ± 0,5; (linearity, incl. hysteresis and repeatability limit value setting to DIN 16086)	
Hysteresis deviation [% of the span]		< ± 0,25	
Long-term stability [% of the span]		< ± 0,05; (per 6 months)	
Temperature coefficient zero point [% of the span / 10 K]		0,2; (-20...80 °C)	
Temperature coefficient span		0,2; (-20...80 °C)	

PY7002



Pressure sensor with display

PN-100-SGR14-KG /US/ /V

[% of the span / 10 K]

Response times

Delay time programmable dS, dr	[s]	0; 0,2...50
--------------------------------	-----	-------------

Software / programming

Parameter setting options	hysteresis / window; normally open / normally closed; diagnostic function; switching logic; switch-on/switch-off delay; Damping; Display unit
---------------------------	---

Interfaces

Communication interface	IO-Link
Transmission type	COM2 (38,4 kBaud)
IO-Link revision	1.1
SDCI standard	IEC 61131-9 CDV
IO-Link device ID	309 d / 00 01 35 h
Profiles	no profile
SIO mode	yes
Required master port type	A
Process data analogue	1
Process data binary	2
Min. process cycle time	[ms] 2.3

Operating conditions

Ambient temperature	[°C]	-20...80
Storage temperature	[°C]	-40...100
Protection		IP 67

Tests / approvals

EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-5 Surge	0,5/1 kV
	EN 61000-4-6 HF conducted	10 V
Shock resistance	DIN IEC 68-2-27	50 g (11 ms)
Vibration resistance	DIN IEC 68-2-6	20 g (10...2000 Hz)

Mechanical data

Weight	[g]	379.2
Materials	stainless steel (1.4301 / 304); PC; PBT; PEI; FKM	
Materials (wetted parts)	steel (1.4104 / 430F); ceramics; FKM	
Min. pressure cycles	100 million	
Process connection	threaded connection G 1/4 internal thread internal threadM6	

Displays / operating elements

Display	Display unit	3 x LED, green
	switching status	2 x LED, yellow
	function display	alphanumeric display, 4-digit
	measured values	alphanumeric display, 4-digit

Remarks

Pack quantity	1 pcs.
---------------	--------

PY7002





Pressure sensor with display

PN-100-SGR14-KG /US/ /V

Electrical connection

Connector: 1 x M12; Contacts: gold-plated

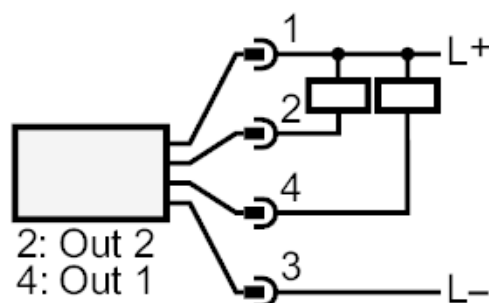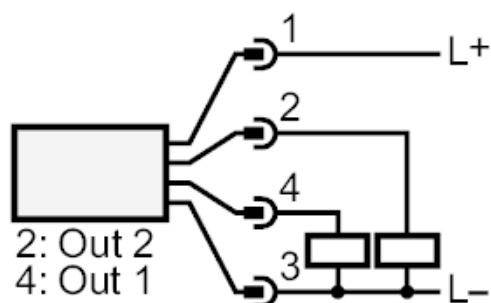

OUT1	switching output
OUT2	switching output
	Diagnostic output