


RC6007

Incremental encoder with solid shaft

RC-0150-I24/L2



Status Archive

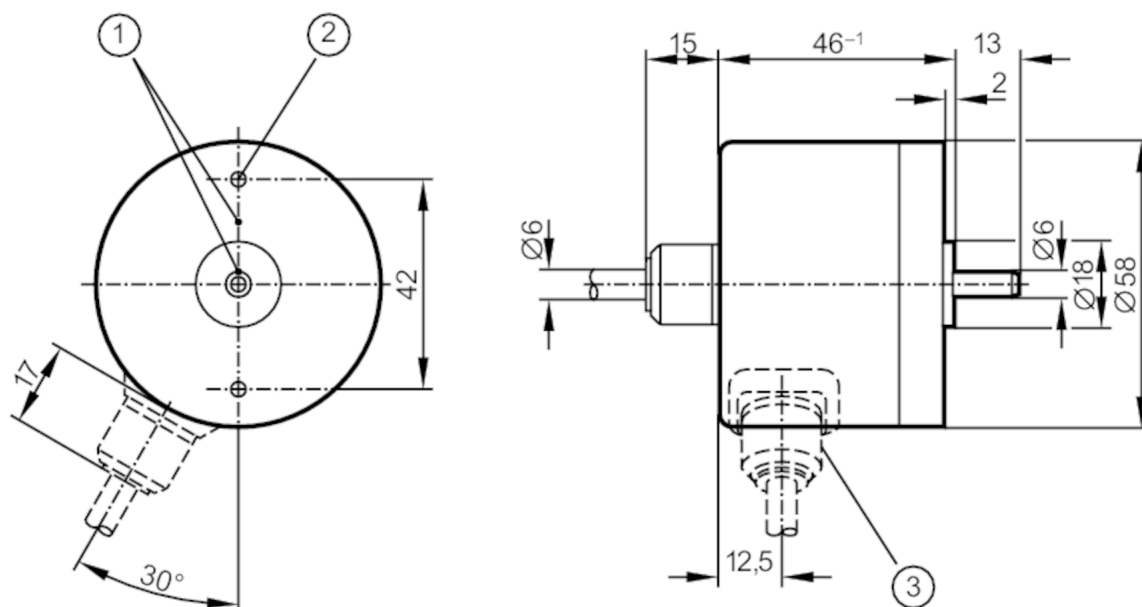

- 1 reference mark
- 2 M3 Depth 5 mm



Application

Function principle incremental

Electrical data

Operating voltage [V] 10...30 DC
Current consumption [mA] 150

Outputs

Electrical design HTL
Max. current load per output [mA] 50
Switching frequency [kHz] 300
Type of short-circuit protection < 60 s
Phase difference A und B [°] 90

Measuring/setting range

Resolution 150 resolution

Operating conditions


Ambient temperature [°C] -20...85
Storage temperature [°C] -30...100
Max. relative air humidity [%] 98
Protection IP 64

RC6007



Incremental encoder with solid shaft

RC-0150-I24/L2

Tests / approvals																										
Shock resistance		100 g (6 ms)																								
Vibration resistance		10 g (55...2000 Hz)																								
MTTF	[years]	190																								
Mechanical data																										
Weight	[g]	477.8																								
Dimensions	[mm]	Ø 58 / L = 46																								
Materials		aluminium																								
Max. revolution, mechanical	[U/min]	12000																								
Max. starting torque	[Nm]	1																								
Reference temperature torque	[°C]	20																								
Shaft design		solid shaft																								
Shaft diameter	[mm]	6																								
Shaft material		steel (1.4104)																								
Max. shaft load axial (at the shaft end)	[N]	10																								
Max. shaft load radial (at the shaft end)	[N]	20																								
Electrical connection																										
Cable: 2 m, PUR; axial																										
<table><tr><td>brown</td><td>A</td></tr><tr><td>green</td><td>A inverted</td></tr><tr><td>grey</td><td>B</td></tr><tr><td>pink</td><td>B inverted</td></tr><tr><td>red</td><td>0 index</td></tr><tr><td>black</td><td>0 index inverted</td></tr><tr><td>blue</td><td>L+ sensor</td></tr><tr><td>white</td><td>0V sensor</td></tr><tr><td>brown/green</td><td>L+ (Up)</td></tr><tr><td>white/green</td><td>0V (Un)</td></tr><tr><td>lilac</td><td>failure inverted</td></tr><tr><td>screen</td><td>housing</td></tr></table>			brown	A	green	A inverted	grey	B	pink	B inverted	red	0 index	black	0 index inverted	blue	L+ sensor	white	0V sensor	brown/green	L+ (Up)	white/green	0V (Un)	lilac	failure inverted	screen	housing
brown	A																									
green	A inverted																									
grey	B																									
pink	B inverted																									
red	0 index																									
black	0 index inverted																									
blue	L+ sensor																									
white	0V sensor																									
brown/green	L+ (Up)																									
white/green	0V (Un)																									
lilac	failure inverted																									
screen	housing																									
Diagrams and graphs																										
Pulse diagram	 Output A Output B 0 index																									

Status Archive