


RO1379

Incremental encoder with hollow shaft

RO-3600-IO5/N1U



Status Archive

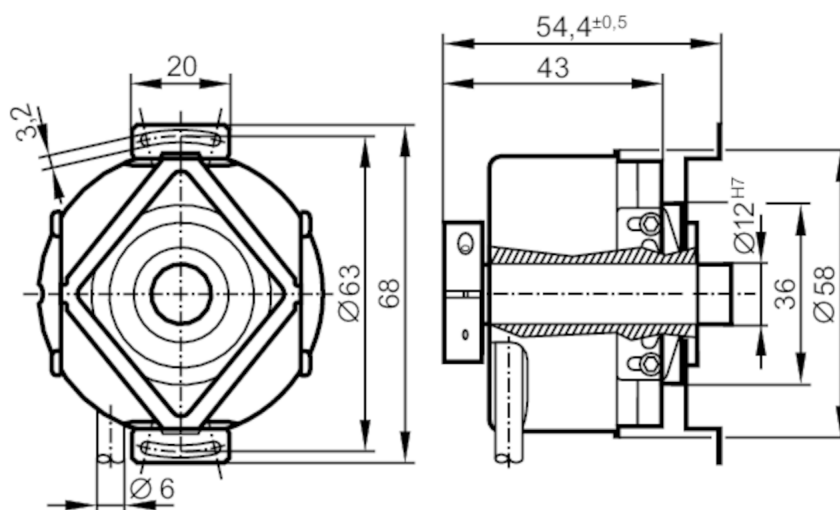

Application

Function principle	incremental
--------------------	-------------

Electrical data

Operating voltage tolerance	[%]	10
Operating voltage	[V]	5 DC
Current consumption	[mA]	< 150

Outputs

Electrical design		TTL
Max. current load per output	[mA]	20
Switching frequency	[kHz]	300
Phase difference A und B	[°]	90

Measuring/setting range

Resolution	3600 resolution
------------	-----------------

Operating conditions

Ambient temperature	[°C]	-30...100
Storage temperature	[°C]	-30...100
Max. relative air humidity	[%]	75; (briefly: 95 %; condensation not permissible)
Protection		IP 64

Tests / approvals

Shock resistance	100 g (6 ms)
Vibration resistance	30 g (55...2000 Hz)



Incremental encoder with hollow shaft

RO-3600-IO5/N1U

Mechanical data		
Weight	[g]	450.4
Dimensions	[mm]	Ø 58 / L = 54.4
Materials		aluminium
Max. revolution, mechanical	[U/min]	12000; (when using both shaft clamping rings)
Max. starting torque	[Nm]	2.5
Reference temperature torque	[°C]	20
Shaft design		continuous hollow shaft
Shaft diameter	[mm]	12
Shaft fit		H7
Shaft material		stainless steel
Installation depth of shaft	[mm]	15...24
Max. axial shaft misalignment	[mm]	1

Remarks	
Notes	discontinued article


Electrical connection

Cable: 1 m, PUR; radial

brown	A
green	A inverted
grey	B
pink	B inverted
red	0 index
black	0 index inverted
blue	L+ sensor
white	0V sensor
brown/green	L+ (Up)
white/green	0V (Un)
lilac	failure inverted
screen	housing

Diagrams and graphs

Pulse diagram



Output A

Output B

0 index

Status Archive