





Status Archive

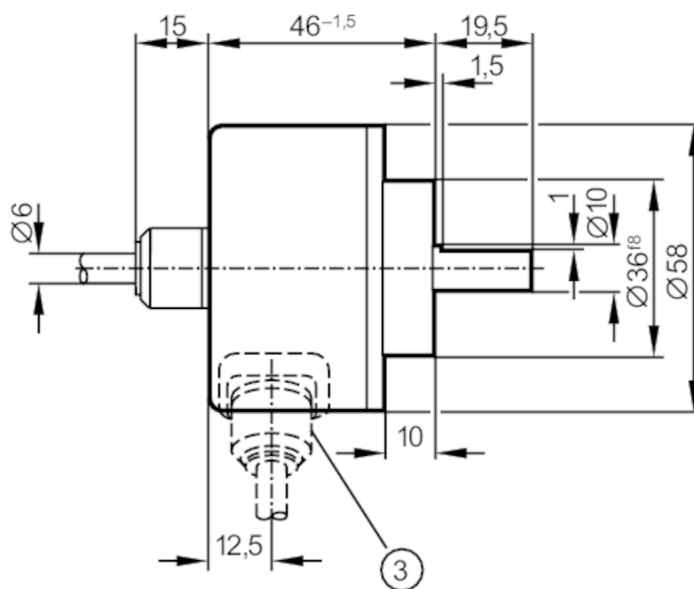

- | | |
|---|----------------|
| 1 | reference mark |
| 2 | M3 Depth 5 mm |

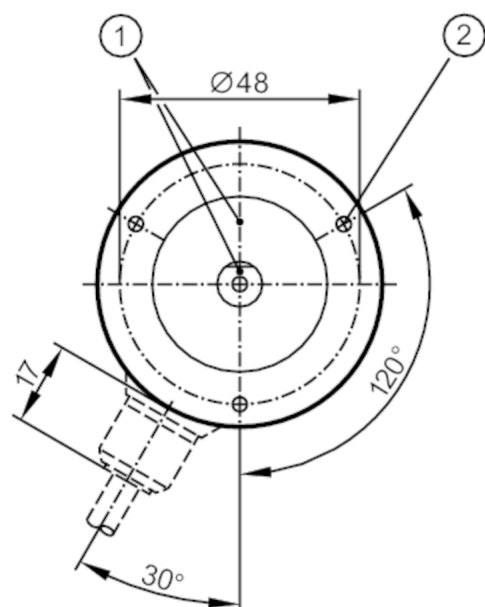

Application

Function principle	incremental
--------------------	-------------

Electrical data

Operating voltage tolerance	[%]	10
Operating voltage	[V]	5 DC
Current consumption	[mA]	150

Outputs

Electrical design	TTL
Max. current load per output [mA]	20
Switching frequency [kHz]	300
Phase difference A und B [°]	90

Measuring/setting range

Resolution	1000 resolution
------------	-----------------

Operating conditions

Ambient temperature	[°C]	-40...100
Max. relative air humidity	[%]	98
Protection		IP 64; (on the housing: IP 67; on the shaft: IP 64)

Tests / approvals

Shock resistance		100 g (6 ms)
Vibration resistance		10 g (55...2000 Hz)

RV1054



Incremental encoder with solid shaft

RV-1000-I05/P1

Mechanical data


Weight	[g]	469
Dimensions	[mm]	Ø 58 / L = 46
Materials		aluminium
Max. revolution, mechanical	[U/min]	12000
Max. starting torque	[Nm]	1
Reference temperature torque	[°C]	20
Shaft design		solid shaft
Shaft diameter	[mm]	10
Shaft material		steel (1.4104)
Max. shaft load axial (at the shaft end)	[N]	10
Max. shaft load radial (at the shaft end)	[N]	20

Electrical connection

Cable: 1 m, PUR; axial

1	B inverted
2	L+ sensor
3	0 index
4	0 index inverted
5	A
6	A inverted
screen	housing
7	failure inverted
8	B
9	not used
10	0V (Un)
11	0V sensor
12	L+

Connector: 1 x M23 (ifm 1001.1)



RV1054


Incremental encoder with solid shaft

RV-1000-I05/P1



Diagrams and graphs

Pulse diagram



Output A

Output B

0 index

Status Archive