



RV6086

Incremental encoder with solid shaft

RV-1000-I24/S



Status Archive

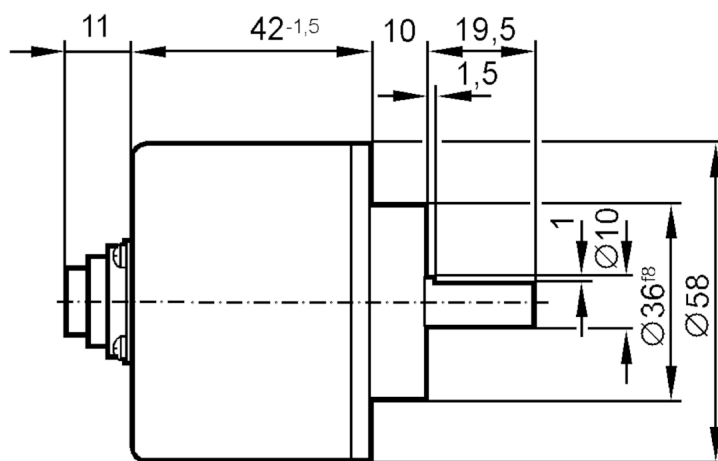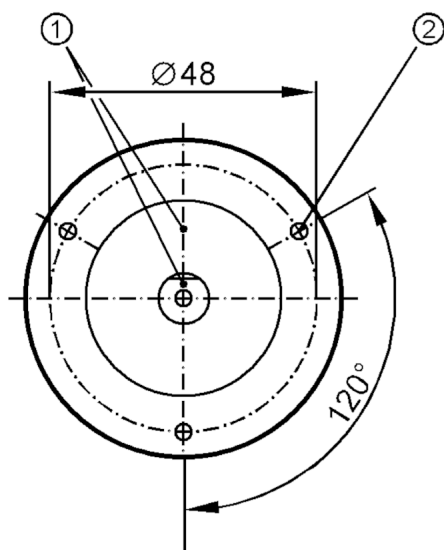

- 1 reference mark
- 2 M3 Depth 5 mm



Application

Function principle	incremental
--------------------	-------------

Electrical data

Operating voltage [V]	10...30 DC
Current consumption [mA]	155

Outputs

Electrical design	HTL
Max. current load per output [mA]	50
Switching frequency [kHz]	300
Type of short-circuit protection	< 60 s
Phase difference A und B [°]	90

Measuring/setting range

Resolution	1000 resolution
------------	-----------------

Operating conditions

Ambient temperature [°C]	-30...70
Storage temperature [°C]	-30...100
Max. relative air humidity [%]	98
Protection	IP 64



Incremental encoder with solid shaft

RV-1000-I24/S

Tests / approvals		
Shock resistance		100 g (11 ms)
Vibration resistance		10 g (58...2000 Hz)
MTTF	[years]	190
Mechanical data		
Weight	[g]	360
Dimensions	[mm]	Ø 58 / L = 82.5
Materials		aluminium
Max. revolution, mechanical	[U/min]	12000
Max. starting torque	[Nm]	1
Reference temperature torque	[°C]	20
Shaft design		solid shaft
Shaft diameter	[mm]	10
Shaft material		steel (1.4104)
Max. shaft load axial (at the shaft end)	[N]	10
Max. shaft load radial (at the shaft end)	[N]	20
Remarks		
Notes		discontinued article
Electrical connection		
1	L+	
2	A	
3	Screen housing	
4	B	
5	0 index	
6	0V	
Connector: 1 x M12, axial		

RV6086

Incremental encoder with solid shaft

RV-1000-I24/S



Diagrams and graphs

Pulse diagram



Output A

Output B

0 index

Status Archive