

SA1000


Flow monitor

SAM16BBD100G/W/US



Status Archive

/SA5000

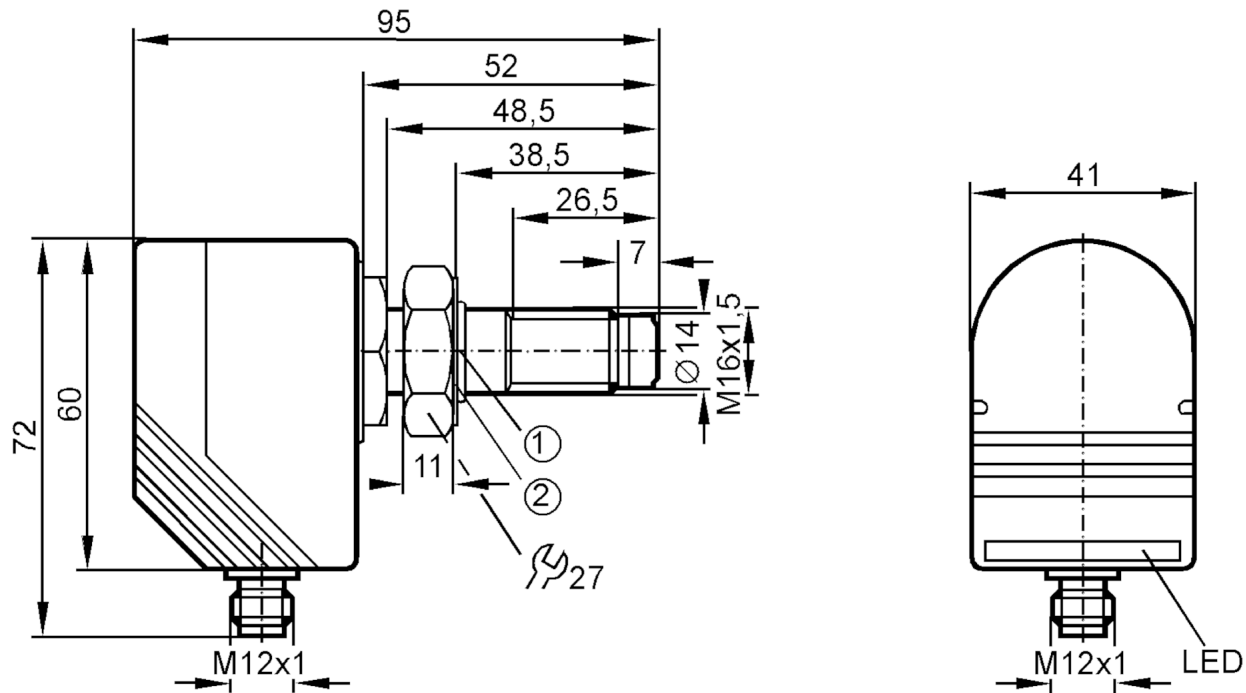

- 1 O-ring
- 2 compression washer



Application

Design	for pipes DN 40...DN 100
Media	water
Medien	Clean water without contamination and additives. Dirt/build-up on the sensor tip affects the measurement accuracy. Check the sensor tip for build-up from time to time. If necessary, clean with a soft cloth and a vinegar cleansing agent.
Medium temperature [°C]	0...80
Pressure rating [bar]	30

Electrical data

Operating voltage [V]	20...28 DC; (according to EN 50178 SELV/PELV)
Current consumption [mA]	< 80
Reverse polarity protection	yes
Power-on delay time [s]	15

SA1000



Flow monitor

SAM16BBD100G/W/US

Outputs		
Output signal		analogue signal
Analogue current output	[mA]	4...20; (linearised)
Max. load	[Ω]	500
Analogue voltage output	[V]	; (linearised)
Short-circuit protection		no
Overload protection		yes
Measuring/setting range		
Flow range	[cm/s]	3...150
Accuracy / deviations		
Temperature gradient	[K/min]	200
Measuring error		max. ± 10
	[% of the final value]	
Response times		
Response time	[s]	5; (10%...90%)
Operating conditions		
Ambient temperature	[°C]	-20...60
Protection		IP 67
Tests / approvals		
MTTF	[years]	389
Mechanical data		
Weight	[g]	268.8
Dimensions	[mm]	M16 x 1.5
Thread designation		M16 x 1.5
Materials		PBT-GF20
Materials (wetted parts)		stainless steel (1.4404 / 316L); stainless steel (1.4571/316Ti); O-ring: NBR 70 Shore A
Process connection		M16 x 1,5
Displays / operating elements		
Display	function	10 x LED, green Resolution 10 % of the final value
Remarks		
Notes		discontinued article
Pack quantity		1 pcs.
Electrical connection		

Connector: 1 x M12




SA1000

Flow monitor

SAM16BBD100G/W/US



Connection

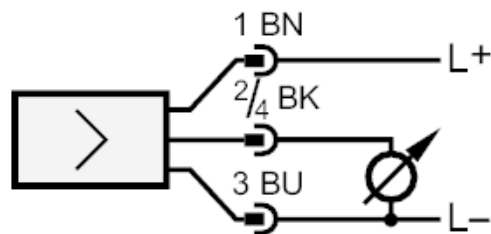

Core colours :

BN =	brown
BU =	blue
BK =	black
WH =	white

Status Archive

/SA5000