


SA5014



Flow sensor

SAD10XDB50KG/US-100

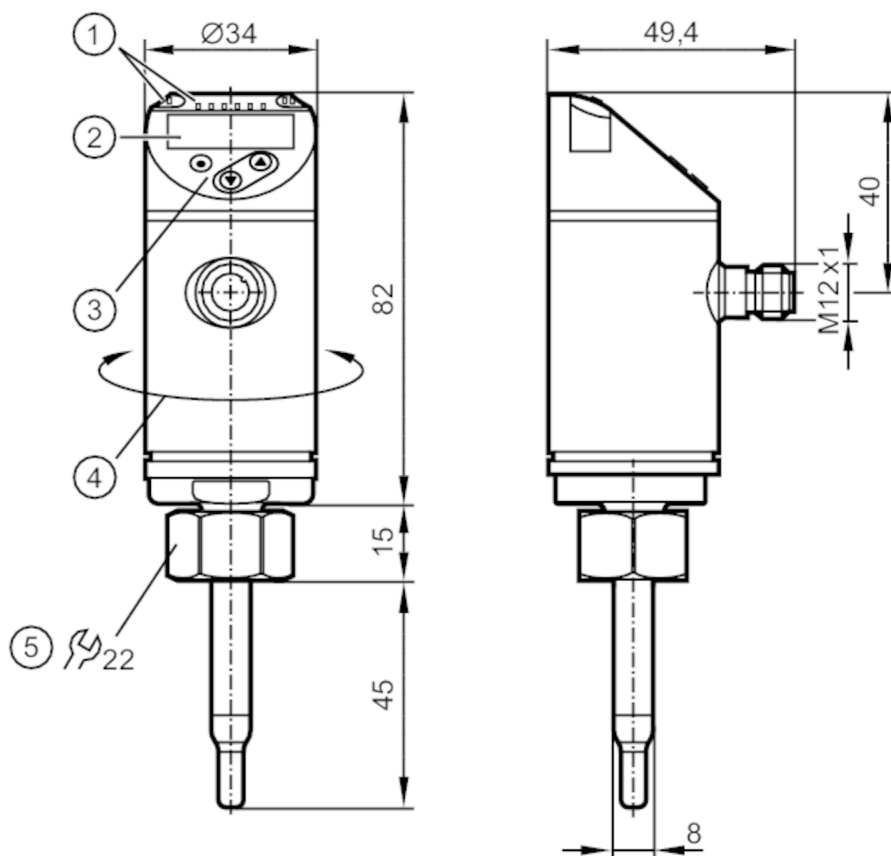

- 1 LEDs Display unit
- I, II not used
- 2 alphanumeric display 4-digit red/green
- 3 programming buttons
- 4 upper part of the housing can be rotated 345°



Application

Media	water; glycol solutions; air; oils
Medien	low-viscosity oils with viscosity: $\leq 40 \text{ mm}^2/\text{s}$ (104 °F)
	high-viscosity oils with viscosity: $> 40 \text{ mm}^2/\text{s}$ (104 °F)
Medium temperature [°F]	-4...194
Pressure rating [bar]	100

Electrical data

Operating voltage [V]	18...30 DC
Current consumption [mA]	< 100
Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	10



Flow sensor

SAD10XDB50KG/US-100


Outputs		
Total number of outputs		2
Output signal		analogue signal
Number of analogue outputs		2
Analogue current output [mA]		4...20; (scalable)
Max. load [Ω]		350
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes
Measuring/setting range		
Probe length L [mm]		45
Operating mode		relative; absolutely liquid; absolutely gaseous
Note on setting range		Operating mode: relative
Liquids		
Measuring range [ft/s]		0.15...9.85
Resolution [ft/s]		0.05
Setting range [ft/s]		0...19.5
Analogue start point ASP [ft/s]		0...7.95
Analogue end point AEP [ft/s]		1.9...9.85
Gases		
Measuring range [ft/s]		6...328
Resolution [ft/s]		2
Setting range [ft/s]		0...656
Analogue start point ASP [ft/s]		0...264
Analogue end point AEP [ft/s]		64...328
Temperature monitoring		
Measuring range [°F]		-4...194
Resolution [°F]		0.5
Analogue start point [°F]		-4...169
Analogue end point [°F]		39...212
In steps of [°F]		0.5
Accuracy / deviations		
Flow monitoring		
Temperature drift [cm/s x 1/K]		0,01 fps x 1/K (< 68 °F; > 158 °F)
Temperature gradient [K/min]		100
Accuracy (in the measuring range)		$\pm (7 \% MW + 2 \% MEW)$; (for relative mode in the measuring range with:; water: 68...158 °F; inlet length: 5 ft; DN25 (DIN 2448); mounting position according to instructions; Accuracy can differ for other media and mounting positions.)
Repeatability		0,05 m/s; (water; flow velocity: 0,05...3 m/s)
Temperature monitoring		
Temperature drift		$\pm 0,003 \text{ K/}^\circ\text{F}$
Accuracy [K]		$\pm 0,3 / \pm 1$; (water; flow velocity: 1...9,85 fps / air; flow velocity: > 32,8 fps)

SA5014



Flow sensor

SAD10XDB50KG/US-100

Response times		
Flow monitoring		
Response time	[s]	0.5; (T09; water; glycol: 0,8 s; air: 7 s; oil: 1,8 s; each T09)
Temperature monitoring		
Dynamic response T05 / T09	[s]	1,5 (T09); (water; flow velocity: 0,3...3 m/s)
Software / programming		
Parameter setting options	medium selection; Damping; Teach function; display can be rotated and switched off; standard unit of measurement; process value colour	
Operating conditions		
Ambient temperature	[°F]	-40...176
Storage temperature	[°F]	-40...212
Protection	IP 65; IP 67	
Tests / approvals		
EMC	DIN EN 60947-5-9	
Shock resistance	DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF	[years]	179
UL approval	UL Approval no.	I004
Mechanical data		
Weight	[g]	275
Materials	stainless steel (1.4404 / 316L); stainless steel (1.4310 / 301); PBT-GF20; PBT-GF30	
Materials (wetted parts)	stainless steel (1.4404 / 316L); Gasket: FKM	
Process connection	threaded connection M18 x 1,5 internal thread	
Displays / operating elements		
Display	Display unit	6 x LED, green (% , m/s, l/min, m³/h, °C, 10³)
	measured values	alphanumeric display, red/green 4-digit
Remarks		
Remarks	MW = measured value	
	MEW = Final value of the measuring range	
Pack quantity	1 pcs.	
Electrical connection		
Connector: 1 x M12; Contacts: gold-plated		
		

SA5014



Flow sensor

SAD10XDB50KG/US-100

Connection



colours to DIN EN 60947-5-2

OUT1: analogue output Temperature monitoring

OUT2: analogue output volumetric flow quantity monitoring

Core colours :

BK = black

BN = brown

BU = blue

WH = white