


Flow sensor with integrated backflow prevention

SBY34BF0BPKG/US



1: Rp 3/4

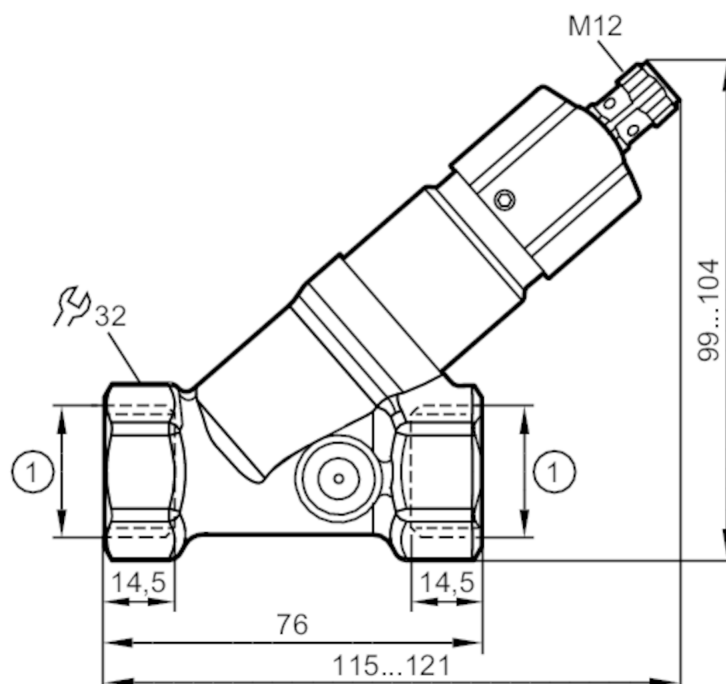

Application

Media	Liquids; water; glycol solutions; oils; coolants	
Medium temperature	[°C]	0...85
Pressure rating	[bar]	40

Electrical data

Operating voltage	[V]	10...30 DC; (to SELV/PELV)
Current consumption	[mA]	< 15
Protection class		III
Reverse polarity protection		yes

Inputs / outputs

Number of inputs and outputs	Number of digital outputs: 1
------------------------------	------------------------------

Outputs

Total number of outputs	1
Output signal	switching signal
Electrical design	PNP
Number of digital outputs	1
Output function	normally open
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	100
Short-circuit protection	yes
Overload protection	yes

SBY334



Flow sensor with integrated backflow prevention


SBY34BF0BPKG/US

Measuring/setting range		
Setting range	[l/min]	2...50
Accuracy / deviations		
Repeatability		1
	[% of the final value]	
Hysteresis	[l/min]	1...3
Measuring error		± 5
	[% of the final value]	
Response times		
Response time	[s]	< 0.01
Operating conditions		
Ambient temperature	[°C]	0...60
Storage temperature	[°C]	-15...80
Protection		IP 65; IP 67
Tests / approvals		
EMC	DIN EN 61000-6-2	
	DIN EN 61000-6-3	
Shock resistance	DIN EN 60068-2-27	20 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	5 g (10...2000 Hz)
MTTF	[years]	15.78
Mechanical data		
Weight	[g]	472.5
Materials	brass chemically nickel-plated; PP; aluminium anodised; PA	
Materials (wetted parts)	stainless steel (1.4310 / 301); stainless steel (1.4301 / 304); PBT; brass chemically nickel-plated; PP; PPS; Polyolefin; O-ring: FKM	
Process connection	Rp 3/4	
Switching cycles mechanical	10 million	
Displays / operating elements		
Display	switching status	4 x LED, yellow
Accessories		
Accessories (supplied)	Allen key	
Remarks		
Remarks	Caution Do not turn the cap beyond the maximum value of the setting range.	
	All data refer to water (20 °C).	
Pack quantity	1 pcs.	
Electrical connection		
Connector: 1 x M12		
		

Flow sensor with integrated backflow prevention

SBY34BF0BPKG/US

Connection

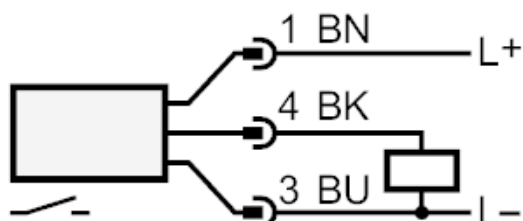


colours to DIN EN 60947-5-2

Core colours :

BK = black
BN = brown
BU = blue

Diagrams and graphs

Pressure loss

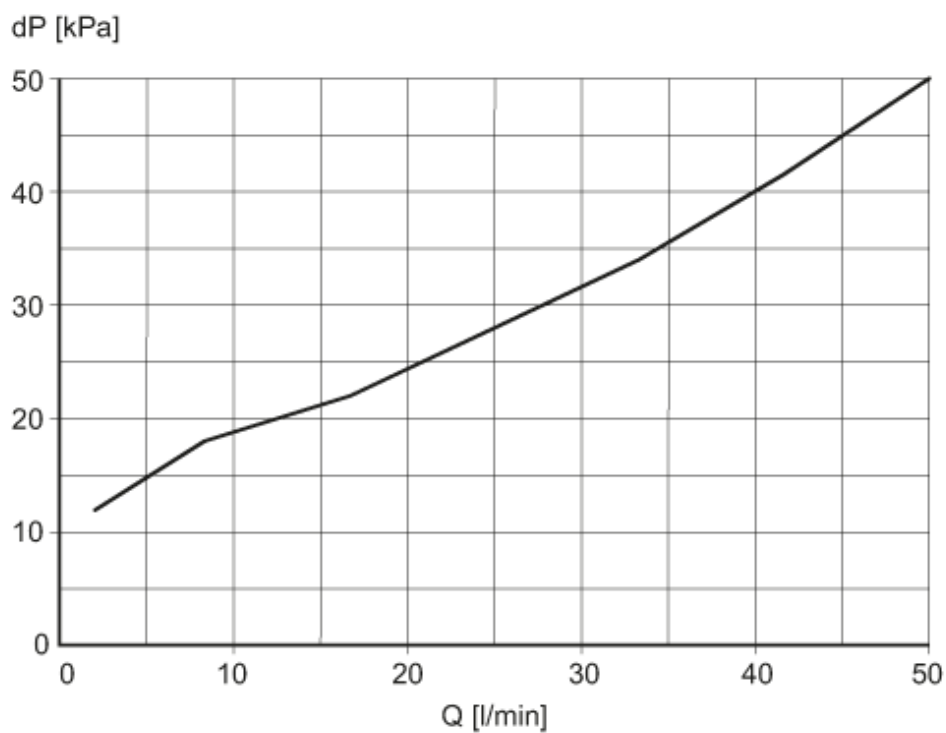

dP Pressure loss

Q volumetric flow quantity