


Flow monitor

SCN14HBBAKOA



1 Tightening torque < 50 Nm with stainless steel adapter / ANSI B1.20.1

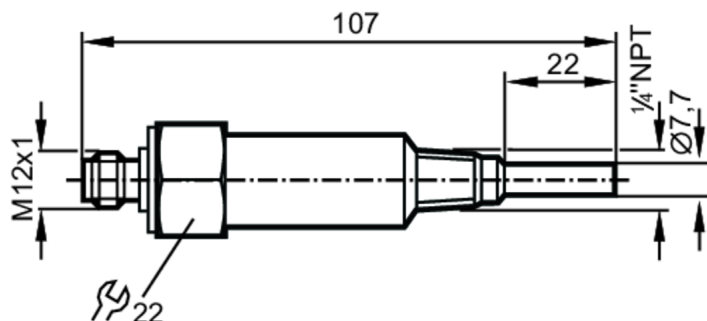

Application

Media	water
Medium temperature [°C]	-10...80; (In case of medium temperatures < 4 °C the data refer to water / glycol (40 % glycol).)
Pressure rating [bar]	30

Electrical data

Operating voltage tolerance [%]	-15...15
Operating voltage [V]	< 24 AC / 24 DC; (according to EN 50178 SELV/PELV)
Current consumption [mA]	< 50
Protection class	III
Power-on delay time [s]	15

Inputs / outputs

Number of inputs and outputs	Number of digital outputs: 1
------------------------------	------------------------------

Outputs

Total number of outputs	1
Output signal	switching signal
Number of digital outputs	1
Output function	normally open
Max. voltage drop switching output DC [V]	0.8
Permanent current rating of switching output DC [mA]	80
Contact rating	30 V AC / 42 V DC; (according to EN 50178 SELV/PELV)
Short-circuit protection	no
Overload protection	no

Measuring/setting range

Note on factory setting	for water (20 °C) and mounting in 2" pipe
Note on switch point	in steps of 5 cm/s

Response times

Response time [s]	1...10
-------------------	--------

Software / programming

Parameter setting options	switch point can be set via programming wire
---------------------------	--




Flow monitor

SCN14HBBAKOA

Operating conditions		
Ambient temperature	[°C]	-20...70
Storage temperature	[°C]	-40...70
Protection		IP 67
Tests / approvals		
Shock resistance	DIN IEC 68-2-27	50 g (11 ms)
Vibration resistance	DIN IEC 68-2-6	20 g (10...2000 Hz)
Mechanical data		
Weight	[g]	139.4
Materials		stainless steel (1.4404 / 316L)
Materials (wetted parts)		stainless steel (1.4404 / 316L)
Process connection		1/4 NPT
Electrical connection		
Required protection		miniature fuse to IEC60127-2 sheet 1; ≤ 2 A; fast acting
Remarks		
Pack quantity		1 pcs.

Electrical connection


Connector: 1 x M12



Flow monitor

SCN14HBBAKOA

Connection

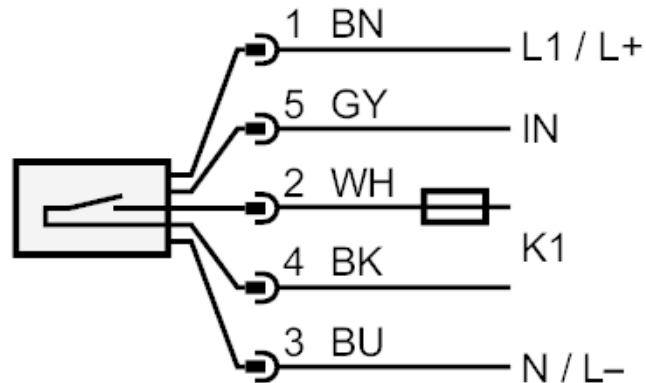

IN: programming input

K1: relay

Note miniature fuse to IEC60127-2 sheet 1 ≤ 2 A fast acting

K1: colours to DIN EN 60947-5-2

Core colours :

BK = black

BN = brown

BU = blue

GY = grey

WH = white