


SF5350



Flow sensor for connection to an evaluation unit

SFD10ADB /6M

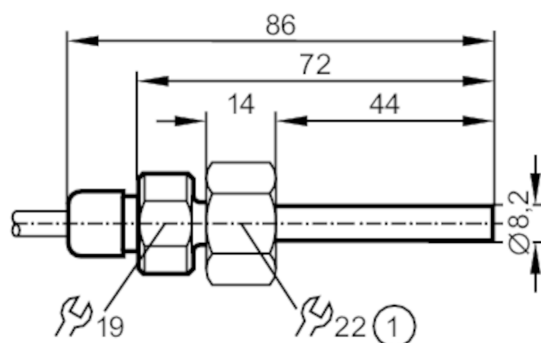

1 Internal thread M18 x 1;5



Application

Application	high-temperature range
Media	Liquids; Gases
Medium temperature [°C]	-25...80
Pressure rating [bar]	300

Liquids

Application	high-temperature range
Medium temperature [°C]	-25...80

Gases

Medium temperature [°C]	-25...80
-------------------------	----------

Electrical data

Connection to control monitor	VS3000
-------------------------------	--------

Measuring/setting range

Probe length L [mm]	45
---------------------	----

Liquids

Setting range [cm/s]	3...300
Greatest sensitivity [cm/s]	3...60

Gases

Setting range [cm/s]	200...3000
Greatest sensitivity [cm/s]	200...800

Accuracy / deviations

Temperature gradient [K/min]	300
------------------------------	-----

Response times

Response time [s]	1...10
-------------------	--------

Liquids

Response time [s]	1...10
-------------------	--------

Gases

Response time [s]	1...10
-------------------	--------


SF5350



Flow sensor for connection to an evaluation unit

SFD10ADB /6M

Operating conditions		
Protection	IP 67	
Tests / approvals		
Shock resistance	DIN IEC 68-2-27	40 g (11 ms)
Vibration resistance	DIN IEC 68-2-6	10 g (55...2000 Hz)
MTTF [years]	8213	
Mechanical data		
Weight [g]	401	
Housing	for adapter	
Dimensions [mm]	M18 x 1.5	
Thread designation	M18 x 1.5	
Materials	stainless steel (1.4404 / 316L)	
Materials (wetted parts)	stainless steel (1.4404 / 316L); O-ring: FKM 80 Shore A	
Process connection	M18 x 1,5 internal thread	
Remarks		
Pack quantity	1 pcs.	
Electrical connection		
Cable: 6 m, PUR; Maximum cable length: 100 m; 5 x 0.34 mm²		
Connection		

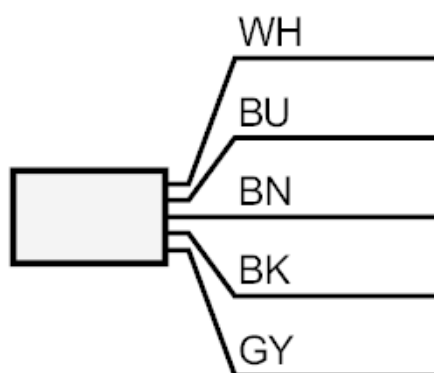

Core colours :

BN =	brown
BU =	blue
BK =	black
WH =	white
GY =	grey