


SF6201



Flow sensor for connection to an evaluation unit

SFG10ABB /US-100

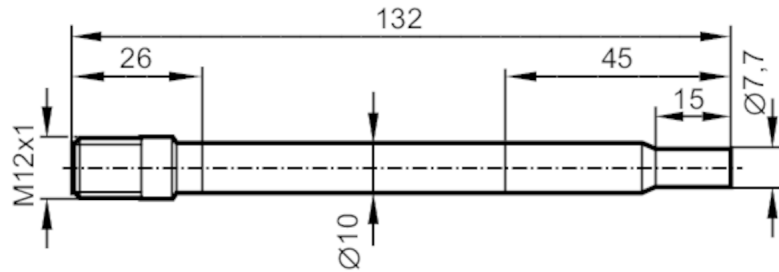

Reg31

Application

Application	high-temperature range
Installation	sensor suitable for clamp fitting
Media	Liquids; Gases
Medium temperature [°C]	-25...80
Pressure rating [bar]	30

Liquids

Application	high-temperature range
Installation	sensor suitable for clamp fitting
Medium temperature [°C]	-25...80

Gases

Medium temperature [°C]	-25...80
-------------------------	----------

Electrical data

Connection to control monitor	VS3000
-------------------------------	--------

Measuring/setting range

Probe length L [mm]	15...107
---------------------	----------

Liquids

Setting range [cm/s]	3...300
Greatest sensitivity [cm/s]	3...60

Gases

Setting range [cm/s]	200...3000
Greatest sensitivity [cm/s]	200...800

Accuracy / deviations

Temperature gradient [K/min]	30
------------------------------	----

Response times

Response time [s]	1...10
-------------------	--------

Liquids

Response time [s]	1...10
-------------------	--------

Gases

Response time [s]	1...10
-------------------	--------

Operating conditions

Protection	IP 67
------------	-------

SF6201



Flow sensor for connection to an evaluation unit

SFG10ABB /US-100

Tests / approvals		
Shock resistance	DIN IEC 68-2-27	40 g (11 ms)
Vibration resistance	DIN IEC 68-2-6	10 g (55...2000 Hz)
MTTF [years]	8393.77	


Mechanical data		
Weight [g]	61.6	
Materials	stainless steel (1.4404 / 316L) several parts, welded	
Materials (wetted parts)	stainless steel (1.4404 / 316L) several parts, welded	
Process connection	D10	

Accessories		
Accessories (optional)	Clamp adapter: R 1/2, E40160	
	Clamp adapter: 1/2" NPT, E40174	


Remarks		
Pack quantity	1 pcs.	

Electrical connection

Connector: 1 x M12; Contacts: gold-plated; Maximum cable length: 100 m



Connection

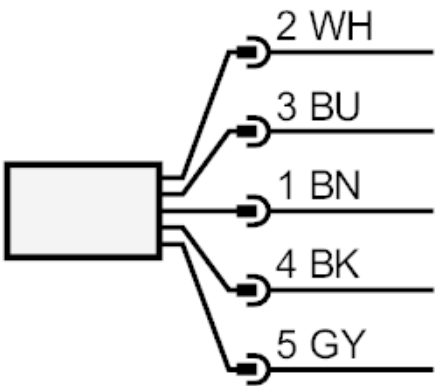

Core colours :	
BN =	brown
BU =	blue
BK =	black
WH =	white
GY =	grey