



# CFP0800-XPBNNCT

CFP Cubic

LEVEL SENSORS

**SICK**  
Sensor Intelligence.



Illustration may differ



IO-Link



## Ordering information

| Type            | Part no. |
|-----------------|----------|
| CFP0800-XPBNNCT | 1090875  |

Other models and accessories → [www.sick.com/CFP\\_Cubic](http://www.sick.com/CFP_Cubic)

## Detailed technical data

### Features

|                            |                             |
|----------------------------|-----------------------------|
| <b>Medium</b>              | Water and oil-based liquids |
| <b>Measurement</b>         | Switch, Continuous          |
| <b>Probe length</b>        | 800 mm                      |
| <b>Process pressure</b>    | -0.5 bar ... 3 bar          |
| <b>Process temperature</b> | -20 °C ... +80 °C           |
| <b>UL approval</b>         | ✓                           |
| <b>RoHS certificate</b>    | ✓                           |
| <b>IO-Link</b>             | ✓                           |

### Performance

|                                         |                                                        |
|-----------------------------------------|--------------------------------------------------------|
| <b>Accuracy of sensor element</b>       | ± 15 mm (with water or oil under reference conditions) |
| <b>Reproducibility</b>                  | < 5 mm                                                 |
| <b>Resolution</b>                       | < 2 mm                                                 |
| <b>Response time</b>                    | < 300 ms                                               |
| <b>Dielectricity constant</b>           | ≥ 2                                                    |
| <b>Conductivity</b>                     | No limitation                                          |
| <b>Deactivated area at end of probe</b> | 7 mm ... 15 mm, Depending on probe length              |
| <b>Temperature measurement</b>          |                                                        |
| Measuring range (temperature)           | -20 °C ... +80 °C                                      |
| Accuracy (temperature)                  | ± 2 °C                                                 |
| Resolution (Temperature)                | ≤ 0.1 °C                                               |
| Response time (temperature)             | 120 s                                                  |

## Electronics

|                                    |                                                                                                                                                                          |
|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Supply voltage</b>              | 10 V DC ... 30 V DC <sup>1)</sup>                                                                                                                                        |
| <b>Power consumption</b>           | ≤ 100 mA at 24 V DC without output load                                                                                                                                  |
| <b>Initialization time</b>         | ≤ 4 s                                                                                                                                                                    |
| <b>Protection class</b>            | III                                                                                                                                                                      |
| <b>Connection type</b>             | M12 round connector x 1, 8-pin                                                                                                                                           |
| <b>Output signal</b>               | 4 x PNP/NPN/push-pull transistor outputs switchable and 2 x analog outputs 4 mA ... 20 mA, 0 V ... 10 V depending on output load or output voltage depending on the load |
| <b>Output load</b>                 | 4 mA ... 20 mA < 500 Ohm at U <sub>v</sub> > 15 V, 4 mA ... 20 mA < 350 Ohm at U <sub>v</sub> > 12 V, 0 V ... 10 V > 750 Ohm at U <sub>v</sub> 14 ≥ V                    |
| <b>Hysteresis</b>                  | Min. 3 mm, min. 2 °C, free adjustable                                                                                                                                    |
| <b>Signal voltage HIGH</b>         | U <sub>v</sub> -3 V                                                                                                                                                      |
| <b>Signal voltage LOW</b>          | < 3 V                                                                                                                                                                    |
| <b>Output current</b>              | < 100 mA                                                                                                                                                                 |
| <b>Inductive load</b>              | < 1 H                                                                                                                                                                    |
| <b>Capacitive load</b>             | 100 nF                                                                                                                                                                   |
| <b>Enclosure rating</b>            | IP65 / IP67                                                                                                                                                              |
| <b>Temperature drift</b>           | < 0.1 mm/K                                                                                                                                                               |
| <b>Lower signal level</b>          | 3.8 mA ... 4 mA                                                                                                                                                          |
| <b>Upper signal level</b>          | 20 mA ... 20.5 mA                                                                                                                                                        |
| <b>Resolution of analog output</b> | 12 bit                                                                                                                                                                   |

<sup>1)</sup> All connections are polarity protected. All outputs are overload and short-circuit protected.

## Mechanics

|                           |                                                                                 |
|---------------------------|---------------------------------------------------------------------------------|
| <b>Wetted parts</b>       | Outer tube: polypropylene (PP-H), G ¾" and ¾" NPT: PPSU, Easy-clamp bracket: PP |
| <b>Process connection</b> | ¾" NPT                                                                          |
| <b>Housing material</b>   | PBT / PC                                                                        |
| <b>Max. probe load</b>    | ≤ 4 Nm                                                                          |
| <b>Probe diameter</b>     | 16 mm                                                                           |

## Ambient data


|                                      |                   |
|--------------------------------------|-------------------|
| <b>Ambient operating temperature</b> | -20 °C ... +60 °C |
| <b>Ambient storage temperature</b>   | -40 °C ... +80 °C |

## Classifications

|                     |          |
|---------------------|----------|
| <b>ECI@ss 5.0</b>   | 27200503 |
| <b>ECI@ss 5.1.4</b> | 27200503 |
| <b>ECI@ss 6.0</b>   | 27200503 |
| <b>ECI@ss 6.2</b>   | 27200503 |
| <b>ECI@ss 7.0</b>   | 27200503 |
| <b>ECI@ss 8.0</b>   | 27200503 |
| <b>ECI@ss 8.1</b>   | 27200503 |
| <b>ECI@ss 9.0</b>   | 27200503 |
| <b>ECI@ss 10.0</b>  | 27200503 |


|                       |          |
|-----------------------|----------|
| <b>ECI@ss 11.0</b>    | 27200503 |
| <b>ETIM 5.0</b>       | EC001447 |
| <b>ETIM 6.0</b>       | EC001447 |
| <b>ETIM 7.0</b>       | EC001447 |
| <b>UNSPSC 16.0901</b> | 41113710 |

## Type code


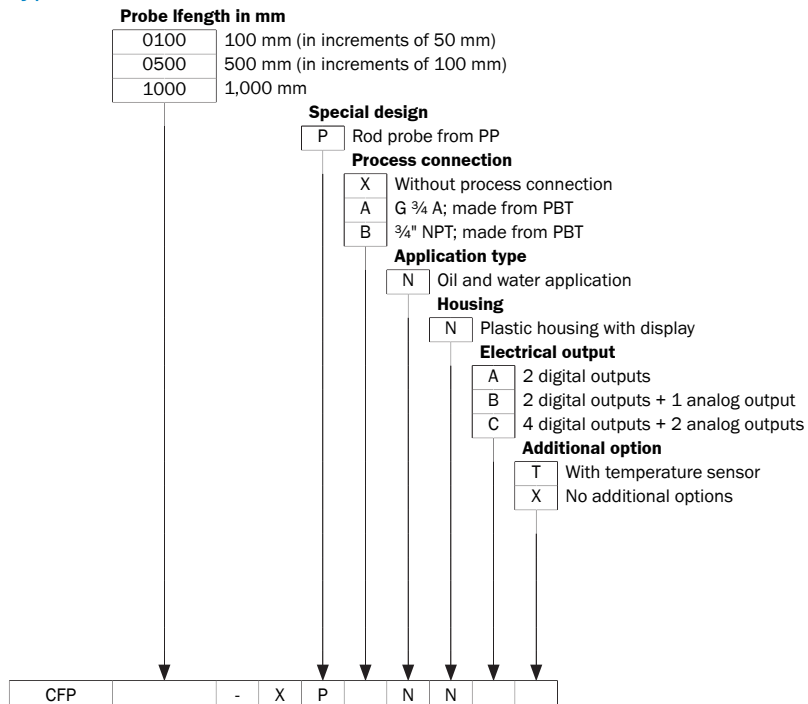


Not all variants of the type code can be combined!

## Dimensional drawing (Dimensions in mm (inch))

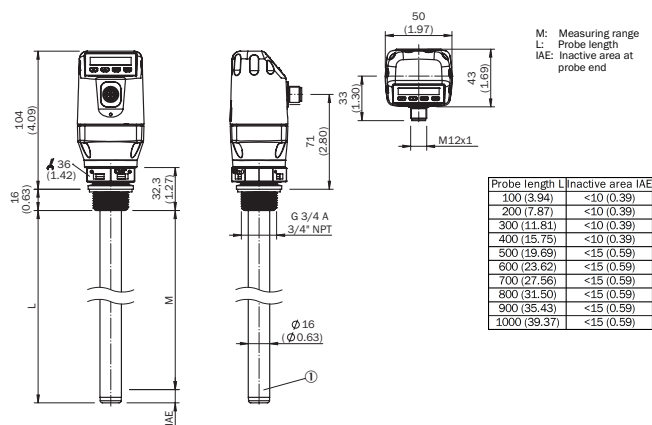

## Connection type

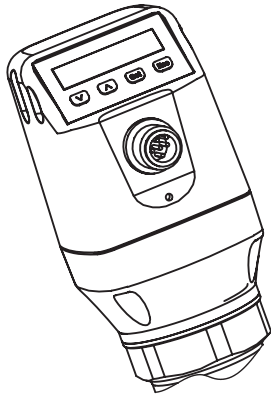

- ① L<sup>+</sup>: Supply voltage
- ② Q<sub>2</sub>: Switching output 2, PNP/NPN/DRV (Push-Pull)
- ③ M: Ground, reference ground for current-/voltage output
- ④ C/Q1: Switching output 2, PNP/NPN/DRV (Push-Pull) / IO-Link
- ⑤ Q<sub>3</sub>: Switching output 3, PNP/NPN/DRV (Push-Pull)
- ⑥ Q<sub>4</sub>: Switching output 4, PNP/NPN/DRV (Push-Pull)
- ⑦ Q<sub>A</sub>: Analog current-/voltage output
- ⑧ Q<sub>B</sub>: Analog current-/voltage output

## Recommended accessories

Other models and accessories → [www.sick.com/CFP\\_Cubic](http://www.sick.com/CFP_Cubic)

|                                                                                     | Brief description                                                                                                                                    | Type               | Part no. |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------|
| Plug connectors and cables                                                          |                                                                                                                                                      |                    |          |
|  | Head A: female connector, M12, 8-pin, straight, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 2 m  | YF2A18-020UA5XLEAX | 2095652  |
|                                                                                     | Head A: female connector, M12, 8-pin, straight, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 5 m  | YF2A18-050UA5XLEAX | 2095653  |
|                                                                                     | Head A: female connector, M12, 8-pin, straight, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 10 m | YF2A18-100UA5XLEAX | 2095654  |
|  | Head A: female connector, M12, 8-pin, straight, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PVC, shielded, 2 m                  | YF2A28-020VA6XLEAX | 2096243  |
|                                                                                     | Head A: female connector, M12, 8-pin, straight, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PVC, shielded, 5 m                  | YF2A28-050VA6XLEAX | 2096244  |
|                                                                                     | Head A: female connector, M12, 8-pin, straight, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PVC, shielded, 10 m                 | YF2A28-100VA6XLEAX | 2096245  |
|  | Head A: female connector, M12, 8-pin, angled, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 2 m    | YG2A18-020UA5XLEAX | 2095779  |
|                                                                                     | Head A: female connector, M12, 8-pin, angled, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 5 m    | YG2A18-050UA5XLEAX | 2095780  |

|                                                                                   | Brief description                                                                                                                                  | Type               | Part no. |
|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------|
|  | Head A: female connector, M12, 8-pin, angled, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 10 m | YG2A18-100UA5XLEAX | 2095781  |
|                                                                                   | Head A: female connector, M12, 8-pin, angled, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PVC, shielded, 2 m                  | YG2A28-020VA6XLEAX | 2096218  |
|                                                                                   | Head A: female connector, M12, 8-pin, angled, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PVC, shielded, 5 m                  | YG2A28-050VA6XLEAX | 2096219  |

### Recommended services

Additional services → [www.sick.com/CFP\\_Cubic](https://www.sick.com/CFP_Cubic)

|                                                                                                                                                                                                                                                                                                                                                        | Type                   | Part no.   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------------|
| Function Block Factory                                                                                                                                                                                                                                                                                                                                 |                        |            |
| <ul style="list-style-type: none"> <li><b>Description:</b> The Function Block Factory supports common programmable logic controllers (PLCs) from various manufacturers, such as Siemens, Beckhoff, Rockwell Automation and B&amp;R. More information on the FBF can be found <a href="https://fbf.cloud.sick.com target='_blank'">here</a>.</li> </ul> | Function Block Factory | On request |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

**For us, that is “Sensor Intelligence.”**

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)