



# WTB26I-24162122A00

## W26

COMPACT PHOTOELECTRIC SENSORS

**SICK**  
Sensor Intelligence.



Illustration may differ



## Ordering information

| Type               | Part no. |
|--------------------|----------|
| WTB26I-24162122A00 | 1222796  |

Other models and accessories → [www.sick.com/W26](http://www.sick.com/W26)

## Detailed technical data

### Features

|                                        |                                                                   |
|----------------------------------------|-------------------------------------------------------------------|
| <b>Sensor/ detection principle</b>     | Photoelectric proximity sensor, Background suppression            |
| <b>Dimensions (W x H x D)</b>          | 24.6 mm x 82.5 mm x 53.3 mm                                       |
| <b>Housing design (light emission)</b> | Rectangular                                                       |
| <b>Sensing range max.</b>              | 30 mm ... 2,000 mm <sup>1)</sup>                                  |
| <b>Type of light</b>                   | Infrared light                                                    |
| <b>Light source</b>                    | LED <sup>2)</sup>                                                 |
| <b>Light spot size (distance)</b>      | Ø 14 mm (1,000 mm)                                                |
| <b>Wave length</b>                     | 850 nm                                                            |
| <b>Adjustment</b>                      |                                                                   |
| Teach-Turn adjustment 1                | BluePilot: for setting the sensing range                          |
| Teach-Turn adjustment 2                | BluePilot: for configuring the time function                      |
| IO-Link                                | For configuring the sensor parameters and Smart Task functions    |
| <b>Indication</b>                      |                                                                   |
| LED indicator blue 1                   | BluePilot: sensing range indicator                                |
| LED indicator blue 2                   | BluePilot: Time function display                                  |
| LED indicator green                    | Operating indicator<br>Static: power on<br>Flashing: IO-Link mode |

<sup>1)</sup> Object with 90 % reflectance (referred to standard white, DIN 5033).

<sup>2)</sup> Average service life: 100,000 h at T<sub>U</sub> = +25 °C.

|                            |                                                                                              |
|----------------------------|----------------------------------------------------------------------------------------------|
| LED indicator yellow       | Status of received light beam<br>Static on: object present<br>Static off: object not present |
| <b>Pin 2 configuration</b> | External Input (test), Teach-in, switching signal                                            |

<sup>1)</sup> Object with 90 % reflectance (referred to standard white, DIN 5033).

<sup>2)</sup> Average service life: 100,000 h at T<sub>U</sub> = +25 °C.

## Mechanics/electronics

|                                        |                                                                                                                                                                                                                             |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Supply voltage</b>                  | 10 V DC ... 30 V DC <sup>1)</sup>                                                                                                                                                                                           |
| <b>Ripple</b>                          | < 5 V <sub>pp</sub>                                                                                                                                                                                                         |
| <b>Current consumption</b>             | 30 mA <sup>2)</sup><br>50 mA <sup>3)</sup>                                                                                                                                                                                  |
| <b>Switching output</b>                | Push-pull: PNP/NPN                                                                                                                                                                                                          |
| <b>Output: Q<sub>L1</sub> / C</b>      | Switching output or IO-Link mode                                                                                                                                                                                            |
| <b>Output function</b>                 | Factory setting: Pin 2 / white (MF): NPN normally closed (dark switching), PNP normally open (light switching), Pin 4 / black (QL1 / C): NPN normally open (light switching), PNP normally closed (dark switching), IO-Link |
| <b>Switching mode</b>                  | Dark/light switching                                                                                                                                                                                                        |
| <b>Signal voltage PNP HIGH/LOW</b>     | Approx. V <sub>S</sub> – 2.5 V / 0 V                                                                                                                                                                                        |
| <b>Signal voltage NPN HIGH/LOW</b>     | Approx. V <sub>S</sub> / < 2.5 V                                                                                                                                                                                            |
| <b>Output current I<sub>max.</sub></b> | ≤ 100 mA                                                                                                                                                                                                                    |
| <b>Response time</b>                   | ≤ 500 μs <sup>4)</sup>                                                                                                                                                                                                      |
| <b>Switching frequency</b>             | 1,000 Hz <sup>5)</sup>                                                                                                                                                                                                      |
| <b>Time functions</b>                  | Deactivated (factory setting)<br>On delay<br>Off delay<br>ON and OFF delay<br>Impulse (one shot)                                                                                                                            |
| <b>Delay time</b>                      | Teach-turn adjustment, 0 ms ... 30,000 ms, 0 ms (factory setting)                                                                                                                                                           |
| <b>Connection type</b>                 | Male connector M12, 4-pin                                                                                                                                                                                                   |
| <b>Circuit protection</b>              | A <sup>6)</sup><br>B <sup>7)</sup><br>C <sup>8)</sup><br>D <sup>9)</sup>                                                                                                                                                    |
| <b>Protection class</b>                | III                                                                                                                                                                                                                         |
| <b>Weight</b>                          | 80 g                                                                                                                                                                                                                        |
| <b>Housing material</b>                | Plastic, VISTAL®                                                                                                                                                                                                            |
| <b>Optics material</b>                 | Plastic, PMMA                                                                                                                                                                                                               |

<sup>1)</sup> Limit values.

<sup>2)</sup> 16 V DC ... 30 V DC, without load.

<sup>3)</sup> 10 V DC ... 16 V DC, without load.

<sup>4)</sup> Signal transit time with resistive load in switching mode. Different values possible in COM2 mode.

<sup>5)</sup> With light/dark ratio 1:1 in switching mode. Different values possible in IO-Link mode.

<sup>6)</sup> A = V<sub>S</sub> connections reverse-polarity protected.

<sup>7)</sup> B = inputs and output reverse-polarity protected.

<sup>8)</sup> C = interference suppression.

<sup>9)</sup> D = outputs overcurrent and short-circuit protected.

<sup>10)</sup> Replaces IP69K with ISO 20653: 2013-03.

|                                      |                                                                                                             |
|--------------------------------------|-------------------------------------------------------------------------------------------------------------|
| <b>Enclosure rating</b>              | IP66 (According to EN 60529)<br>IP67 (According to EN 60529)<br>IP69 (According to EN 60529) <sup>10)</sup> |
| <b>Ambient operating temperature</b> | -40 °C ... +60 °C                                                                                           |
| <b>Ambient storage temperature</b>   | -40 °C ... +75 °C                                                                                           |
| <b>UL File No.</b>                   | NRKH.E181493 & NRKH7.E181493                                                                                |

- 1) Limit values.  
 2) 16 V DC ... 30 V DC, without load.  
 3) 10 V DC ... 16 V DC, without load.  
 4) Signal transit time with resistive load in switching mode. Different values possible in COM2 mode.  
 5) With light/dark ratio 1:1 in switching mode. Different values possible in IO-Link mode.  
 6) A = V<sub>S</sub> connections reverse-polarity protected.  
 7) B = inputs and output reverse-polarity protected.  
 8) C = interference suppression.  
 9) D = outputs overcurrent and short-circuit protected.  
 10) Replaces IP69K with ISO 20653: 2013-03.

#### Safety-related parameters

|                         |           |
|-------------------------|-----------|
| <b>MTTF<sub>D</sub></b> | 507 years |
| <b>DC<sub>avg</sub></b> | 0%        |

#### Communication interface

|                                       |                                                                                                              |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>Communication interface</b>        | IO-Link V1.1                                                                                                 |
| <b>Communication Interface detail</b> | COM2 (38,4 kBaud)                                                                                            |
| <b>Cycle time</b>                     | 2.3 ms                                                                                                       |
| <b>Process data length</b>            | 16 Bit                                                                                                       |
| <b>Process data structure</b>         | Bit 0 = switching signal Q <sub>L1</sub><br>Bit 1 = switching signal Q <sub>L2</sub><br>Bit 2 ... 15 = empty |
| <b>VendorID</b>                       | 26                                                                                                           |
| <b>DeviceID HEX</b>                   | 0x800184                                                                                                     |
| <b>DeviceID DEC</b>                   | 8388996                                                                                                      |

#### Smart Task

|                            |                                                                                |
|----------------------------|--------------------------------------------------------------------------------|
| <b>Smart Task name</b>     | Base logics                                                                    |
| <b>Logic function</b>      | Direct<br>AND<br>OR<br>Window<br>Hysteresis                                    |
| <b>Timer function</b>      | Deactivated<br>On delay<br>Off delay<br>ON and OFF delay<br>Impulse (one shot) |
| <b>Inverter</b>            | Yes                                                                            |
| <b>Switching frequency</b> | SIO Direct: 1000 Hz <sup>1)</sup><br>SIO Logic: 800 Hz <sup>2)</sup>           |

- 1) SIO Direct: sensor operation in standard I/O mode without IO-Link communication and without using internal sensor logic or time parameters (set to "direct"/"deactivated").  
 2) SIO Logic: Sensor operation in standard I/O mode without IO-Link communication. Sensor-internal logic or timing parameters plus Automation Functions used.  
 3) IOL: Sensor operation with full IO-Link communication and usage of logic, timing and Automation Function parameters.

|                                        |                                  |
|----------------------------------------|----------------------------------|
| <b>Response time</b>                   | IOL: 650 Hz <sup>3)</sup>        |
|                                        | SIO Direct: 500 µs <sup>1)</sup> |
|                                        | SIO Logic: 600 µs <sup>2)</sup>  |
|                                        | IOL: 750 µs <sup>3)</sup>        |
| <b>Repeatability</b>                   | SIO Direct: 150 µs <sup>1)</sup> |
|                                        | SIO Logic: 300 µs <sup>2)</sup>  |
|                                        | IOL: 400 µs <sup>3)</sup>        |
|                                        |                                  |
| <b>Switching signal Q<sub>L1</sub></b> | Switching output                 |
| <b>Switching signal Q<sub>L2</sub></b> | Switching output                 |

<sup>1)</sup> SIO Direct: sensor operation in standard I/O mode without IO-Link communication and without using internal sensor logic or time parameters (set to "direct"/"deactivated").

<sup>2)</sup> SIO Logic: Sensor operation in standard I/O mode without IO-Link communication. Sensor-internal logic or timing parameters plus Automation Functions used.


<sup>3)</sup> IOL: Sensor operation with full IO-Link communication and usage of logic, timing and Automation Function parameters.

## Classifications

|                       |          |
|-----------------------|----------|
| <b>ECI@ss 5.0</b>     | 27270904 |
| <b>ECI@ss 5.1.4</b>   | 27270904 |
| <b>ECI@ss 6.0</b>     | 27270904 |
| <b>ECI@ss 6.2</b>     | 27270904 |
| <b>ECI@ss 7.0</b>     | 27270904 |
| <b>ECI@ss 8.0</b>     | 27270904 |
| <b>ECI@ss 8.1</b>     | 27270904 |
| <b>ECI@ss 9.0</b>     | 27270904 |
| <b>ECI@ss 10.0</b>    | 27270904 |
| <b>ECI@ss 11.0</b>    | 27270904 |
| <b>ETIM 5.0</b>       | EC002719 |
| <b>ETIM 6.0</b>       | EC002719 |
| <b>ETIM 7.0</b>       | EC002719 |
| <b>UNSPSC 16.0901</b> | 39121528 |

## Characteristic curve


WTB26I-xxxxx1xx

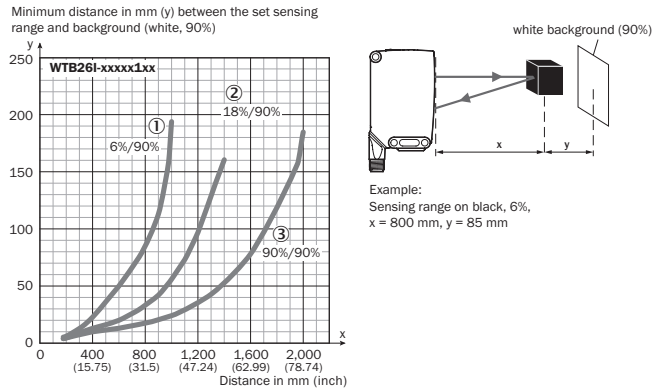


- ① Sensing range on black, 6% remission
- ② Sensing range on gray, 18 % remission
- ③ Sensing range on white, 90% remission

## Light spot size

WTB26I-xxxxx1xx

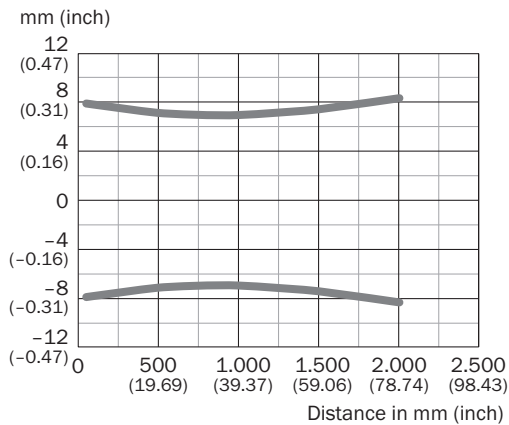

## Sensing range diagram

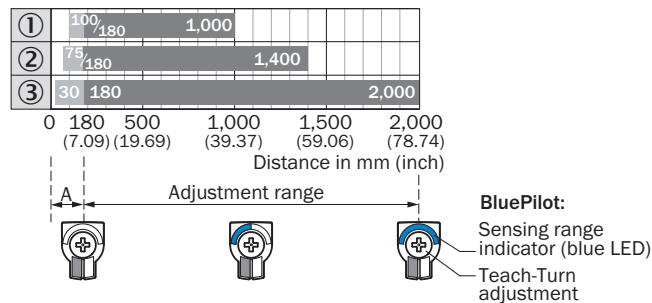


A = Detection distance (depending on object remission)

- ① Sensing range on black, 6% remission
- ② Sensing range on gray, 18 % remission
- ③ Sensing range on white, 90% remission

## Adjustments


Display and adjustment elements



- ① LED indicator green
- ② LED indicator yellow
- ③ Teach-Turn adjustment 1
- ④ LED indicator blue 1
- ⑤ Teach-Turn adjustment 2
- ⑥ LED indicator blue 2

## Dimensional drawing (Dimensions in mm (inch))

WTB26, WTL26, WTF26, connector

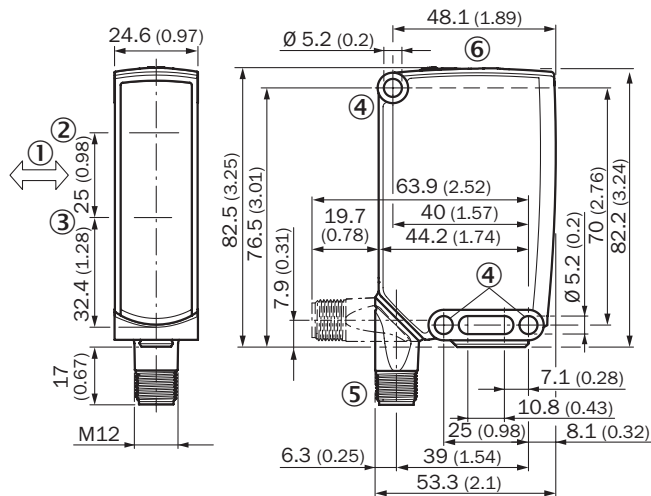

- ① Standard direction of the material being detected
- ② Center of optical axis, sender
- ③ Center of optical axis, receiver
- ④ Mounting hole, Ø 5.2 mm
- ⑤ Connection
- ⑥ Display and adjustment elements

## Recommended accessories

Other models and accessories → [www.sick.com/W26](http://www.sick.com/W26)

|                             | Brief description                                                                                                                                                                                    | Type        | Part no. |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----------|
| Universal bar clamp systems |                                                                                                                                                                                                      |             |          |
|                             | Plate N12 for universal clamp. For mounting PL30A, P250 reflectors, W27 and WTR2 sensors., Zinc plated steel (sheet), Zinc die cast (clamping bracket), Universal clamp (2022726), mounting hardware | BEF-KHS-N12 | 2071950  |

|                                                                                   | Brief description                                                                                                                     | Type               | Part no. |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------|
| Plug connectors and cables                                                        |                                                                                                                                       |                    |          |
|  | Head A: female connector, M12, 4-pin, straight, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PVC, unshielded, 5 m | YF2A14-050VB3XLEAX | 2096235  |
|  | Head A: male connector, M12, 4-pin, straight<br>Head B: -<br>Cable: unshielded                                                        | STE-1204-G         | 6009932  |

## Recommended services

Additional services → [www.sick.com/W26](https://www.sick.com/W26)

|                                                                                                                                                                                                                                                                                                                                                           | Type                   | Part no.   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------------|
| Function Block Factory                                                                                                                                                                                                                                                                                                                                    |                        |            |
| <ul style="list-style-type: none"> <li><b>Description:</b> The Function Block Factory supports common programmable logic controllers (PLCs) from various manufacturers, such as Siemens, Beckhoff, Rockwell Automation and B&amp;R. More information on the FBF can be found <a _blank"="" href="https://fbf.cloud.sick.com target=">here</a>.</li> </ul> | Function Block Factory | On request |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

**For us, that is “Sensor Intelligence.”**

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)